


On-load tap-changer type UCGR./III, VUCGR./III, UCLR./III, VUCLR./III, UCDR./III, 29 tap positions, plus/minus switching.
 Max. effective No. of turns in pos. 1.
 The tap-changer is delivered set in pos. 15,
 the preceding pos. was 15A.

Lindningskopplare typ UCGR./III, VUCGR./III, UCLR./III, VUCLR./III, UCDR./III, 29 lägen, plus/minus koppling.
 Max antal effektiva varv i läge 1.
 Lindningskopplaren levereras inställd i läge 15,
 föregående läge var 15A.

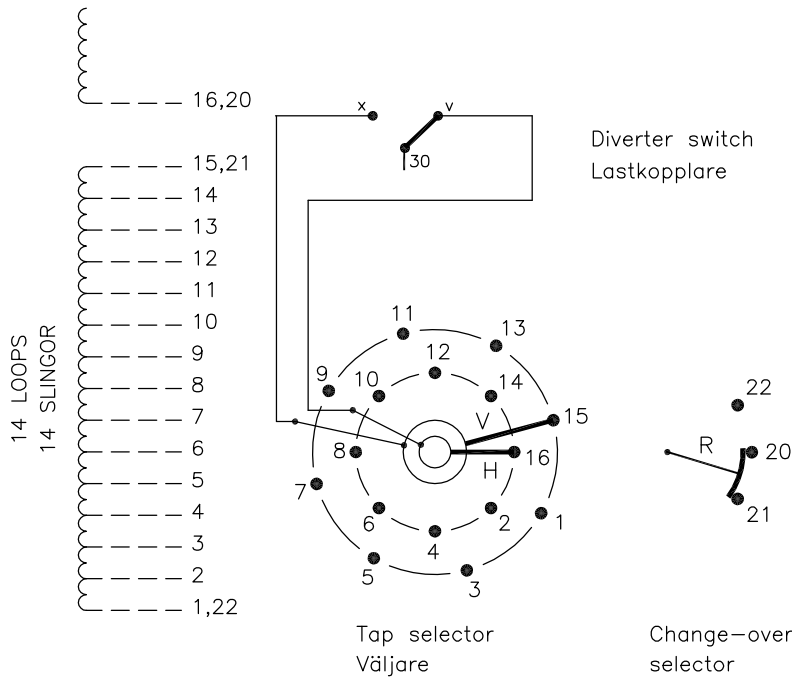

The tap-changer is shown in pos. 15,
 the preceding pos. was 15A.
 The tap selector and the change-over selector
 are seen from above.
 Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 15,
 föregående läge var 15A.
 Väljaren och plus/minus-omkopplaren sedda uppifrån.
 Kontaktarm V ligger över kontaktarm H.

Continuous lines show leads included in the
 tap-changer. Dashed lines show leads belonging
 to the cleats and leads.

Heldragna linjer visar ledare som ingår i
 lindningskopplaren. Streckade linjer visar
 ledare som tillhör anslutningsdonet.

2	VUCL Added	CA	12	37
1	VUCG Added	CE	07	47
Rev Ind	Revision	Appd	Year	Week

Accepted by qual control R.Yngvesson	Accepted for prod by	Description (English) CONNECTION DIAGRAM	DATA ORIGINAL
Design checked by B-O.Stenestam	Drawn by L.Bergman	Description (own language) KOPPLINGSSHEMA	File name 0368-11
Drawing checked by M.Hedlund	Issued by Dept Year Week COM/TKO 97 16	5492 0368-11	Lang 1
Asea Brown Boveri			RevInd -

Pos. Läge	R connects in direction R förbinder i riktning	Tap selector and diverter switch connect Väljaren och lastkopplaren förbinder
1		1-V-x
2		2-H-v
3		3-V-x
4		4-H-v
5		5-V-x
6		6-H-v
7		7-V-x
8	20-21	8-H-v
9		9-V-x
10		10-H-v
11		11-V-x
12		12-H-v
13		13-V-x
14		14-H-v
15A		15-V-x
15		16-H-v
15B		1-V-x
16		2-H-v
17		3-V-x
18		4-H-v
19		5-V-x
20		6-H-v
21		7-V-x
22	20-22	8-H-v
23		9-V-x
24		10-H-v
25		11-V-x
26		12-H-v
27		13-V-x
28		14-H-v
29		15-V-x

A position with letter is a
 through position and gives
 the same voltage as the
 normal position.

Läge med bokstav är genom-
 loppsläge och ger samma
 spänning som normalläget.

We reserve all rights in this document and in the
 information contained therein. Reproduction, use or
 disclosure to third parties without express authority
 is strictly forbidden. © ABB '99

Sheet	Cont
Year	Week
Dept	
RevInd	Revision
Design checked by	
Form No.	