


On-load tap-changer type UCGR./III, VUCGR./III, UCLR./III, VUCLR./III, UCDR./III, 23 tap positions, plus/minus switching.

Max. effective No. of turns in pos. 1.
The tap-changer is delivered set in pos. 12,
the preceding pos. was 11.

Lindningskopplare typ UCGR./III, VUCGR./III, UCLR./III, VUCLR./III, UCDR./III, 23 lägen, plus/minus koppling.

Max antal effektiva varv i läge 1.
Lindningskopplaren levereras inställd i läge 12,
föregående läge var 11.

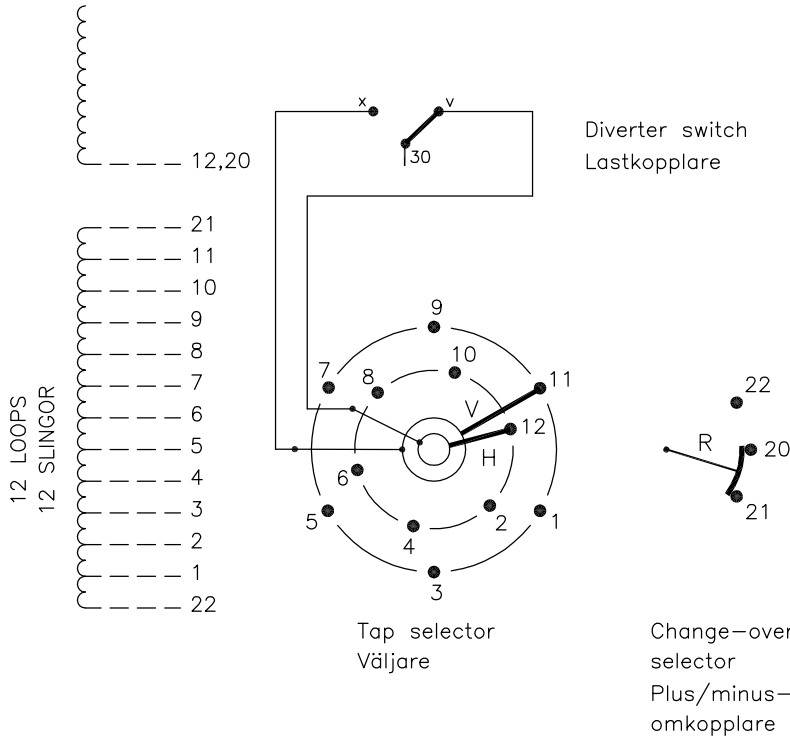

Pos. Läge	R connects in direction R förbinder i riktning	Tap selector and diverter switch connect Väljaren och lastkopplaren förbinder
1		1-V-x
2		2-H-v
3		3-V-x
4		4-H-v
5		5-V-x
6	20-21	6-H-v
7	20-21	7-V-x
8		8-H-v
9		9-V-x
10		10-H-v
11		11-V-x
12		12-H-v
13		1-V-x
14		2-H-v
15		3-V-x
16		4-H-v
17		5-V-x
18	20-22	6-H-v
19	20-22	7-V-x
20		8-H-v
21		9-V-x
22		10-H-v
23		11-V-x

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © ABB '19

The tap-changer is shown in pos. 12,
the preceding pos. was 11.
The tap selector and the change-over selector
are seen from above.
Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 12,
föregående läge var 11.
Väljaren och plus/minus-omkopplaren sedda uppifrån.
Kontaktarm V ligger över kontaktarm H.

Continuous lines show leads included in the
tap-changer. Dashed lines show leads belonging
to the cleats and leads.

Heldragna linjer visar ledare som ingår i
lindningskopplaren. Streckade linjer visar
ledare som tillhör anslutningsdonet.

2	VUCL Add	CA	12	37
1	VUCG Add	CE	07	47
Rev Ind	Revision	Appd	Year	Week

Accepted by qual control R.Yngvesson	Accepted for prod by	Description (English) CONNECTION DIAGRAM	DATA ORIGINAL
Design checked by B-O.Stenestam	Drawn by L.Bergman	Description (own language) KOPPLINGSSHEMA	File name 0368-8
Drawing checked by M.Hedlund	Issued by Dept Year Week COM/TKO 97 16	5492 0368-8	Lang Sheet 1
Asea Brown Boveri			Revind Cont -