

AF range contactors / CP-C, -S, -E, -T range power supply units

Primary switch mode power supply units for supplying contactors with electronic coil

The following table shows which of our power supply units can safely switch-on and operate each size of ABB contactor with electronic coil.

Assignment of the devices under the following conditions:

The power supply units have been loaded with contactors only. There was no additional load.
 The contactors have been actuated in cold state or after thermally built-up hold power.
 The single-phase power supply units have been tested on the primary side with 115 and 230 V AC.
 The three-phase power supply units have been tested on the primary side with 400 V AC.
 The secondary voltage was in both cases 24 V DC.

Co-ordination parameters

Average pick-up current of the contactors ≈ Max. load operating point of the power supply units
 Ambient temperature range: 0...70 °C
 Switching frequency: 120/h
 Mounting position of the contactors: horizontal
 Wire length: 2 x 2.5 m
 Cross section: 1.5 mm²

Result / Co-ordination table

Type of contactor	Operating range of the coil (V)	Average pick-up power of the coil (W)	Average pick-up current (A) at 24V DC	CP-C 24/5.0	CP-S 24/5.0	CP-E 24/5.0	CP-T 24/5.0	CP-C 24/10.0	CP-S 24/10.0	CP-E 24/10.0	CP-T 24/10.0	CP-C 24/20.0	CP-S 24/20.0	CP-E 24/20.0	CP-T 24/20.0	CP-T 24/40.0
				Max. load operating point of the power supply units (A)												
				7,3	7,3	6,4	6,0	12,3	12,3	13,5	13,0	22,5	22,5	25,0	25,0	45,0
AF-45 AF-50 AF-63 AF-75	20...60	190	7,9	x(*1)	x(*1)	n.a	n.a	x	x	x	x	x	x	x	x	x
AF-95 AF-110		400	16,7	n.a	n.a	n.a	n.a	n.a	n.a	n.a	n.a	x	x	x	x	x
AF-145 AF-185		500	20,8	n.a	n.a	n.a	n.a	n.a	n.a	n.a	n.a	x	x	x	x	x
AF-210 AF-300		520	21,7	n.a	n.a	n.a	n.a	n.a	n.a	n.a	n.a	x	x	x	x	x
AF-400 AF-460	24...60	990	41,2	n.a	n.a	n.a	n.a	n.a	n.a	n.a	n.a	n.a	n.a	n.a	n.a	x
AF-580 AF-750		950	39,6	n.a	n.a	n.a	n.a	n.a	n.a	n.a	n.a	n.a	n.a	n.a	n.a	x
Note (*1)	The pick-up current of the contactors exceeds the max. load operating point of the power supply units CP-C 24/5.0 and CP-S 24/5.0 slightly (8%). Due to the sufficient acceleration of the mechanical parts inside the contactor during the pick-up phase, the co-ordination of the units is nevertheless guaranteed.															

Example of supply of the contactor AF-750

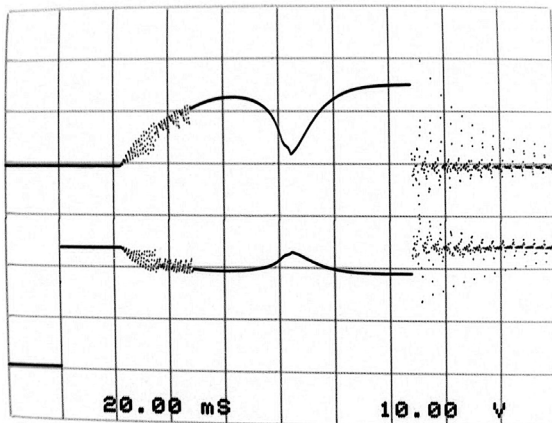


Fig. 1: Functioning supply with power supply unit CP-T 24/40.0

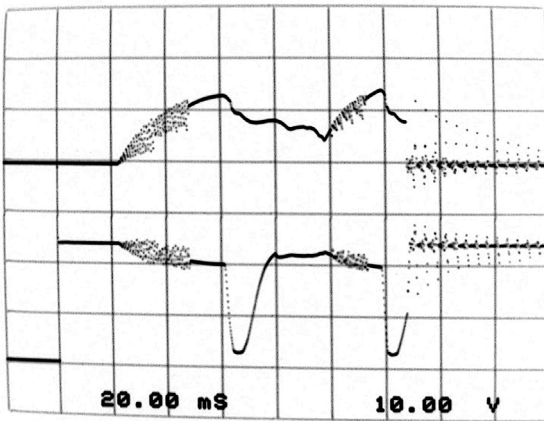


Fig. 2: Critical supply with power supply unit CP-T 24/20.0

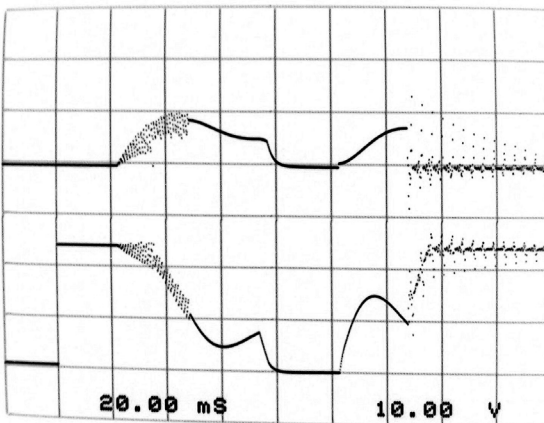


Fig. 3: Non functioning supply with power supply unit CP-T 24/10.0

Contact us

ABB STOTZ-KONTAKT GmbH

Eppelheimer Straße 82
69123 Heidelberg, Germany
Phone: +49 (0) 6221 701-0
Fax: +49 (0) 6221 701-1325
E-mail: info.desto@de.abb.com
<http://www.abb.com/lowvoltage>
-> Control Products

www.abb.com/contacts

Note:

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG.

Copyright© 2010 ABB
All rights reserved