

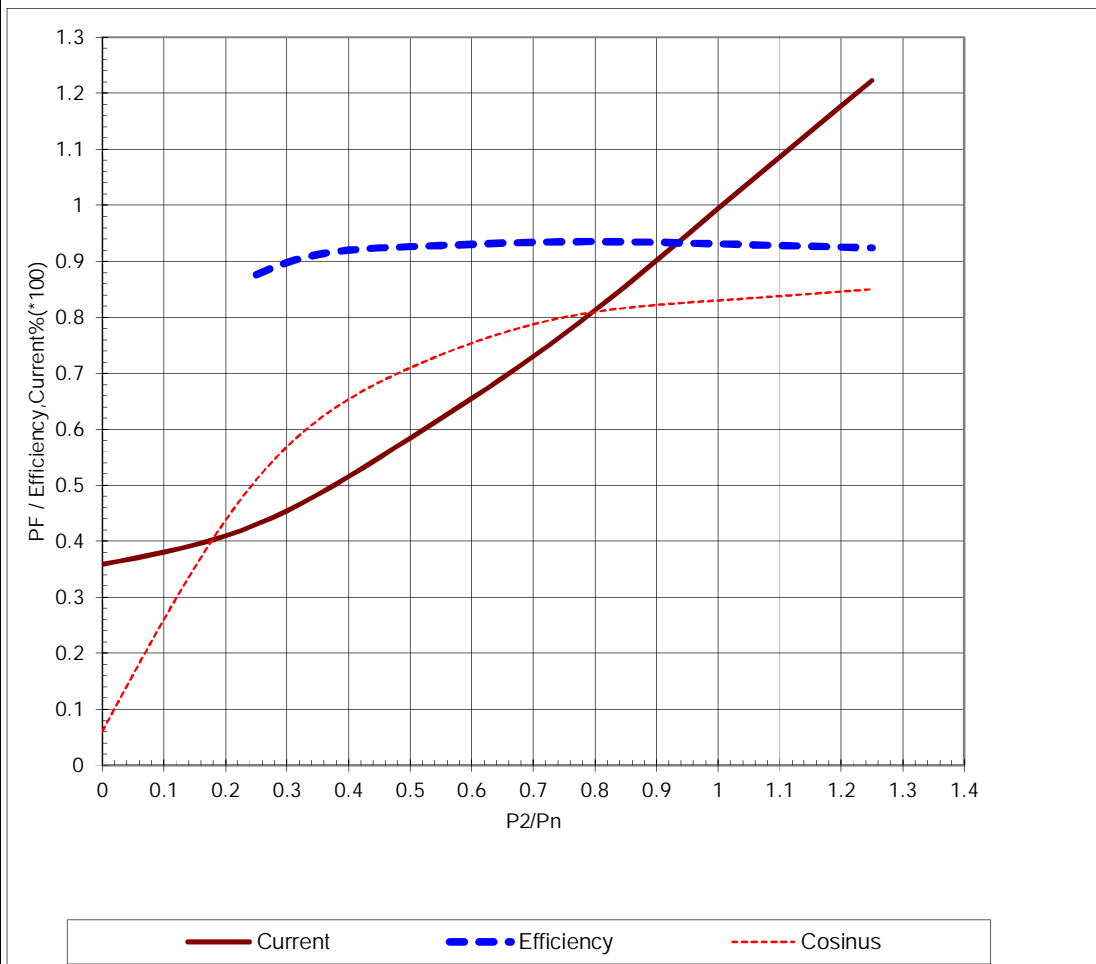


ABB Motors and Generators		Technical Data Sheet				
Department/Author		Project	Location		Item name	
Our ref.		Rev/Changed by	Date of issue	Saving ident	Pages	
		A	1/16/2019	untitled.xls	1.00001 1(3)	
No.	Definition	Data	Unit	Remarks		
1	Product	TEFC, 3-phase, squirrel cage induction motor				
2	Product code	3GBA 222 220-ADCIN		Calc. ref.	3GZH021022-3	
3	Type/Frame	M2BAX 225SMB 4				
4	Mounting	IM1001, B3(foot)				
5	Rated output P _N	45	kW			
6	Service factor	1				
7	Type of duty	S1 100%				
8	Rated voltage U _N	415	VD	+10, -10 %		
9	Rated frequency f _N	50	Hz	+5, -5 %		
10	Rated speed n _N	1478	r/min			
11	Rated current I _N	81.5	A			
12						
13	Starting current I _s /I _N	7				
14	Nominal torque T _N	291	Nm			
15	Locked rotor torque T _S /T _N	2.2				
16	Maximum torque T _{max} /T _N	2.9				
17						
18						
Load characteristics		Load %	Current A	Efficiency %	Power factor	
19	PLL determined from residual loss	100	81.5	93.1 / IE2	0.83	
20		75	62.8	93.5	0.8	
21		50	47.6	92.6	0.71	
22						
23	Thermal withstand time hot	15	s			
24	Thermal withstand time cold	24	s			
25	Insulation class / Temperature class	F / B				
26	Ambient temperature	50	°C			
27	Altitude	1000 m.a.s.l.				
28	Degree of protection	IP55				
29	Cooling system	IC411 self ventilated				
30	Bearing DE/NDE	6313-2Z/C3 - 6210-2Z/C3				
31	Sound pressure level (LP dB(A) 1m)	79	dB(A)	at no-load		
32	Moment of inertia J = ¼ GD ²	0.4314	kg·m ²			
33	Position of terminal box	Top				
34	Direction of rotation	Bi-directional				
35	Weight of rotor	98	kg			
36	Total weight of motor	304	kg			
37						
38						
39						
40						
41						
42						
43						
44						
45						
Ex-motors						
46						
47						
48						
Option Variant Codes / Definition						
49						
50						
51						
52						
Remarks:						
Data based on situation 9/19/2015						

All performance values are subject to IS/IEC tolerances

ABB Motors and Generators	Load Curves		
	Project	Location	
Department/Author	Customer name	Customer ref.	Item name 1.00001
Our ref.	Rev/Changed by A	Date of issue 1/16/2019	Saving ident untitled.xls
Pages	2(3)		
Product	TEFC, 3-phase, squirrel cage induction motor		
Type/Frame	M2BAX 225SMB 4	Calc. ref.	3GZH021022-3
Product code	3GBA 222 220-ADCIN		
Rated output P _N	45 kW		
Type of duty	S1 100%		

Voltage (V)	415	Current I _N (A)	81.5	Power factor at P _N	0.83
Frequency (Hz)	50	Speed (r/min)	1478	Efficiency (%) at P _N	93.1



Data based on situation 9/19/2015

All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004


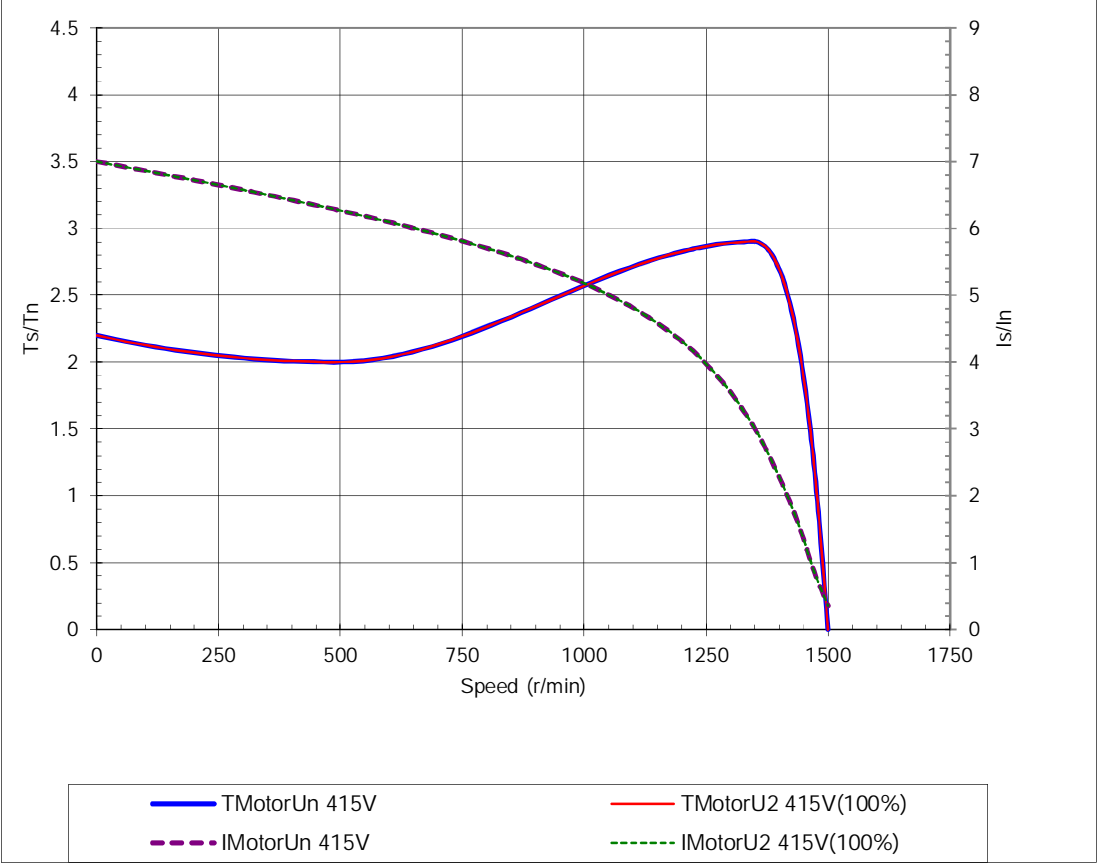
ABB Motors and Generators	Starting Curves			
	Project	Location		
Department/Author	Customer name	Customer ref.	Item name 1.00001	
Our ref.	Rev/Changed b	Date of issue	Saving ident	Pages
	A	1/16/2019	untitled.xls	3(3)
Type of product	TEFC, 3-phase, squirrel cage induction motor			
Type/Frame	M2BAX 225SMB 4	Calc. ref.	3GZH021022-3	
Product code	3GBA 222 220-ADCIN	Frequency (Hz)	50	
Rated output P _N	45 kW	Rated current I _N	81.5	A
Type of duty	S1 100%			
J _{motor} (kgm ²)	0.43	Voltage (V) 100%	415	Voltage (V) 415V(100%)
J _{load} (kgm ²)		T _{start} /T _N	2.2	T _{start} /T _N 2.2
Speed (r/min)	1478	Starting time (s)	0.1	Starting time (s)
T _N (Nm)	291	Speed (r/min)		Speed (r/min)
T _{load} (Nm)		I _s /I _N	7	I _s /I _N 7
		T _{max} /T _N	2.9	T _{max} /T _N 2.9
				
<p>Data based on situation 9/19/2015</p> <p>All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004</p>				


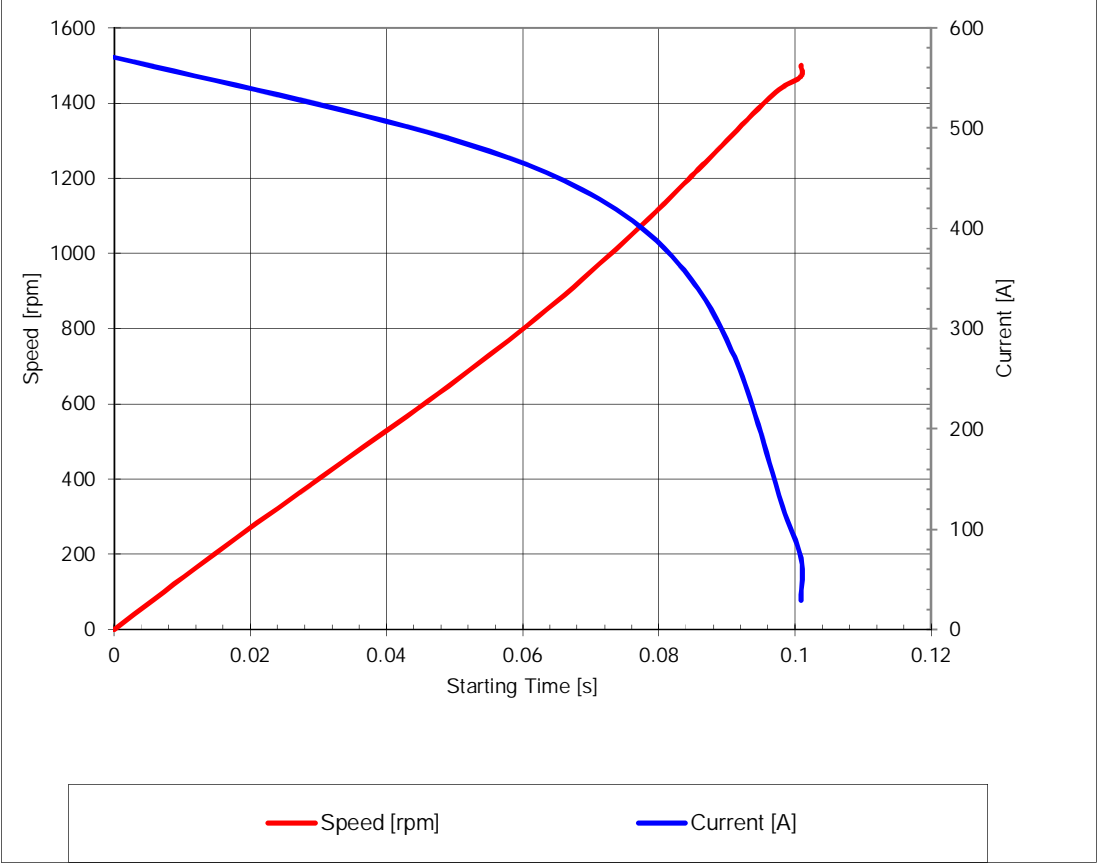

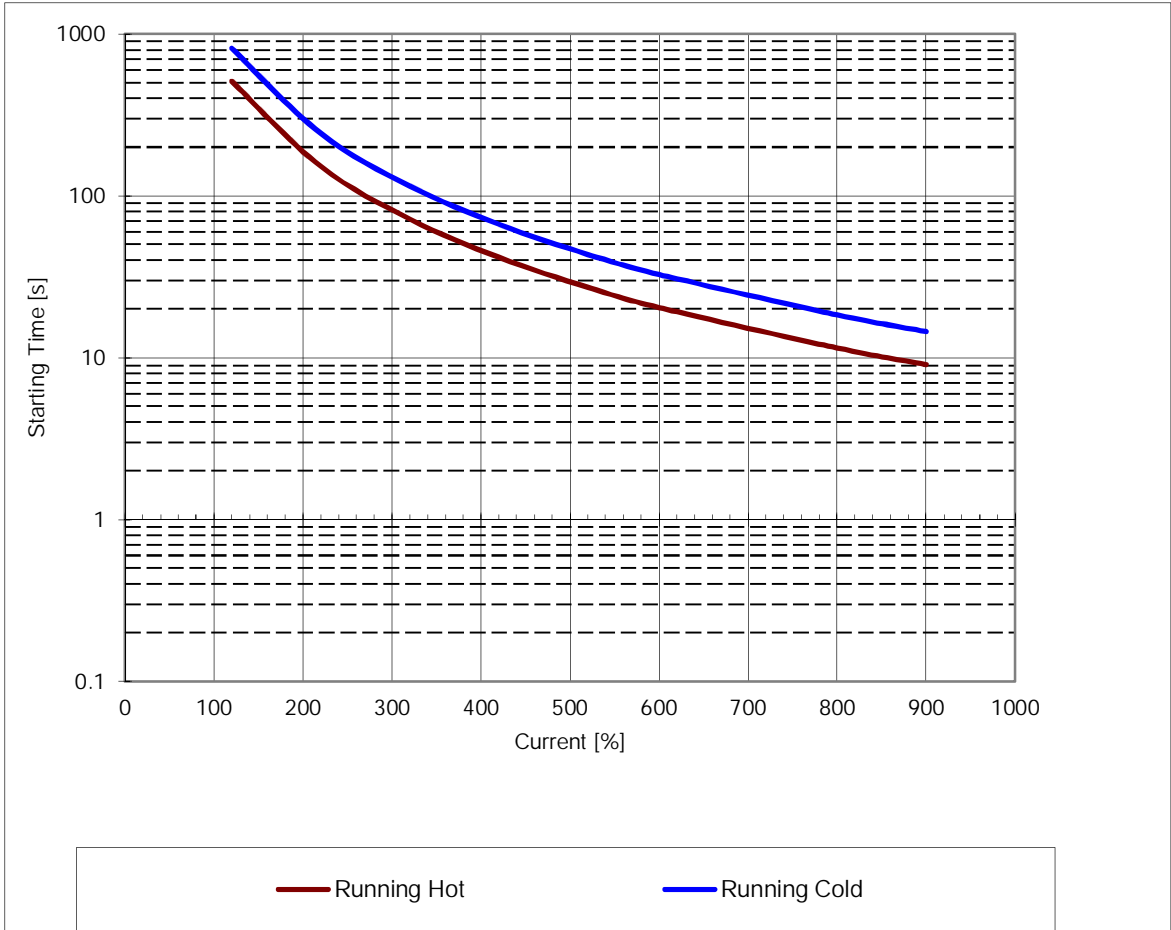
ABB Motors and Generators	Current & Speed Vs Time			
	Project	Location		
Department/Author	Customer name	Customer ref.		Item name 1.00001
Our ref.	Rev/Changed b	Date of issue	Saving ident	Pages 4(3)
	A	1/16/2019	untitled.xls	
Type of product	TEFC, 3-phase, squirrel cage induction motor			
Type/Frame	M2BAX 225SMB 4	Calc. ref.	3GZH021022-3	
Product code	3GBA 222 220-ADCIN	Frequency (Hz)	50	
Rated output P _N	45 kW	Rated current I _N	81.5	A
Type of duty	S1 100%			
J _{motor} (kgm ²)	0.43	Voltage (V) 100%	415	Voltage (V) 415V(100%)
J _{load} (kgm ²)		T _{start} /T _N	2.2	T _{start} /T _N 2.2
Speed (r/min)	1478	Starting time (s)	0.1	Starting time (s)
T _N (Nm)	291	Speed (r/min)		Speed (r/min)
T _{load} (Nm)		I _s /I _N	7	I _s /I _N 7
		T _{max} /T _N	2.9	T _{max} /T _N 2.9
 <p>Speed [rpm] vs Starting Time [s] and Current [A]</p>				
<p>Data based on situation 9/19/2015</p> <p>All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004</p>				

ABB Motors and Generators	Thermal Withstand Curve		
	Project	Location	
Department/Author	Customer name	Customer ref.	Item name 1.00001
Our ref.	Rev/Changed b Date of issue A 1/16/2019	Saving ident untitled.xls	Pages 5(3)

Type of product	TEFC, 3-phase, squirrel cage induction motor		
Type/Frame	M2BAX 225SMB 4	Calc. ref.	3GZH021022-3
Product code	3GBA 222 220-ADCIN	Frequency (Hz)	50
Rated output P _N	45 kW	Rated current I _N	81.5 A
Type of duty	S1 100%		

J _{motor} (kgm ²)	0.43	Voltage (V) 100%	415	Voltage (V)	415V(100%)
J _{load} (kgm ²)		T _{start} /T _N	2.2	T _{start} /T _N	2.2
Speed (r/min)	1478	Starting time (s)	0.1	Starting time (s)	
T _N (Nm)	291	Speed (r/min)		Speed (r/min)	
T _{load} (Nm)		I _s /I _N	7	I _s /I _N	7
		T _{max} /T _n	2.9	T _{max} /T _n	2.9



Data based on situation 9/19/2015
 All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004