


MULTIPLES OF CURRENT RATING (In)

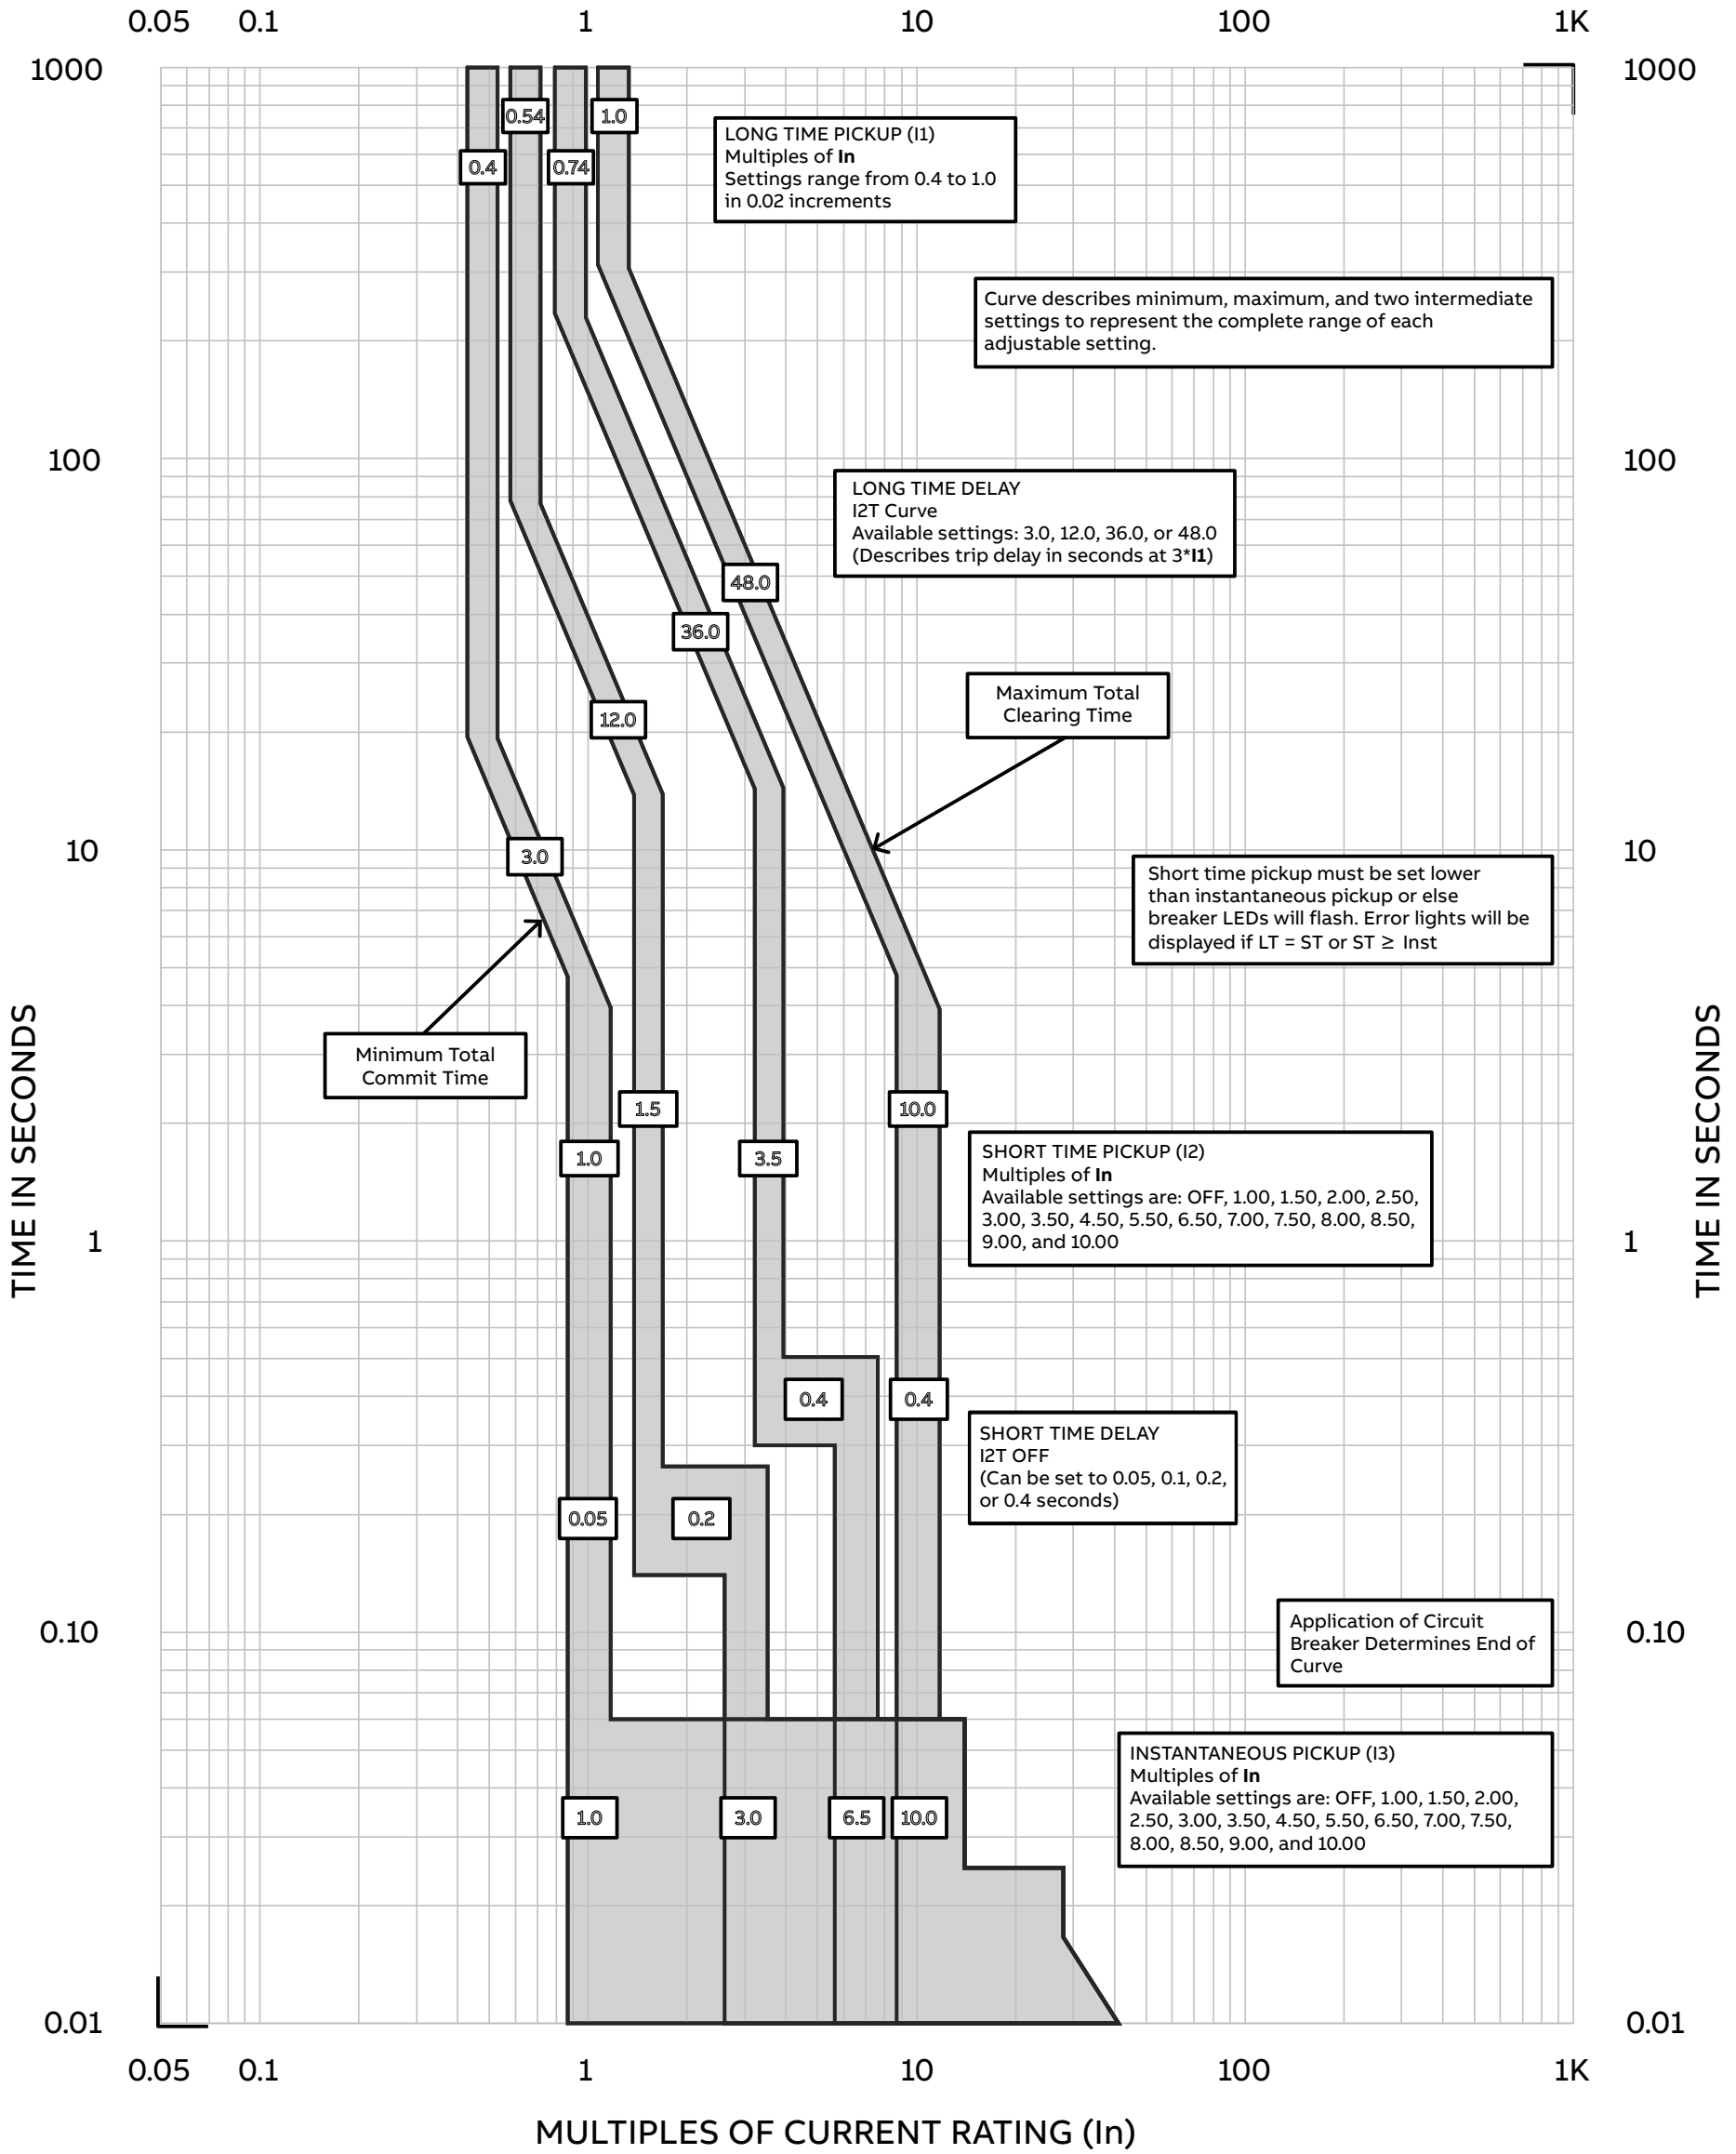

Time Current Curve

Available Ratings (Amperes)

Type	Model	Trip Unit	Frame Amps	Current Rating (In)
MCCB	XT5	Ekip DIP	400/600	250 400 300 600

Voltage Rating: 600Vac, 50 to 60 hz systems

electrification.us.abb.com

Molded Case Circuit Breaker

Type Tmax XT5 with Ekip DIP LSI/LSIG Trip Unit
Short time I2T OFF

Operating Conditions: Curve represents trip with no prior load. Curves apply at 50 to 60 Hertz with reference ambient temperature of 40°C at 2000m altitude with three phase fault applied. Refer to technical guide from the UL catalog for more information regarding thermal application.

Instantaneous Override: When instantaneous protection is turned off, the breaker will immediately trip for any current that is equal to or greater than **8000A** plus 25.0% or minus 15.62%.

Ground Fault: Refer to TCC 9AKK108468A0479 for ground fault curve