


## CUSTOMER SIDE:

1. Printer/Console Port Settings:
  - 9600 Baud
  - Remote MMI
  - Listen Cycle = 0
  - Interface = RS232
  - Data Bits = 8
  - Stop Bits = 1
  - Parity = None
2. Warm Start Btu Transmitter after making changes to Printer/Console Port settings.
3. Satellite phone should be set up correctly when received. If not working properly, use HyperTerminal in Windows to verify and/or change the follow parameters.

AT&V (Displays stored configuration profile)  
AT&W (Stores active configuration profile)

AT&D0  
AT&C1  
AT+ICF=3  
AT+WKSIZ=15  
ATWRTL=120,240  
ATWTTL=120,240  
ATWRATE=2400,9600  
ATWXR=2  
ATWS45=1  
ATE1  
ATQ0  
ATV1  
ATX4  
ATS0=1  
ATS2=43  
ATS4=10  
ATS5=8  
ATS12=50

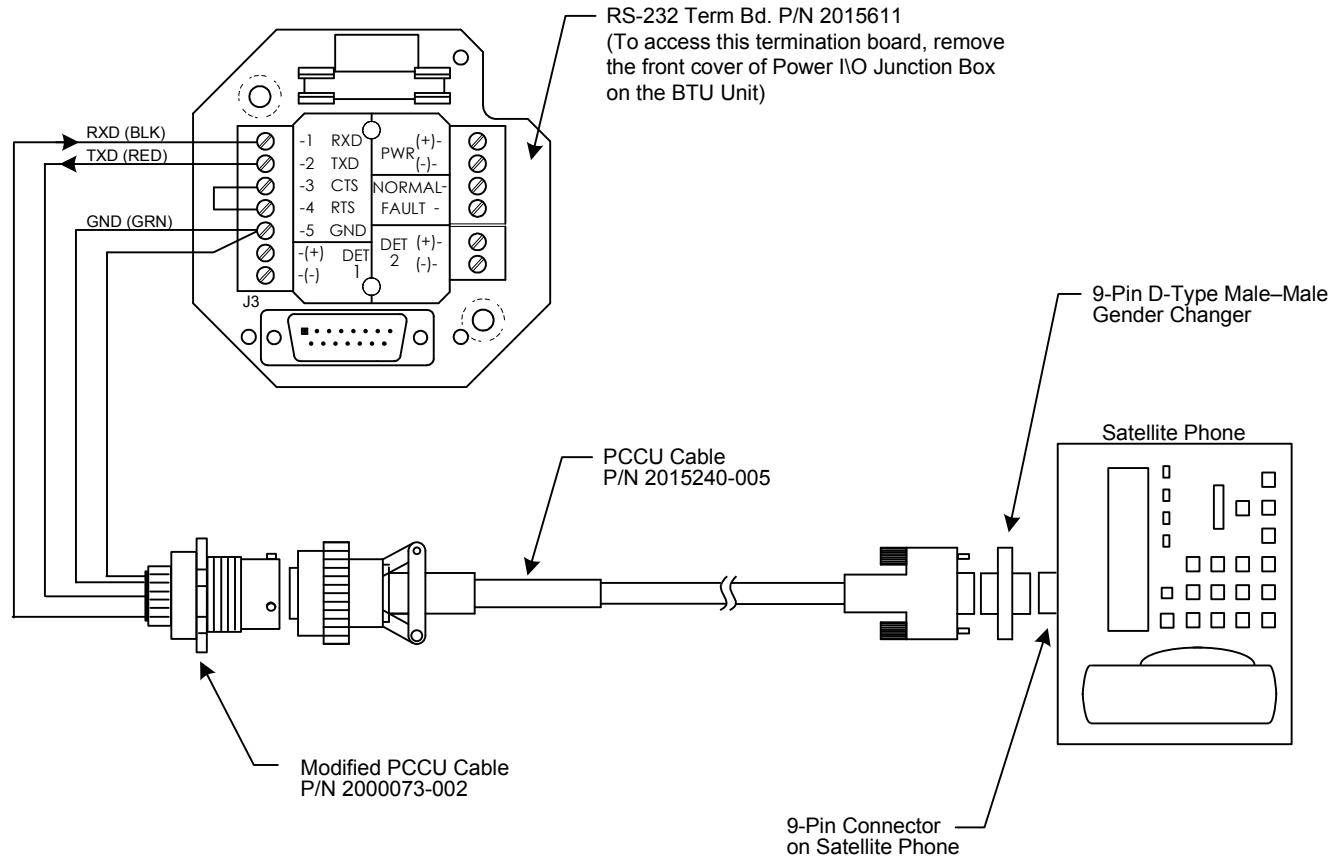

## HOST SIDE (TOTALFLOW):

1. Device Settings:
  - 9600 Baud
  - Modem
  - Link Time = 0
  - Remote Device Timeout = 30 sec.
  - Packet Size = 1 KB
  - Block Size = 256 KB
  - Stop Bits = 1
  - Parity = None
  - Max Time to Wait for CPC = 500 sec.
2. CPC Settings:
  - Regular Modem Settings
  - Character Timeout = 20 sec.
  - Wait For Connect = 45
  - Hang-Up Delay = 60
  - Max. Modem Speed = 9600
  - Port delays may not be necessary



TOTALFLOW  
Products

ACTION  
D21570

DOC TYPE  
UD

TITLE  
BTU 8000 PRINTER CONSOLE PORT  
TO NERA M4 SATELLITE PHONE

DWG NO.  
2101912

REV  
AC

SHEET  
1 OF 1