


**NOTES:**

- WARNING:** This drawing does not illustrate completely the installation methods required for hazardous locations. Prior to any installation in a Classified Hazardous Location, verify installation methods by the Control Drawing referenced on the product's name tag and national and local codes.
- Depending on power from port, the RS-485/232 Converter will transmit up to 4000 ft. @ 115.2k baud.



If the BTU Transmitter is the last device on the Bus, or if it is the only device, jumper J7 Pin-1 to Pin-2.

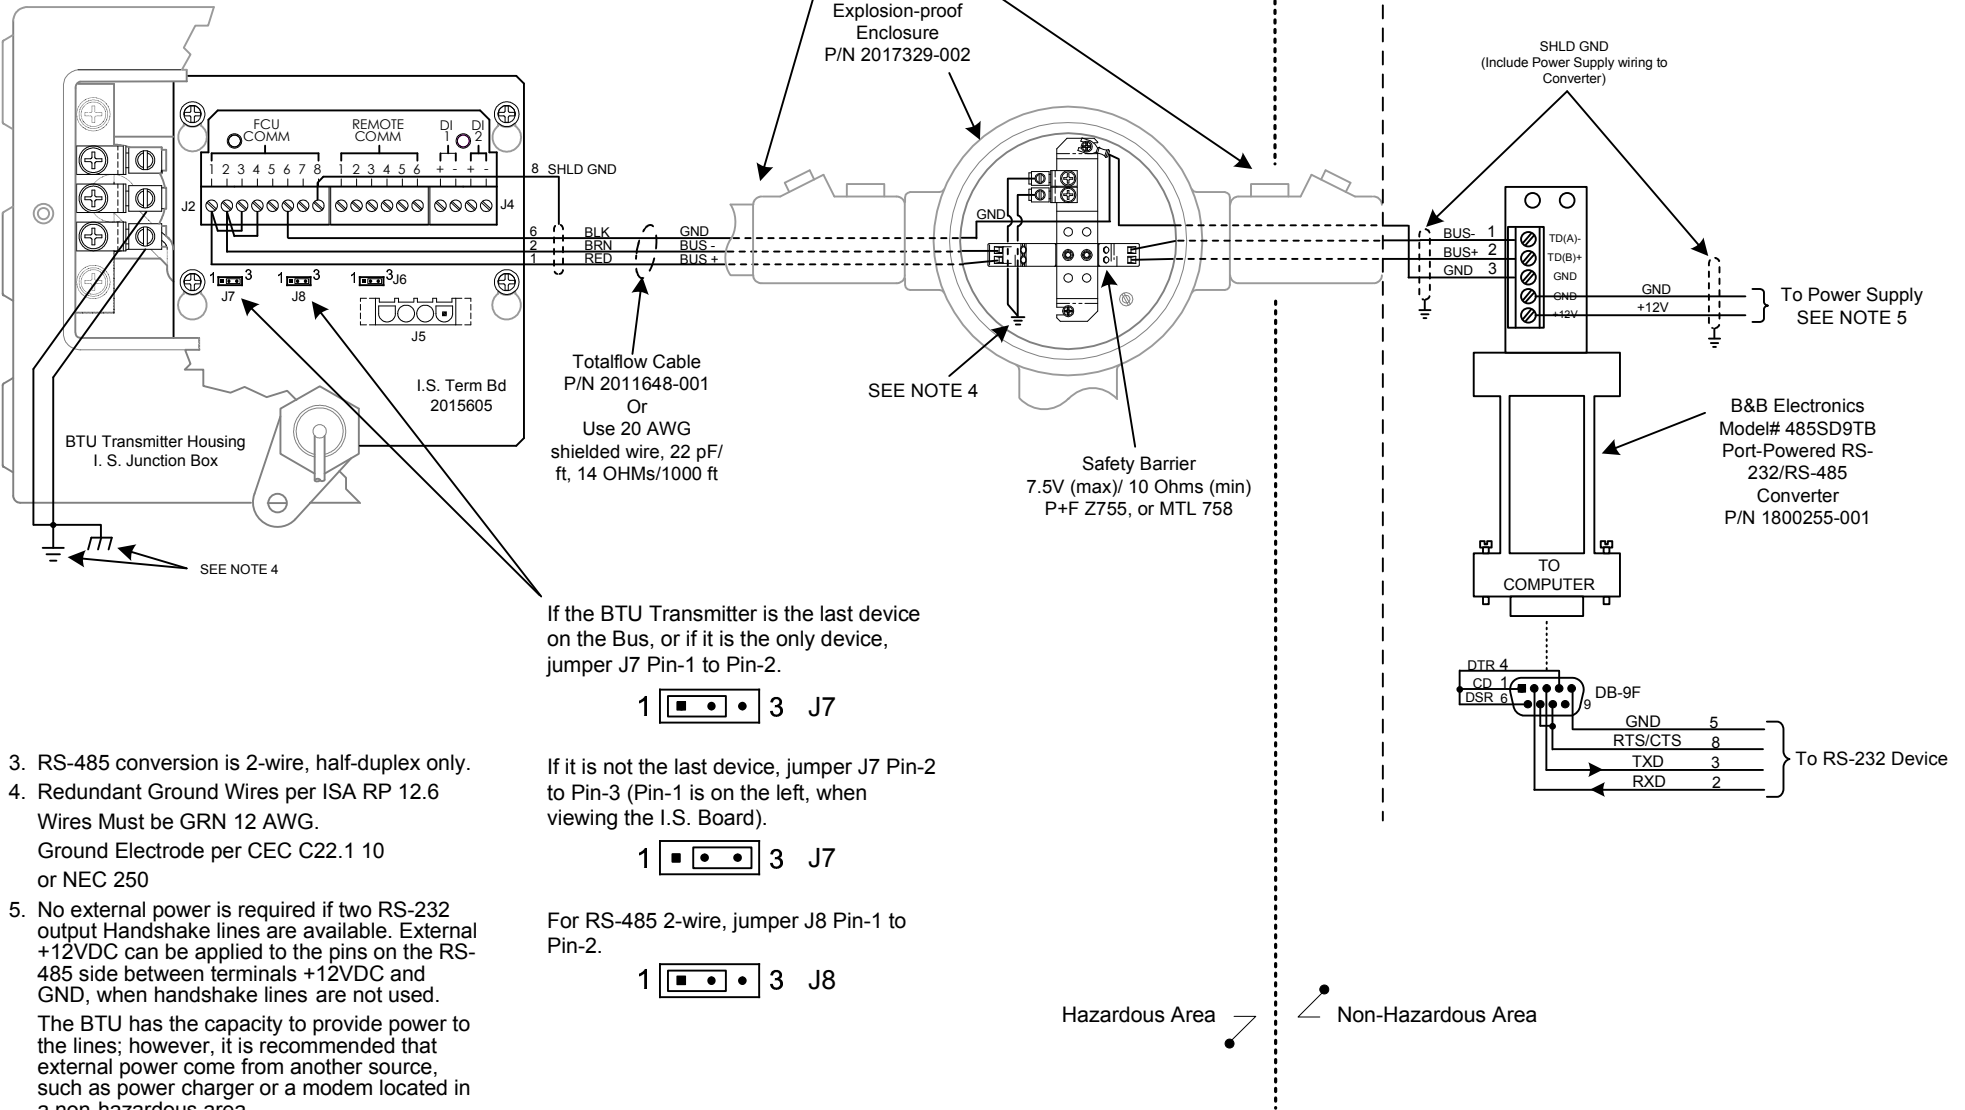

- RS-485 conversion is 2-wire, half-duplex only.
- Redundant Ground Wires per ISA RP 12.6 Wires Must be GRN 12 AWG. Ground Electrode per CEC C22.1 10 or NEC 250

If it is not the last device, jumper J7 Pin-2 to Pin-3 (Pin-1 is on the left, when viewing the I.S. Board).



- No external power is required if two RS-232 output Handshake lines are available. External +12VDC can be applied to the pins on the RS-485 side between terminals +12VDC and GND, when handshake lines are not used. The BTU has the capacity to provide power to the lines; however, it is recommended that external power come from another source, such as power charger or a modem located in a non-hazardous area.

For RS-485 2-wire, jumper J8 Pin-1 to Pin-2.



Use 35mA maximum current draw under normal operation, when externally powered.

REF: N/A

<b>ABB</b>	TOTALFLOW Products	ACTION L19078	DOC TYPE UD	TITLE BTU8000/8100 FCU COMM PORT RS-485 2-WIRE W/GND W/ABB BARRIER TO B&B CONV RS-232	DWG NO. 2102909	REV AA	SHEET 1 OF 1