


3D Model is the Master Document of Record
As-built or Modified Must Conform to IEC/UL Procedure 5900000 Sec.14
As-built or Modified Must Conform to IEC/UL Procedure 5900000 Sec.15
Part Must Conform to 5900000 Sec.4 Torque Procedure
Geometric Dimensioning & Tolerancing as per ASME Y14.5-2009

ABB PROPRIETARY AND CONFIDENTIAL INFORMATION
The information contained in this document has to be kept strictly confidential.
Any unauthorized disclosure of this information may result in legal action.
Copyright 2018 ABB. All rights reserved.

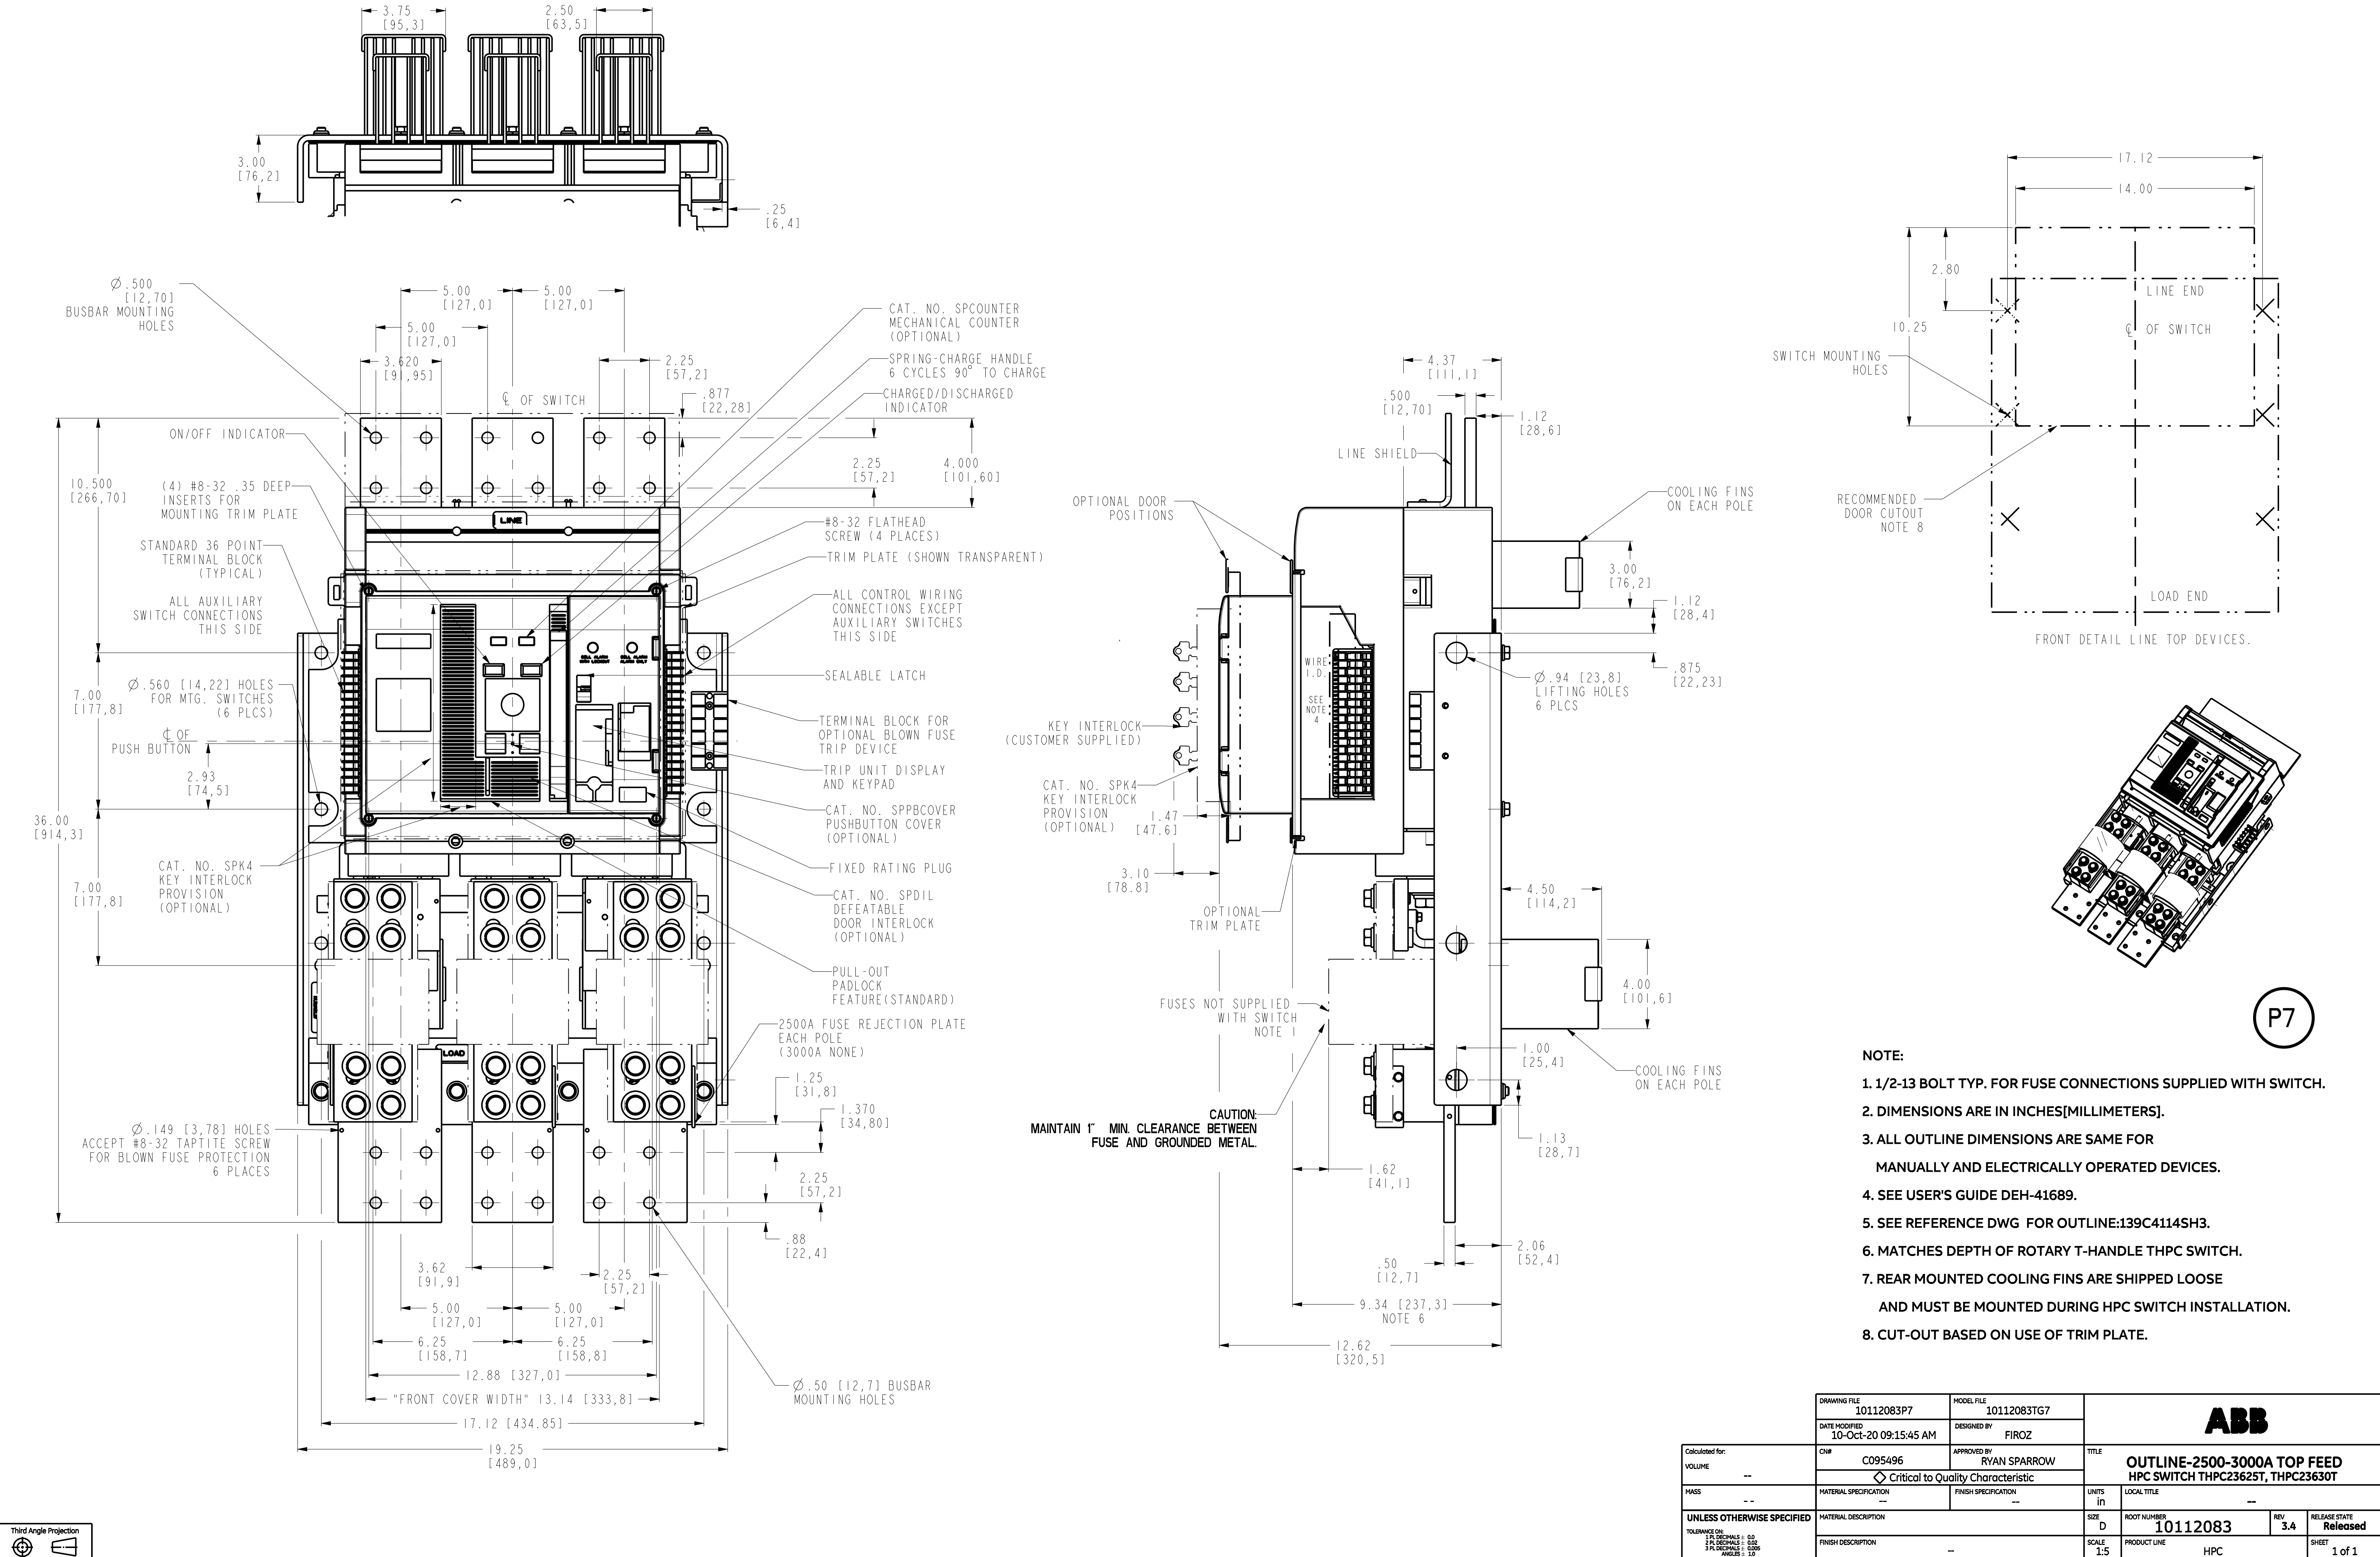

- NOTE:
- 1/2-13 BOLT TYP. FOR FUSE CONNECTIONS SUPPLIED WITH SWITCH.
 - DIMENSIONS ARE IN INCHES[MILLIMETERS].
 - ALL OUTLINE DIMENSIONS ARE SAME FOR MANUALLY AND ELECTRICALLY OPERATED DEVICES.
 - SEE USER'S GUIDE DEH-41689.
 - SEE REFERENCE DWG FOR OUTLINE:139C4114SH3.
 - MATCHES DEPTH OF ROTARY T-HANDLE THPC SWITCH.
 - REAR MOUNTED COOLING FINS ARE SHIPPED LOOSE AND MUST BE MOUNTED DURING HPC SWITCH INSTALLATION.
 - CUT-OUT BASED ON USE OF TRIM PLATE.

		DRAWING FILE 10112083P7	MODEL FILE 10112083TG7	ABB	
		DATE MODIFIED 10-Oct-20 09:15:45 AM	DESIGNED BY FIROZ		
Calculated for: VOLUME	--	CNR# C095496	APPROVED BY RYAN SPARROW	TITLE OUTLINE-2500-3000A TOP FEED HPC SWITCH THPC23625T, THPC23630T	
		⚡ Critical to Quality Characteristic			
MASS	--	MATERIAL SPECIFICATION	FINISH SPECIFICATION	UNITS in	LOCAL TITLE ---
UNLESS OTHERWISE SPECIFIED		MATERIAL DESCRIPTION		SIZE D	ROOT NUMBER 10112083
TOLERANCE ON: 1 ALL DIMENSIONS: ± .00 2 ALL DIMENSIONS: ± .002 3 ALL DIMENSIONS: ± .005 ANGLES: ± .01		FINISH DESCRIPTION		SCALE 1:5	REV 3.4
				PRODUCT LINE HPC	RELEASE STATE Released
				SHEET 1 of 1	