

DATA SHEET

ABB Ability™ Smart Sensor

Condition monitoring for motors



The ABB Ability™ Smart Sensor converts traditional motors into smart, wirelessly connected devices. It enables you to monitor the health of your motors, optimize efficiency and improve reliability and safety.

Intended use

- Industrial AC motors, induction or synchronous
- Continuous or intermittent duty
- Frame sizes
 - IEC: 56 - 500
 - NEMA: 42 - 449, non-standard motors equivalent to IEC 500
- Fixed speed or variable speed
- New or existing motors from ABB or other manufacturers

ABB Ability™ Smart Sensor gateway

Automatically collects data from a high number of Smart Sensors and transmits the data to the cloud for processing.

Gateway specifications

Range	Approx. 50 m (can vary in an industrial environment depending on facility layout)
Power supply	Power supply over ethernet port
Certifications	1879 FCC, CSA, CE
Radio frequency	ISM band, 2.402-2.480 GHz
Data transfer	WiFi, LAN 4G/LTE USB dongle
Environment	Operating temperature: -40 °C to +65 °C


Health parameters

- Overall condition
- Overall vibration (velocity rms)
- Bearing condition
- Misalignment
- Skin temperature (degrees)

Operating parameters

- Radial vibration (velocity rms)
- Tangential vibration (velocity rms)
- Axial vibration (velocity rms)
- Speed (rpm)
- Operating hours
- Number of starts
- Supply frequency (Hz)
- Output power (hp/kW)
- Regreasing count-down

SPECIFICATIONS	
Temperature measurement	
Measurement range	-40 °C to +85 °C
Resolution	0.05 °C
Accuracy (baseplate temperature)	+/-0.5 °C
Vibration measurement (overall velocity values)	
Amplitude range	0.04 - 700 mm/s (25 Hz)
Frequency range	10 Hz - 1 kHz
Wireless communication	
Network / radio standard	Bluetooth® 4.0 / IEEE 802.15.1
Frequency	2.4 GHz, license free ISM band
Range	With mobile phone: 1 - 10 m With gateway: approx. 50 m (can vary in an industrial environment depending on the facility layout)
Power	
Battery type (not replaceable)	3.0 V Lithium Permanganate (LI-MnO4) button cell CR2477N
Estimated battery lifetime	Batteries have a design life of 5 years. Expect 3 - 5 years depending on usage, settings and temperatures
Measured skin temperature (°C)	+40 °C +70 °C
Battery life in years, sensor in default configuration	approx. 5 approx. 3
Default configuration: Sensor measures once per hour and stores data to memory. Stored data must be collected at least monthly with a Bluetooth® mobile device or gateway.	
Environmental	
Temperature	Operation: -40 °C to +80 °C Storage: +10 °C to +25 °C
IP class	IP66 (dust-tight and resistant to powerful water jetting)
Vibration (of mounted surface)	<15 g at 100 Hz
Certifications	
CE, FCC, IC, RCM, EAC, UL, C-UL, SRE, SUBTEL	
Safe areas only; no hazardous area certification	
Physical	
Weight	0.26 kg
Case material	Stainless steel/Thermoplastic
Mounting	Centrally on motor frame, parallel to motor shaft; ensure good contact Ensure that correct mounting kit is used; ready-made mounting kits might not be available for all kinds of motors

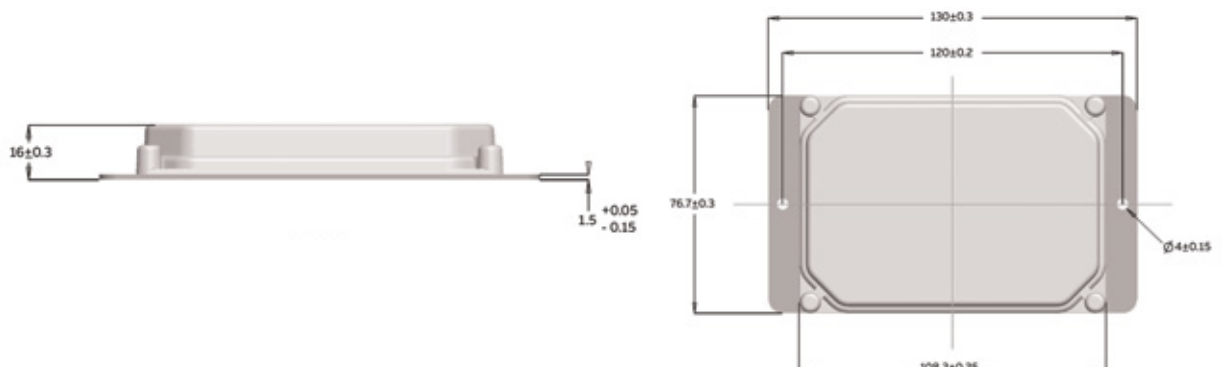

For more information please visit:
www.abb.com/smartsensor

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB Ltd does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB Ltd. Copyright © 2019 ABB
All rights reserved