


PRODUCT OVERVIEW

Enhanced 400–600A Spec-Setter™ safety switch

The safer, the better

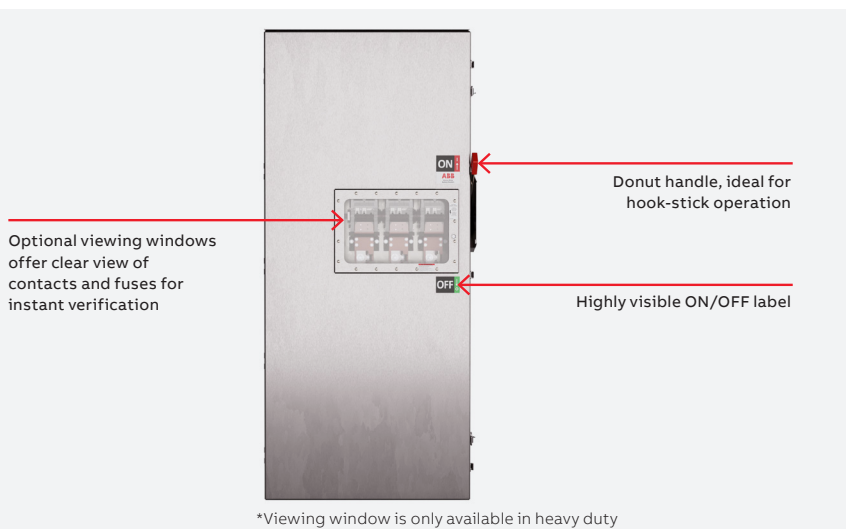


The new ABB 400–600A safety switch has premium features to improve safety and overall customer satisfaction.

Make the safer choice with Spec-Setter

The new 400–600A safety switch includes a wall-mounting bracket to make installation easier and safer. In addition, the clear line shield and neutral kit will be a standard offering. We are also pleased to announce that the viewing window option will be extended to this product offering.

The ordering code has changed — please reference the updated product structure on the following page.

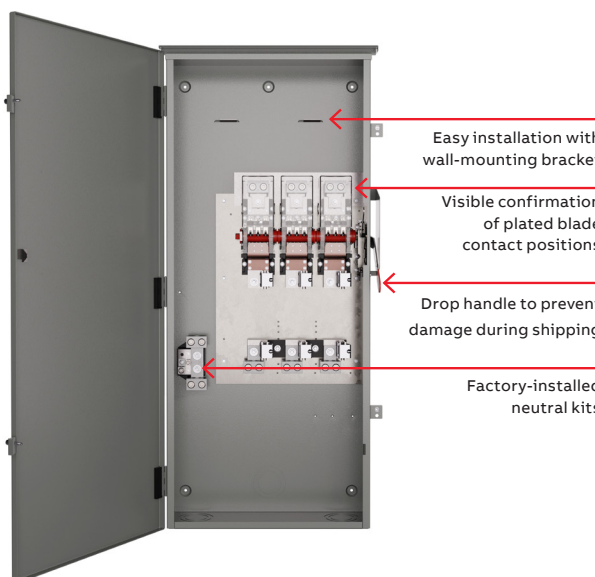

Save time and labor cost

- New wall-mounting bracket to decrease installation time
- Factory-installed neutral kits
- Red donut handle for easy grip



Easy protection

- UL Listed and cUL Listed (UL98 Enclosed Switches/CSA-C22.2 No. 4-04)
- NEMA enclosed safety switch standard KS1-2013
- Seismic certified



Helps prevent errors

- Extra large viewing window option available for 30–600A
- Clear line shields
- Wide gutter for easy wire pulling
- Plated blades




Flex across applications

- Cu/Al lugs rated 60/75 °C allow for greater wire selection
- Multiple enclosure options
- DC rated

Spec-Setter™ safety switches

Product number structure

400–600A

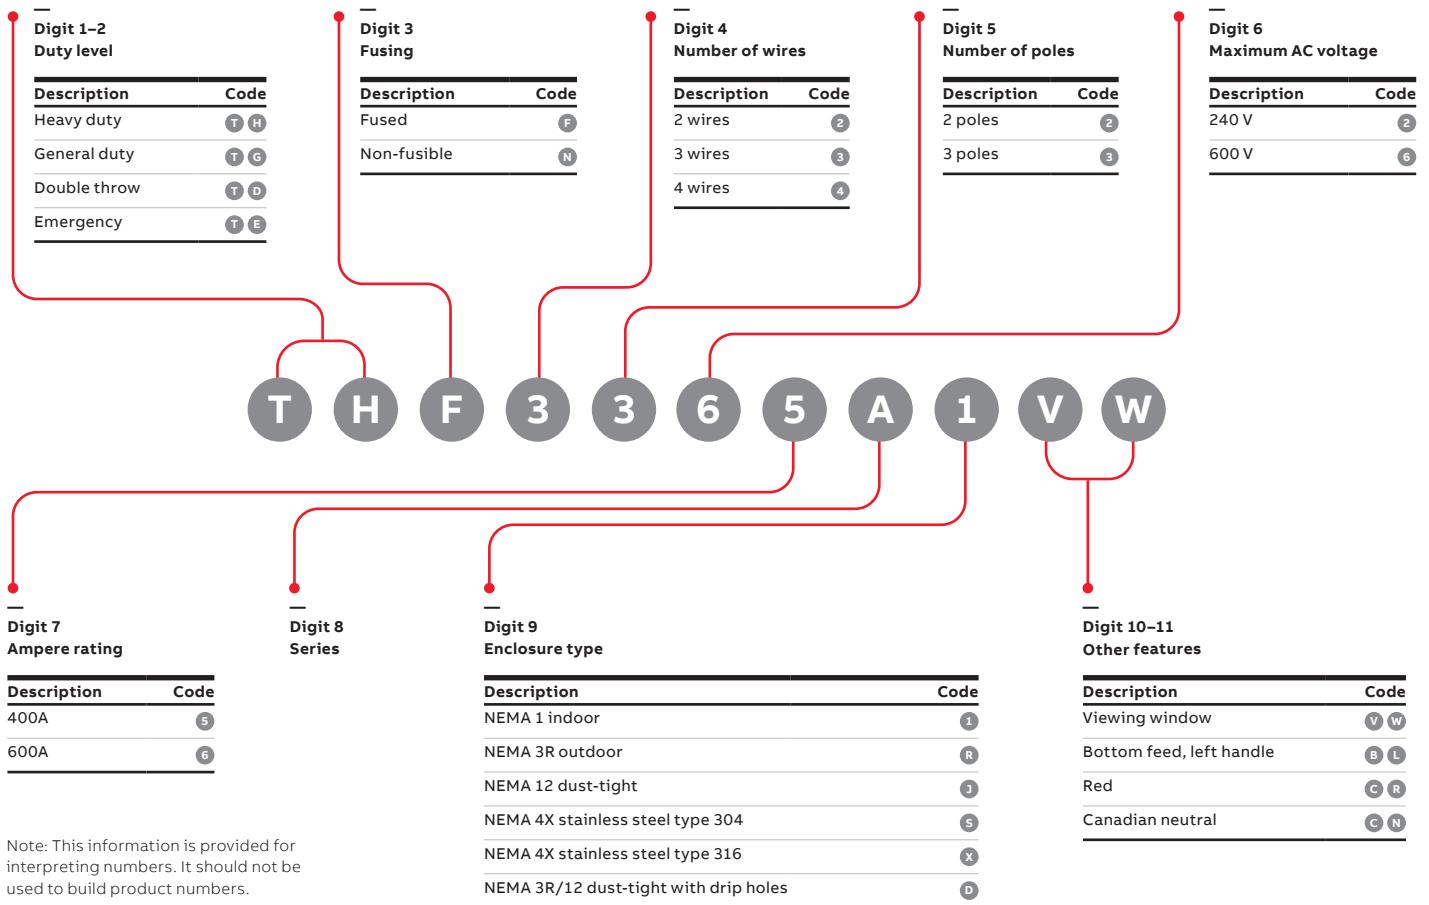

Applications for enclosures in non-hazardous locations

Provides a degree of protection against the following environmental conditions	Type of enclosure					
	1 ²	3R ²	4	4X	5	12
Incidental contact with enclosed equipment	X	X	X	X	X	X
Falling dirt	X	–	X	X	X	X
Falling liquids and light splashing	–	–	X	X	X	X
Windblown/circulating dust, lint, fibers and flyings ³	–	–	X	X	–	X
Settling airborne dust, lint, fibers and flyings ³	–	–	X	X	X	X
Rain, snow and sleet ⁴	–	X	X	X	–	–
Hosedown and splashing water	–	–	X	X	–	–
Oil and coolant	–	–	–	–	–	X
Corrosive agents	–	–	–	X	–	–

²These enclosures may be ventilated.

³These fibers and flyings are non-hazardous materials and are not considered Class III type ignitable fibers or combustible flyings. For Class III type ignitable fibers or combustible flyings, see the National Electrical Code, Article 500.

⁴External operating mechanisms are not required to be operable when the enclosure is ice covered.

ABB Inc.
800 Hymus Boulevard
Saint-Laurent, QC, Canada H4S 0B5
Tel.: +1 800 435-7365

Customer service / Technical Support:
ep.support@ca.abb.com

new.abb.com/ca/countonus

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB Inc. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB Inc. Copyright© 2023 ABB
All rights reserved