
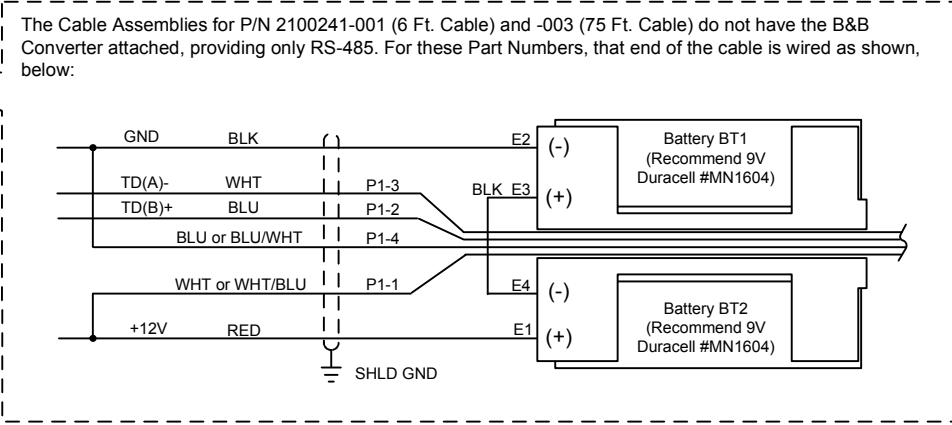
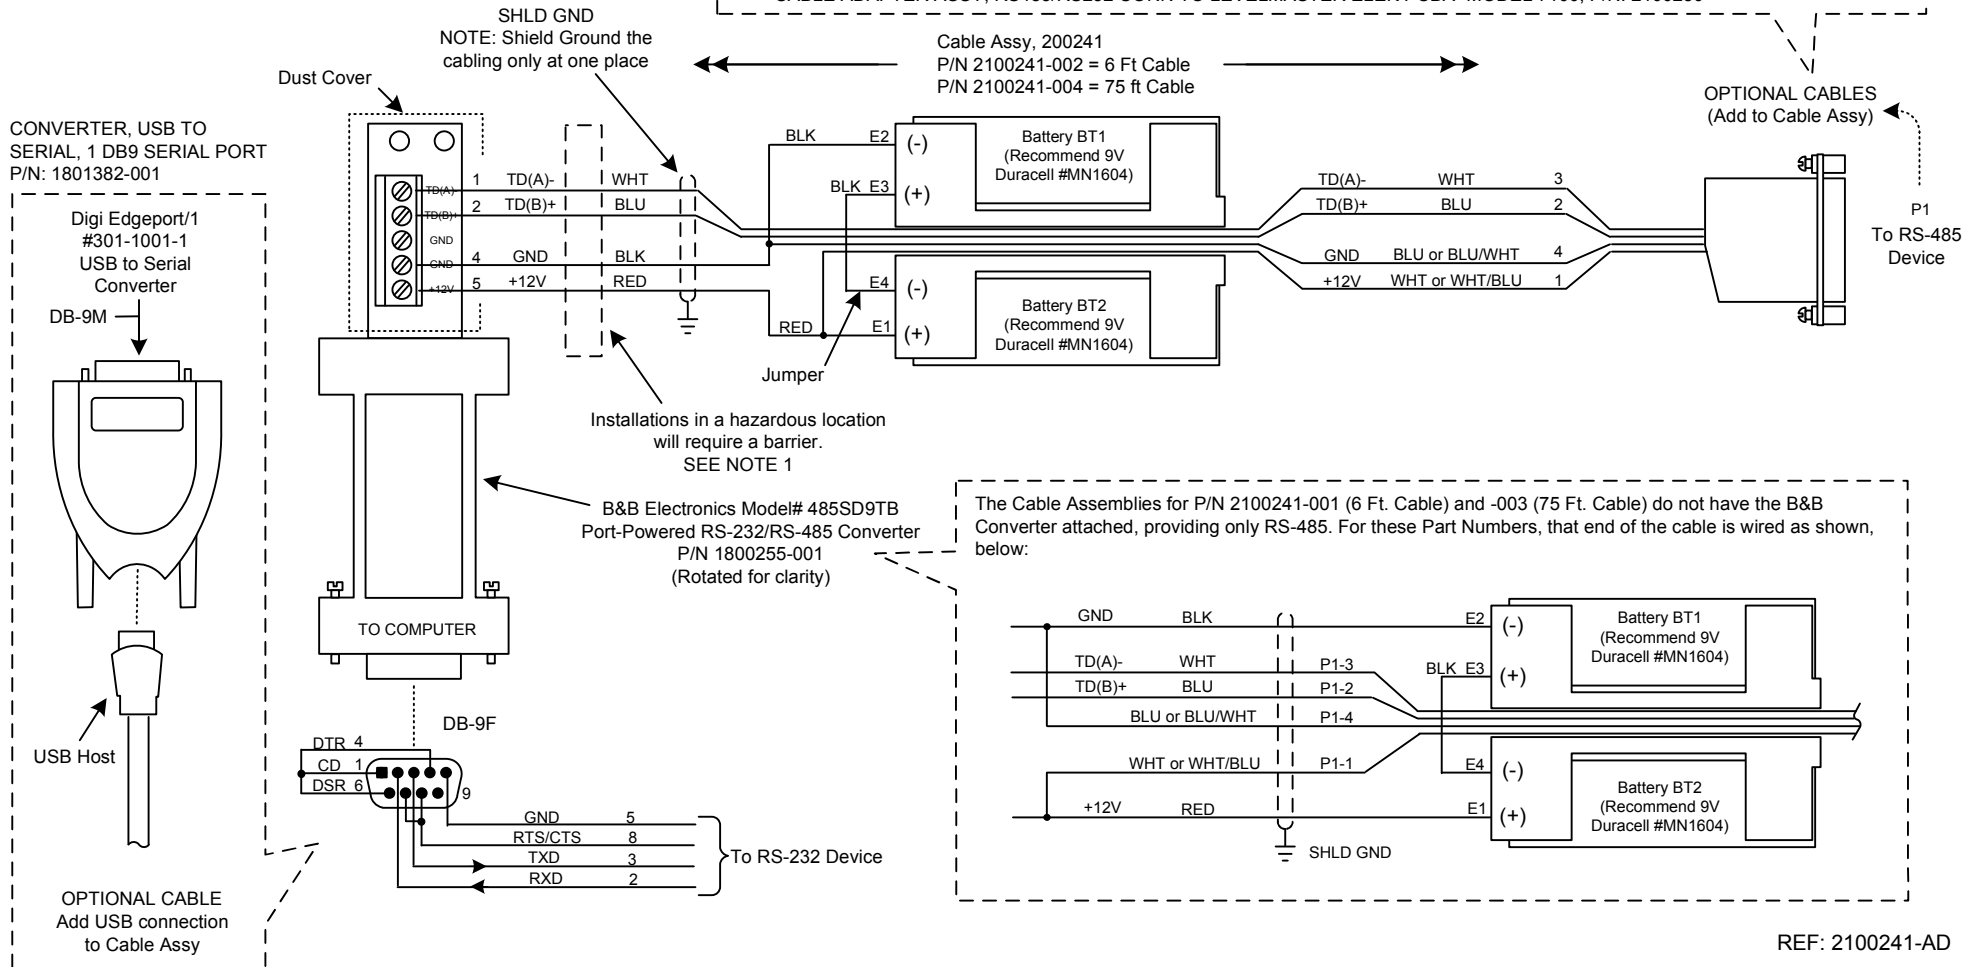


NOTES:

1. **WARNING:** This drawing does not illustrate completely the installation methods required for hazardous locations. Prior to any installation in a Classified Hazardous Location, verify installation methods by the ControlDrawing referenced on the product's name tag and national and local codes.
2. Will transmit up to 4000 Ft. @ 115.2k baud.
3. 35mA maximum current draw, when externally powered.
4. RS-485 conversion is 2-wire, half-duplex only. The Converter has an internal connection to prevent data from the RS-232 port from being echoed back to the port.
5. Optional cabling is sold separately, but shown here to demonstrate some of its uses in the LevelMaster environment.

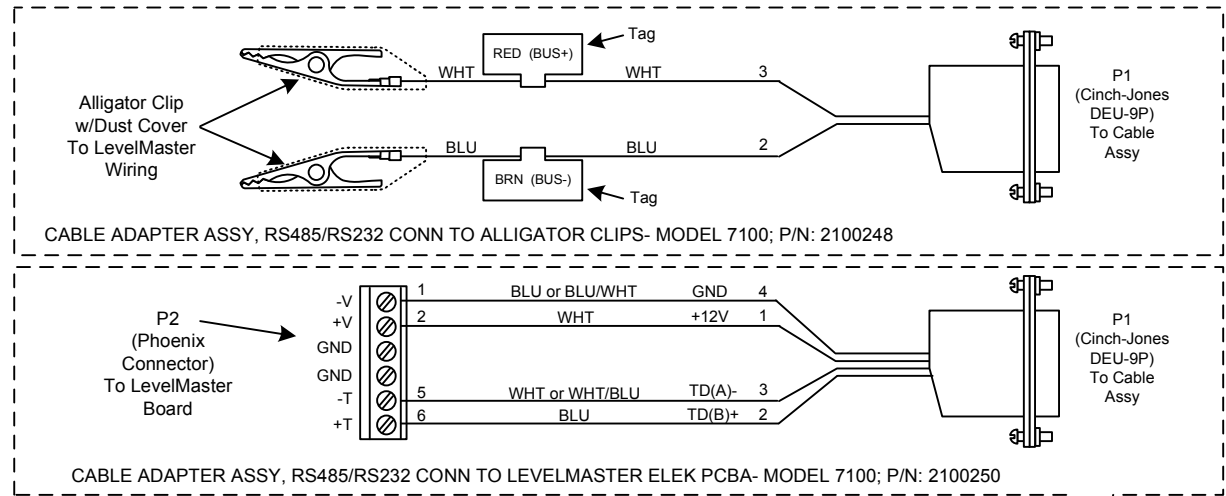

REF: 2100241-AD

	TOTALFLOW Products	ACTION	DOC TYPE	TITLE	DWG NO.	REV	SHEET
		L19081	UD	EXTERNAL POWER RS-485/232 CONVERTER CABLE ASSY W/ LEVELMASTER OPTIONS	2102912	AA	1 OF 1