


NOTES:

1. **WARNING:** This drawing does not illustrate completely the installation methods required for hazardous locations. Prior to any installation in a Classified Hazardous Location, verify installation methods by the Control Drawing referenced on the product's name tag and national and local codes.
2. All installations in hazardous locations must comply with requirements of Certification Drawing 2015246-CD.
3. For simplicity, this drawing differs slightly from the wiring interconnect in that power goes to P1-1 for Switched and Continuous. (See Note 4 below)

4. For Switched power or to enable Power Scheduler for UC12, remove the jumper between 1 & 9 on P1 of UC12.
5. Maximum length of RS485 bus is 4000 Ft. @9600 baud using Totalflow cable P/N 2011648-001 or equivalent.
6. Units must be daisy-chained; No Star Configurations.
7. Cable Shielding – Cable segments between units should have their shields terminated on one end only. The RS-485 Cable (P/N 2011648-001) has two shields, each with its own drain wire. When connecting multiple units together, connect the two drain wires on the first unit to one of the two ground screws on the bottom left-hand side of the enclosure. Cut the cable and terminate the wiring on the second unit but do not connect the drain wires. On the next segment between the second and third units, connect the two drain wires to the second unit but not to the third unit. Repeat this process until all units are wired.

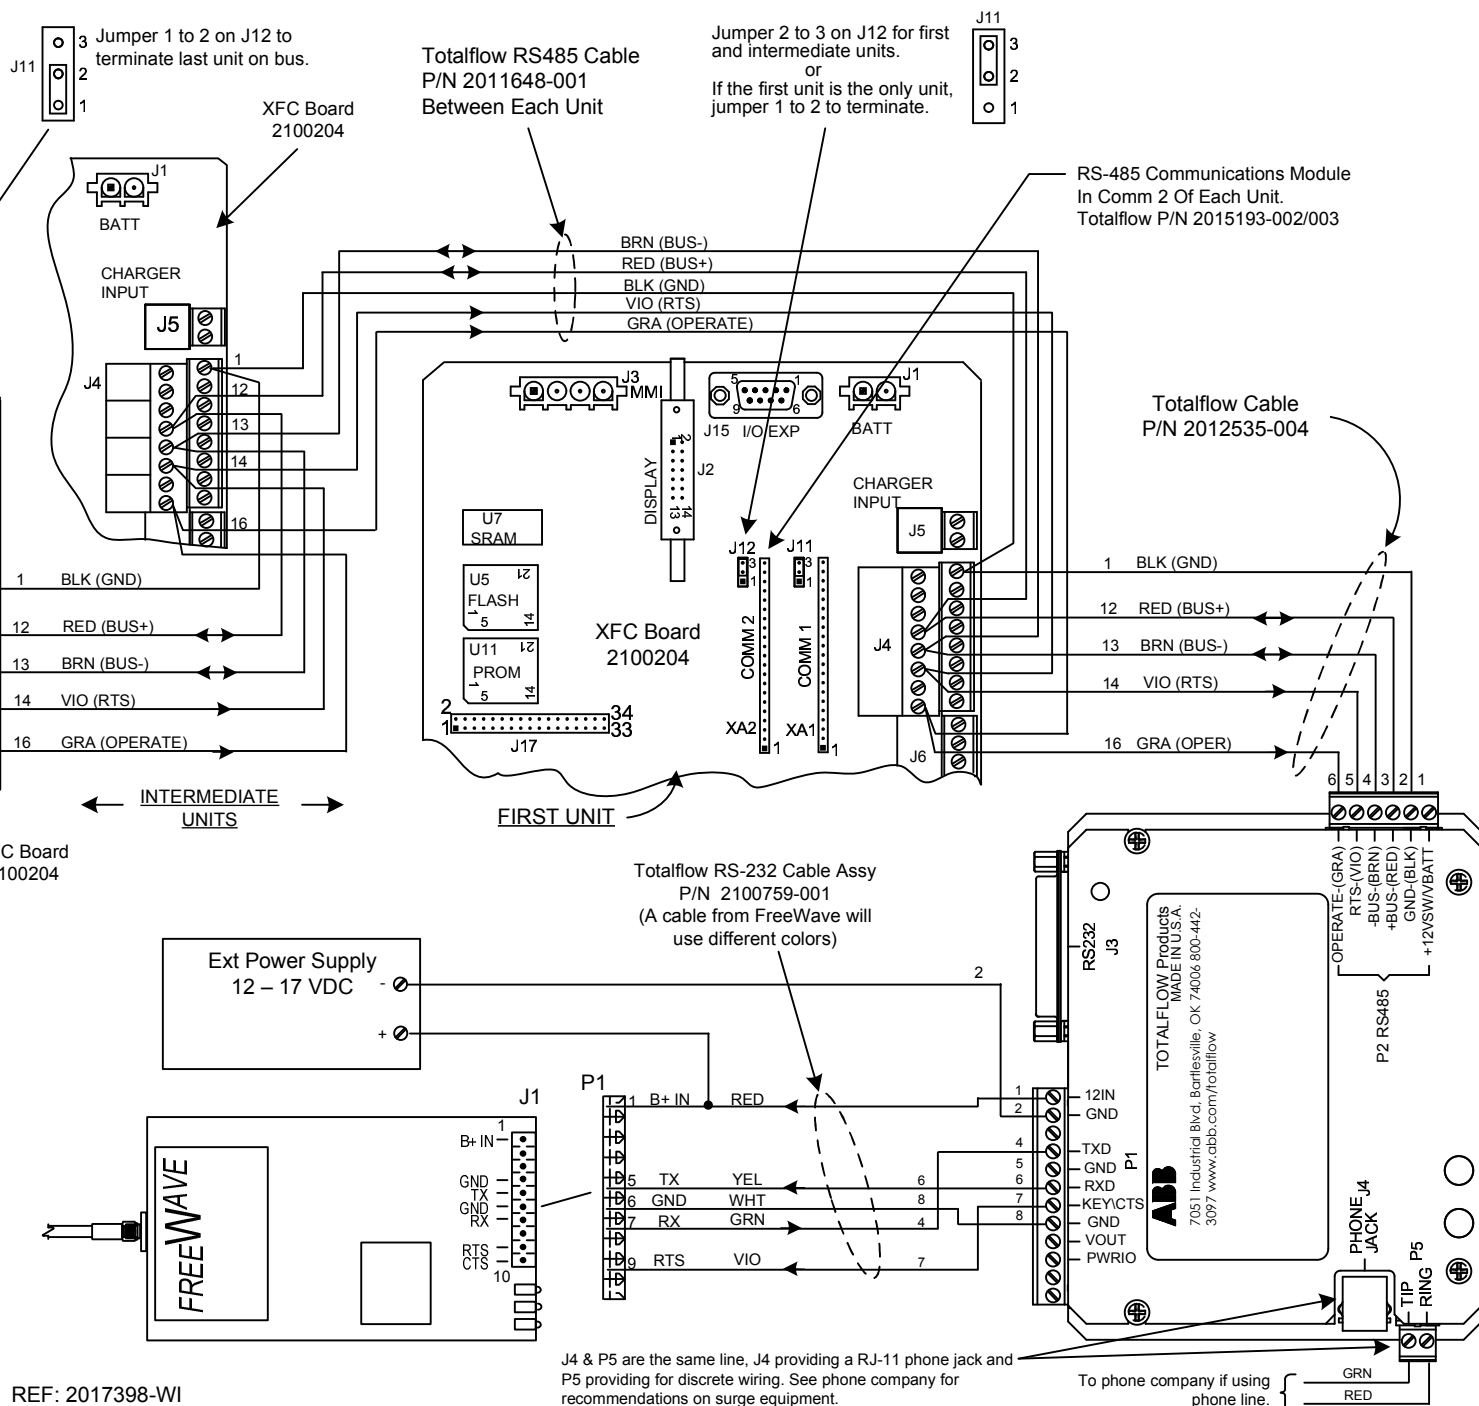

<div> <div>ABB</div> <div>TOTALFLOW Products</div> </div>	<div>ACTION</div> <div>L19726</div>
---	-------------------------------------