This document is issued by means of a computerized system. The digitally stored original is electronically approved. The approved document has a date entered in the 'Approved'-field. A manual signature is not required.

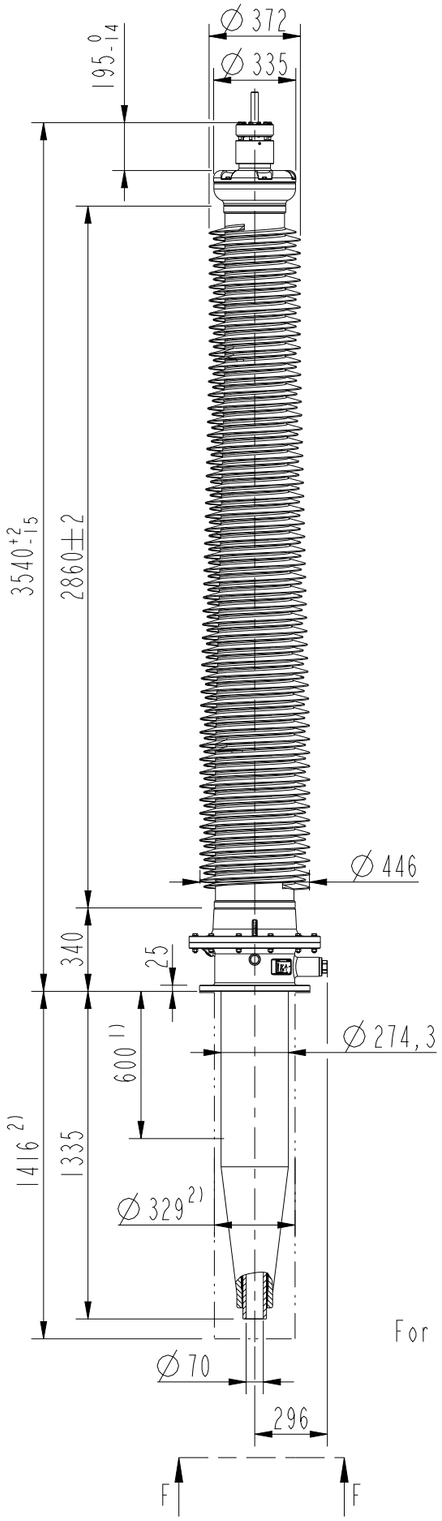

1) Maximum length of CT
2) Dimension of Protection Hood for transport and storage (delivered as standard).

Bushing Data:

Rated Voltage	362	kV
Phase-to-earth Voltage	220	kV
Dry Lightning Impulse 1,2/50µs	1175	kV
Wet Switching Impulse	950	kV
Wet Power Frequency AC	n.a.	kV
Routine test 1min dry 50Hz	561	kV
Rated Current	1600	A
Creepage Distance, nominal	12861	mm
Creepage Distance, minimum	12345	mm
Mass, Bushing	480	kg
Mass, incl. protective hood	512	kg

Ordering Data:

BUSHING

			AIR INSULATOR COLOUR/TYPE
1ZSC901362	-CAB	Test tap	Composite
1ZSC901362	-CBB	Voltage tap 6kV	Composite

OUTER TERMINAL	MATERIAL	D2 (mm)
1ZSC999001-AAA	Al	30
1ZSC999001-AAB	Al	60
1ZSC999001-AAC	Cu	30
1ZSC999001-AAD	Cu	40

DRAW ROD SYSTEM	
1ZSC999006	Lower draw rod
1ZSC999007	Upper draw rod

INNER TERMINAL	D3 (mm)
1ZSC999005-AAA	15
1ZSC999005-AAB	30
1ZSC999005-AAC	40
1ZSC999005-AAD	42

FIXED BOTTOM CONTACT
1ZSC999002-AAE

END SHIELD
1ZSC999003-AEA Epoxy insulated

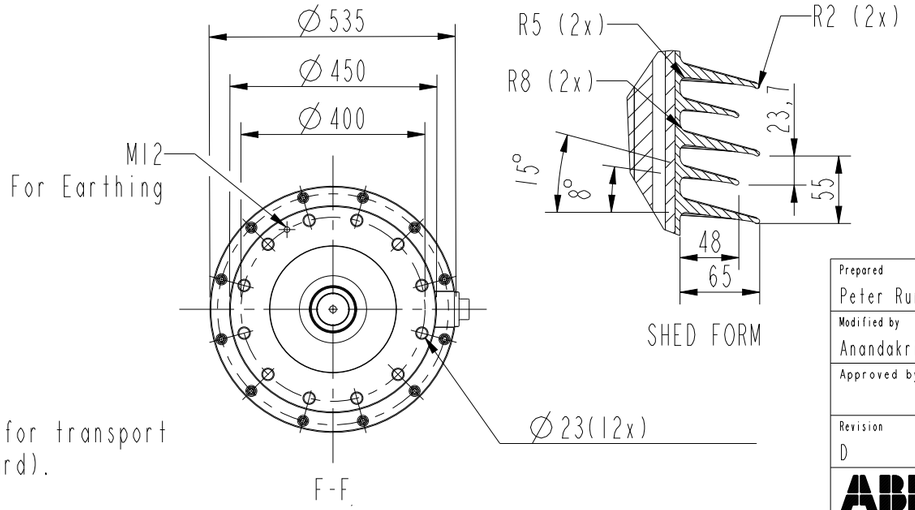

INNER TERMINAL

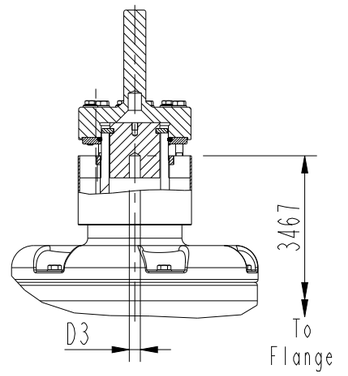

END SHIELD

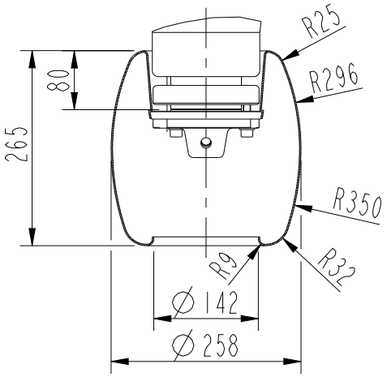

FIXED BOTTOM CONTACT



DRAW ROD SYSTEM / OUTER TERMINAL

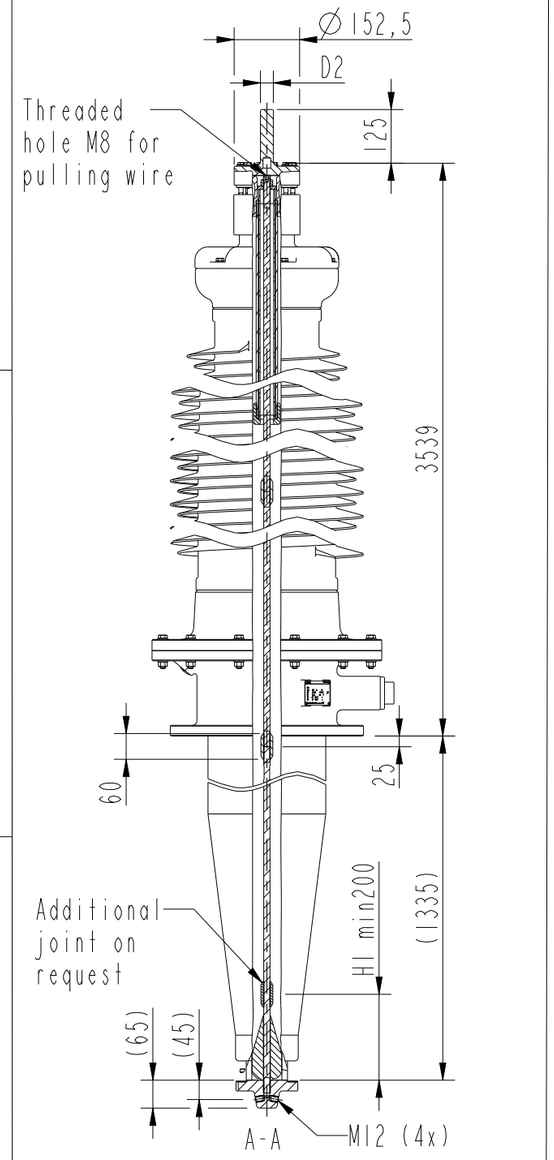

Prepared: Peter Runnholm	2013-12-06	Responsible department: PPCO/BK	Title: GSB 362/1600/0.6
Modified by: Anandakrishnan R	2013-12-18	Take over department	
Approved by		Used in product	Language: 82
Revision: D — Model and drawing updated.			Order / Sheet no.: 1
ABB		Document no.: 2751377-12	No. Shts.: (1)

The information contained in this document has to kept strictly confidential. Any unauthorized use, reproduction, distribution or disclosure to third parties are strictly forbidden. ABB reserves all rights regarding Intellectual Property Rights. © Copyright 2013 ABB. All rights reserved.