


We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden.
© ABB '19

On-load tap-changer type (V)UCGL./F, (V)UCLL./F, UCCL./F,
15 positions, linear switching.
Max. effective No. of turns in pos. 1.
The tap-changer is delivered set in pos. 8,
the preceding pos. was 7.

Lindningskopplare typ (V)UCGL./F, (V)UCLL./F, UCCL./F,
15 linjär koppling.
Max antal effektiva varv i läge 1.
Lindningskopplaren levereras inställd i läge 8,
föregående läge var 7.

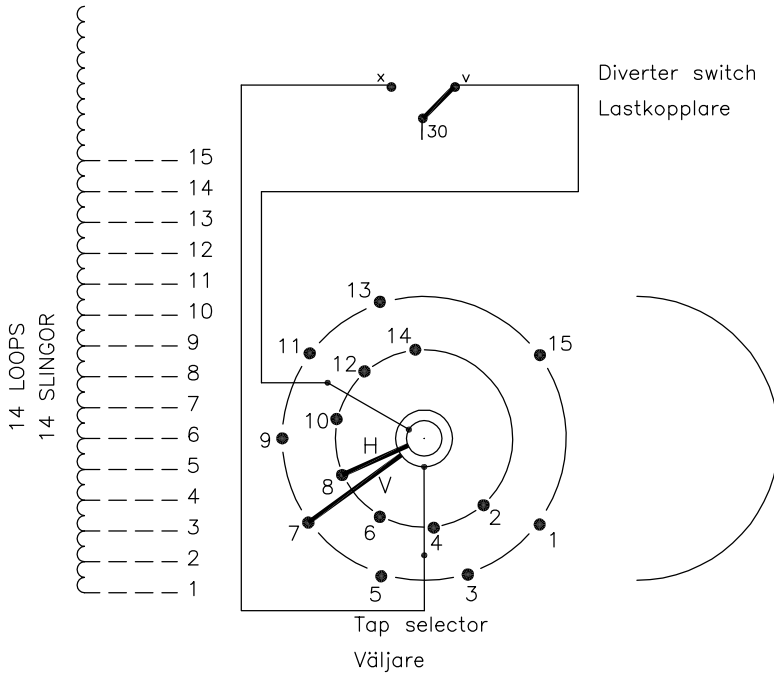

Pos. Läge	Tap selector and diverter switch connect	
1	1-V-x	30
2	2-H-v	
3	3-V-x	
4	4-H-v	
5	5-V-x	
6	6-H-v	
7	7-V-x	
8	8-H-v	
9	9-V-x	
10	10-H-v	
11	11-V-x	
12	12-H-v	
13	13-V-x	
14	14-H-v	
15	15-V-x	

The tap-changer is shown in pos. 8,
the preceding pos. was 7.
The tap selector is seen from above.
Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 8,
föregående läge var 7.
Väljaren sedd uppifrån.
Kontaktarm V ligger över kontaktarm H.

Continuous lines show leads included in the
tap-changer. Dashed lines show leads belonging
to the cleats and leads.

Heldragna linjer visar ledare som ingår i
lindningskopplaren. Streckade linjer visar
ledare som tillhör anslutningsdonet.

Sheet	Cont										
	Year	Week	Dept		Appd		Year		Week		
Drawn by	Form No.	RevInd		Accepted by qual control		Accepted for prod by		Description (English)		DATAORIGINAL	
		L.Oberg		M.Haggmar		CONNECTION DIAGRAM					
Design checked by		Design checked by		Drawn by		Description (own language)		File name			
		H.Sundberg		A.Wang		KOPPLINGSSHEMA		Lang		Sheet	
		Drawing checked by		Issued by Dept		Year		Week		Cont	
		N.Gustavsson		CO/TK		14		02		-	
		ABB								1ZSC004307-AAL	