


We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © ABB '19

On-load tap-changer type (V)UCGR./F, (V)UCLR./F, UCCR./F,
31 tap positions, plus/minus switching.
Min. effective No. of turns in pos. 1.
The tap-changer is delivered set in pos. 16,
the preceding pos. was 15.

Lindningskopplare typ (V)UCGR./F, (V)UCLR./F, UCCR./F,
31 lägen, plus/minus koppling.
Min antal effektiva varv i läge 1.
Lindningskopplaren levereras inställd i läge 16,
föregående läge var 15.

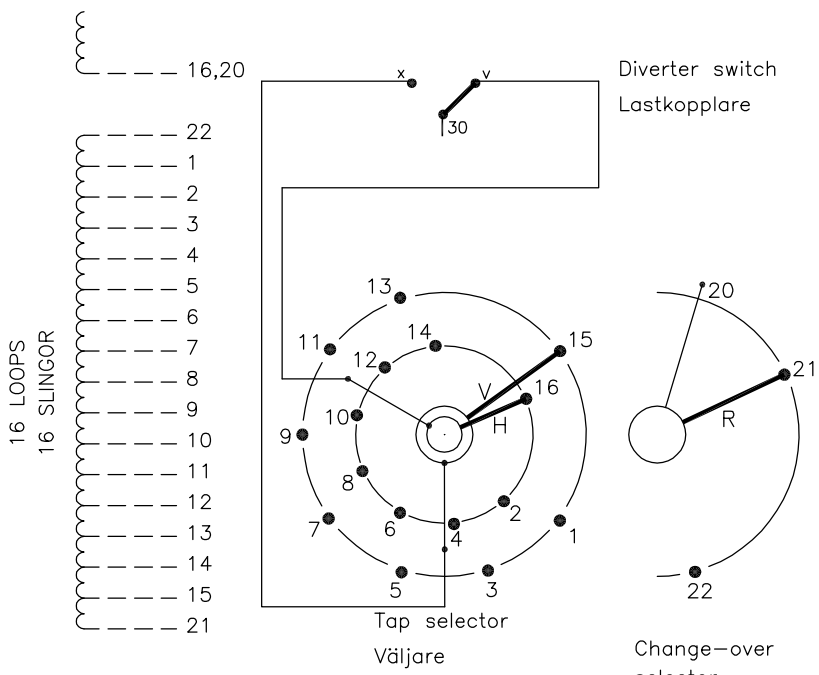

The tap-changer is shown in pos. 16,
the preceding pos. was 15.
The tap selector and the change-over selector
are seen from above.
Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 16,
föregående läge var 15.
Väljaren och plus/minus-omkopplaren sedda uppifrån.
Kontaktarm V ligger över kontaktarm H.

Continuous lines show leads included in the
tap-changer. Dashed lines show leads belonging
to the cleats and leads.

Heldragna linjer visar ledare som ingår i
lindningskopplaren. Streckade linjer visar
ledare som tillhör anslutningsdonet.

Pos. Läge	R connects in direction R förbinder i riktning	Tap selector and diverter switch connect Väljaren och lastkopplaren förbinder
1	↓	1-V-x
2		2-H-v
3		3-V-x
4		4-H-v
5		5-V-x
6		6-H-v
7		7-V-x
8		8-H-v
9		9-V-x
10		10-H-v
11		11-V-x
12		12-H-v
13		13-V-x
14		14-H-v
15		15-V-x
16	↓	16-H-v
17	↑	1-V-x
18		2-H-v
19		3-V-x
20		4-H-v
21		5-V-x
22		6-H-v
23		7-V-x
24		8-H-v
25		9-V-x
26		10-H-v
27		11-V-x
28		12-H-v
29		13-V-x
30		14-H-v
31		↓

Sheet	Cont				
Year	Week				
Dept					
Rev Ind	Revision	Appd	Year	Week	
Accepted by qual control	L.Oberg	Accepted for prod by	M.Haggmar	Description (English)	DATAORIGINAL
Design checked by	H.Sundberg	Drawn by	A.Wang	Description (own language)	KOPPLINGSSHEMA
Drawing checked by	N.Gustavsson	Issued by Dept	CO/TK	Year	14
		Week	02	1ZSC004310-AAM	
				Lang	Sheet
				Rev Ind	Cont
					-