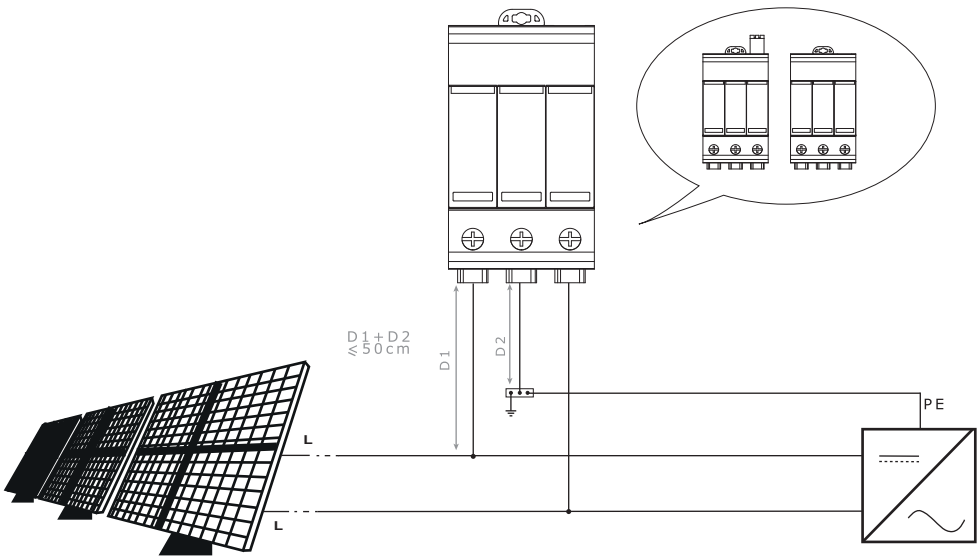


Not earthed/earthed PV systems

| | IPE | Iscpv | Thermal disconnector | | |
|---|---|---|---|---|---|
| **OVR PV T1-T2 5-1000 P QS** | AC: ⩽ 0.5mA DC: ⩽ 50µA | 11 kA | Yes *(Open circuit Failure Mode)* | EN 50539-11 Type 1 | UL 1449 4th Ed. Type 1 CA c UL us E322885 |
| **OVR PV T1-T2 5-1000 P TS QS** | | | | | |
| **OVR PV T1-T2 5-1500 P QS** | | | | | |
| **OVR PV T1-T2 5-1500 P TS QS** | | | | | |
| **OVR PV T1-T2 12.5-1000 P QS** | | | | | |
| **OVR PV T1-T2 12.5-1000 P TS QS** | | | | | |
| **OVR PV T1-T2 10-1500 P QS** | | | | | |
| **OVR PV T1-T2 10-1500 P TS QS** | | | | | |

(*) Suitable for use on a circuit capable of delivering not more than 11 000 rms symmetrical amperes

(*) Convient à des circuits produisant au plus 11 000A eff

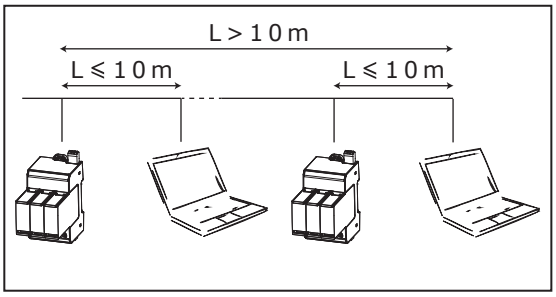







NEMA Type 1 Enclosure, Indoor Use Only
This device is a one port SPD.
This device features an internal protection that will disconnect the surge protective component but will maintain power to the load – now unprotected. If this situation is undesirable for the application, follow the manufacturer's instructions for replacing the device.

WARNING - Risk of Electric Shock
AVERTISSEMENT RISQUE DE CHOC – COUPER L'ALIMENTATION AVANT D'ENTREPRENDRE LE DÉPANNAGE

Attention ! Hazardous voltage ! Installation by person with electrotechnical expertise only




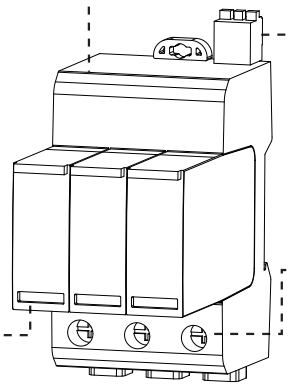







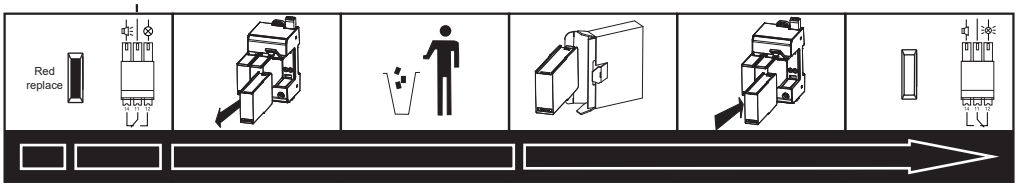


2CTB 8120__ R __ __

Parafoudre
Surge Protective Device
Uberspannungsableiter
Scaricatore di sovratensioni
Pararrayo
Protecção contra sobretensões
Skydd mot överspänningar
Защита от перенапряжений
电涌保护器

2CTC431032M1701



OVR PV T1-T2 5-1000 P TS QS
OVR PV T1-T2 5-1500 P TS QS
OVR PV T1-T2 12.5-1000 P TS QS
OVR PV T1-T2 10-1500 P TS QS



OVR PV T1-T2 5-1000 P QS
OVR PV T1-T2 5-1500 P QS
OVR PV T1-T2 12.5-1000 P QS
OVR PV T1-T2 10-1500 P QS



OVR PV T1-T2 5-1000 C QS
OVR PV T1-T2 5-1500 C QS
OVR PV T1-T2 12.5-1000 C QS
OVR PV T1-T2 12.5-1000 M C QS
OVR PV T1-T2 10-1500 C QS
OVR PV T1-T2 10-1500 M C QS

**ABB AG – STOTZ-KONTAKT**
**Eppelheimer Str. 82**
**DE-69123 Heidelberg**
**go.abb/contact**