




FACT SHEET

ReliaGear™ panelboard with branch circuit monitoring

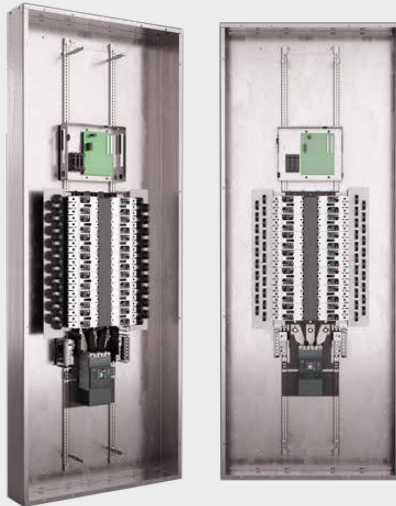

The Branch Circuit Monitoring (BCM) unit provides a cost-effective integrated solution for ReliaGear panelboard power monitoring and submetering applications.

—
Left: BCM solid core
Right: BCM split core

Overview

With exceptional performance, the BCM unit monitors key electrical parameters of the main circuit and various branch circuits coming into the panelboard. This information can be transmitted via the RS-485 communication system in order to analyze usage and identify potential cost saving measures and improve load management. Offering IEC Class 1 revenue grade metering accuracy, the revenue grade BCM meter can be used for tenant billing and cost allocation.

The ReliaGear panelboard comes with the BCM unit completely integrated, including current transformers, eliminating the need for any field installation or modifications. This integrated solution can help you meet the measurement and verification points required by the LEED and GREEN building design, and ASHRAE 90.1.

A split core branch circuit monitor is now available as another option to the standard solid core monitoring feature. The split core current transformers allow the operator to monitor only the circuits needed. The BCM unit can be factory integrated in any of the following ReliaGear panelboards up to 800 amperes: RQ, RE, or RS.

Benefits

- Analysis of potential cost saving actions
- Verify energy bills
- Identify wasteful practices and decrease unnecessary usage
- Fairly and accurately allocate energy costs to users
- User configurable alarm registers assist with load management
- Secure the optimum utility rate structure
- Load balancing for peak/off peak maximization
- Accurately decipher between load types where required by regulation

Features

- Solutions up to 800A
- IEC Class 1 revenue grade metering accuracy
- Offers solid core or split core BCM selection process
- Monitor up to 126 panelboards on a single RS-485 drop
- Reports volts, amps, power, and energy for each circuit
- Solid core monitors 42 or 84 circuits (and optional mains)
- Split core monitors up to 66 circuits in a main breaker panel and up to 84 circuits in a main lug panel
- 4 configurable alarm thresholds improve load management
- Ability to set the orientation and numbering of the circuits
- 1/4 to 125¹ Amp monitoring – the widest range available
- 1-, 2-, 3-pole breaker support
- 5-year warranty
- Modbus® RTU via RS485 communications
- New depopulated BCM panel comes with provisioning for meter to be installed later in the field

Applications

- California Title 24 Building Code compliant
- ASHRAE 90.1 compliant²
- Energy monitoring in building automation systems
- Renewable energy
- Energy management
- Commercial submetering
- Industrial monitoring
- Cost allocation

BCM technical specifications

Inputs

Input power	50/60 Hz, 90-277 VAC
-------------	----------------------

Accuracy

Power/Energy	IEC 62053-21 Class 1, ANSI C12.1-2008
Voltage	±0.5% of reading 90-277V line-to-neutral

Outputs

Type	Modbus RTU
Connection DIP	Switch-selectable 2-wire or 4-wire, RS-485
Address DIP	Switch-selectable address 1 to 247 (in pairs of 2)
Baud rate DIP	Switch-selectable 9600, 19200, 38400
Parity DIP	Switch-selectable NONE, ODD, EVEN
Communication format	8-data-bits, 1-start-bit, 1-stop, bit
Termination	5-position depluggable connector (TX+ TX- SHIELD TX+/RX+ TX-/RX-)

Mechanical

Ribbon cable support	18" round ribbon cable standard; up to 20 ft. (6 m) available
----------------------	---

Environmental

Operating temperature range	0° to 60°C (32° to 140°F) (<95% RH noncondensing)
Storage temperature range	-40° to 70°C (-40° to 158°F)
Agency approvals	UL508, EN61010

¹ Must use split core BCM for 110A and 125A monitoring. Solid core available for 42 or 84 circuits only, 100A max. Solid core CTs have an inner diameter of 0.4". Check wire diameter for compatibility. Split core available up to 84 circuits max. and up to 125A max.

² Recording and data retention requirements satisfied by connection to an energy monitoring system.

Selection guide for ASP meter split and solid core

Monitoring at mains	Advanced	Basic
Current per phase	•	•
Max. current per phase	•	•
Current demand per phase	•	•
Max. current demand per phase	•	•
Energy (kWh) per phase	•	
Real power (kW) per phase	•	
Apparent power (kVA)	•	
Power factor total ³	•	
Power factor per phase	•	
Voltage – line to line and average	•	
Voltage – line to neutral and average	•	
Frequency (Phase A)	•	

Monitoring at branch circuit	42 or 84 circuit solid core 66/84 circuit split core max.	42 or 84 circuit solid core 66/84 circuit split core max.
Current	•	•
Max. current	•	•
Current demand	•	•
Max. current demand	•	•
Real power (kW)	•	
Real power (kW) demand	•	
Real power (kW) demand max.	•	
Energy (kWh) per circuit	•	
Apparent power (kVA)	•	
Power factor	•	

³ Based on a 3-phase breaker rotation

References

Solid core installation guide	1TQC173000E0050
Commissioning guide	1TQC173000E0010
Split core installation guide	1TQC173000E0012

Standards and approvals

- UL-67
- UL-50
- NEMA PB-1
- NFPA-70

ABB Inc.
305 Gregson Drive
Cary, NC 27511
United States

electrification.us.abb.com

**GE is a trademark of GE.
Manufactured by ABB Inc. under license
from General Electric Company.**

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB Inc. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB Inc. © 2022 ABB
All rights reserved

ReliaGear is a trademark of ABB Inc.