


On-load tap-changer type (V)UCGD./F, (V)UCLD./F, UCCD./F,  
 15 tap positions, coarse/fine switching.  
 Max. effective No. of turns in pos. 1.  
 The tap-changer is delivered set in pos. 8,  
 the preceding pos. was 7.

Lindningskopplare typ (V)UCGD./F, (V)UCLD./F, UCCD./F,  
 15 lägen, grov/fin koppling.  
 Max antal effektiva varv i läge 1.  
 Lindningskopplaren levereras inställd i läge 8,  
 föregående läge var 7.

Pos. Läge	R connects in direction R förbinder i riktning	Tap selector and diverter switch connect  Väljaren och lastkopplaren förbinder
1		1-V-x
2		2-H-v
3		3-V-x
4	20-21	4-H-v
5		5-V-x
6		6-H-v
7		7-V-x
8	20-21	8-H-v
9		9-V-x
10		10-H-v
11		11-V-x
12	20-22	12-H-v
13		13-V-x
14		14-H-v
15		15-V-x

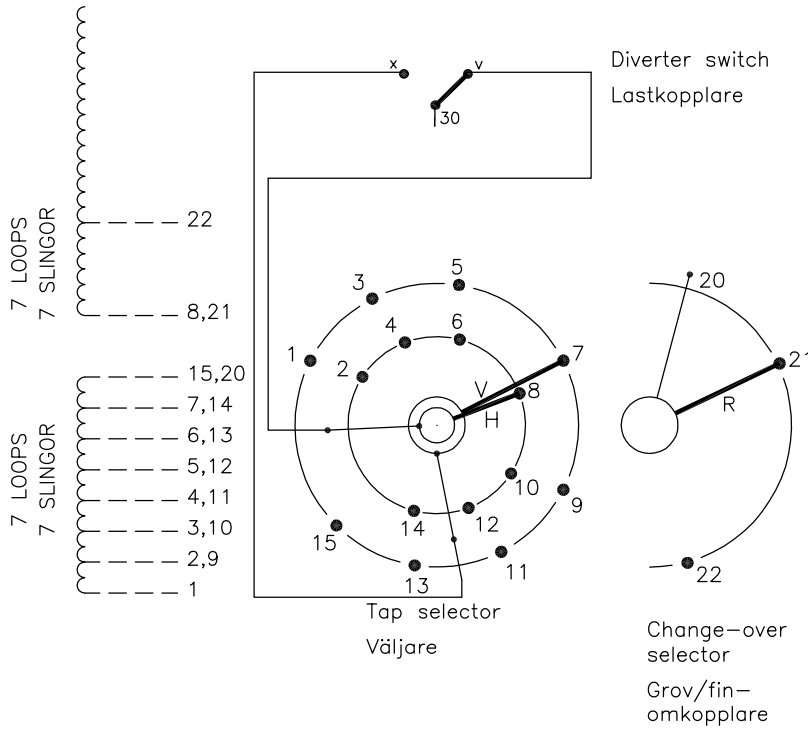

The tap-changer is shown in pos. 8,  
 the preceding pos. was 7.  
 The tap selector and the change-over selector  
 are seen from above.  
 Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 8,  
 föregående läge var 7.  
 Väljaren och grov/fin-omkopplaren sedda uppifrån.  
 Kontaktarm V ligger över kontaktarm H.

Continuous lines show leads included in the  
 tap-changer. Dashed lines show leads belonging  
 to the cleats and leads.

Heldragna linjer visar ledare som ingår i  
 lindningskopplaren. Streckade linjer visar  
 ledare som tillhör anslutningsdonet.

We reserve all rights in this document and in the  
 information contained therein. Reproduction, use or  
 disclosure to third parties without express authority  
 is strictly forbidden. © ABB '19

Sheet	Cont	Year	Week	Dept	Rev Ind	Revision	Appd	Year	Week	Description (English)	DATAORIGINAL
Form No.	Design checked by				Accepted by qual control	Accepted for prod by				Description (own language)	File name
	H.Sundberg				L.Oberg	M.Haggmar				KOPPLINGSSHEMA	Lang
	N.Gustavsson	Issued by Dept	Year	Week							Sheet
		CO/TK	14	02							1
	<b>ABB</b>									1ZSC004311-AAD	Rev Ind
											Cont
											-