

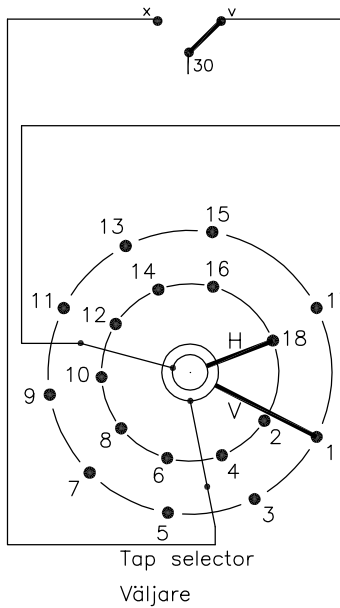
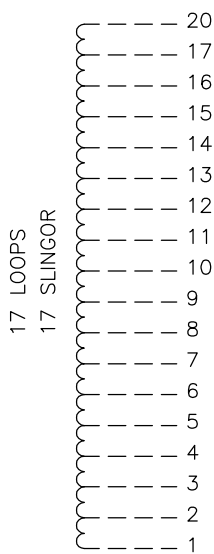


On-load tap-changer type (V)UCGD./F, (V)UCLD./F, UCCD/F,
 35 tap positions, coarse/fine switching.
 Min. effective No. of turns in pos. 1.
 The tap-changer is delivered set in pos. 18,
 the preceding pos. was 17.

Lindningskopplare typ (V)UCGD./F, (V)UCLD./F, UCCD/F,
 35 lägen, grov/fin koppling.
 Min antal effektiva varv i läge 1.
 Lindningskopplaren levereras inställd i läge 18,
 föregående läge var 17.



Diverter switch
 Lastkopplare

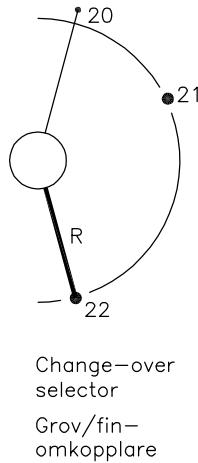

The tap-changer is shown in pos. 18,
 the preceding pos. was 17.
 The tap selector and the change-over selector
 are seen from above.
 Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 18,
 föregående läge var 17.
 Väljaren och grov/fin-omkopplaren sedda uppifrån.
 Kontaktarm V ligger över kontaktarm H.

Continuous lines show leads included in the
 tap-changer. Dashed lines show leads belonging
 to the cleats and leads.

Heldragna linjer visar ledare som ingår i
 lindningskopplaren. Streckade linjer visar
 ledare som tillhör anslutningsdonet.

| Pos. Läge | R connects in direction R förbinder i riktning | Tap selector and diverter switch connect Väljaren och lastkopplaren förbinder |
|--------------|---|--|
| 1 | | 17-V-x |
| 2 | | 16-H-v |
| 3 | | 15-V-x |
| 4 | | 14-H-v |
| 5 | | 13-V-x |
| 6 | | 12-H-v |
| 7 | | 11-V-x |
| 8 | | 10-H-v |
| 9 | 20-22 | 9-V-x |
| 10 | | 8-H-v |
| 11 | | 7-V-x |
| 12 | | 6-H-v |
| 13 | | 5-V-x |
| 14 | | 4-H-v |
| 15 | | 3-V-x |
| 16 | | 2-H-v |
| 17 | | 1-V-x |
| 18 | 20-22 | 18-H-v |
| 19 | | 17-V-x |
| 20 | | 16-H-v |
| 21 | | 15-V-x |
| 22 | | 14-H-v |
| 23 | | 13-V-x |
| 24 | | 12-H-v |
| 25 | | 11-V-x |
| 26 | | 10-H-v |
| 27 | 20-21 | 9-V-x |
| 28 | | 8-H-v |
| 29 | | 7-V-x |
| 30 | | 6-H-v |
| 31 | | 5-V-x |
| 32 | | 4-H-v |
| 33 | | 3-V-x |
| 34 | | 2-H-v |
| 35 | | 1-V-x |

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © ABB '19

| | | | | |
|---------------------------------|-------------------------------------|-----------------------------------|--|------|
| Sheet | Cont | Year | | Week |
| Rev Ind | Revision | Appd | Year | Week |
| Rev Ind | Accepted by qual control L.Oberg | Accepted for prod by M.Haggmar | Description (English) CONNECTION DIAGRAM | |
| Design checked by H.Sundberg | Design checked by N.Gustavsson | Drawn by A.Wang | Description (own language) KOPPLINGSSHEMA | |
| Issued by Dept CO/TK | Year 14 | Week 02 | File name | |
| | | | 1ZSC004312-AAP | |
| Lang | Sheet | Rev Ind | Cont | |
| | 1 | - | - | |