


Messaging module CP-C MM

Accessory for CP-C range power supplies

Data sheet

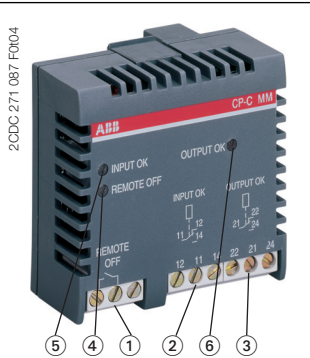

- ① REMOTE OFF: terminals - remote off
- ② INPUT OK 11-12/14: terminals - message supply voltage OK
- ③ OUTPUT OK 21-22/24: terminals - message output voltage OK
- ④ REMOTE OFF: green LED - remote off
- ⑤ INPUT OK: green LED - supply voltage OK
- ⑥ OUTPUT OK: green LED - output voltage OK

Features

- Pluggable onto CP-C range primary switch mode power supplies
- REMOTE-OFF input to switch off the power supply unit remotely
- Monitoring of the input voltage of the power supply unit and messaging if below the limit value
- Monitoring of the output voltage of the power supply unit and messaging if below the limit value
- Output voltage monitoring is only in case of decoupled parallel operation possible

Approvals

GOST

Marks

CE
 C-Tick

Order data

Type	Description	Order code
CP-C MM	Messaging module The CP-C MM indicates the correct function of the power supply unit via LEDs and energized output relay.	1SVR 427 081 R0000

Application

The messaging module CP-C MM monitors the input and output voltage of a CP-C range primary switch mode power supply.

Operating mode

Indication of the correct function of the power supply with CP-C MM

The messaging module CP-C MM can be plugged onto a CP-C range primary switch mode power supply. It indicates the correct function of the power supply unit via LEDs and energized output relay. The power supply unit can be switched off by closing of a volt-free (dry/floating) contact at the "REMOTE OFF" input.

If the supply voltage at the input of the power supply falls below 82 V AC (70 V DC), the output relay "INPUT OK" (contacts 11-12/14) de-energizes and the LED "INPUT OK" turns off.


If the output voltage of the power supply falls below 19.8 V DC, the output relay "OUTPUT OK" (contacts 21-22/24) de-energizes and the LED "OUTPUT OK" turns off.

Output voltage monitoring is only possible in decoupled parallel operation.

Installation

Mounting

The module is plugged and fixed as shown in the accompanying picture onto the front side of a CP-C power supply. Doing so, the pre-cut front foil of the power supply unit is penetrated by the latching hooks and the plug contacts. The module must not be plugged in when the power is on.

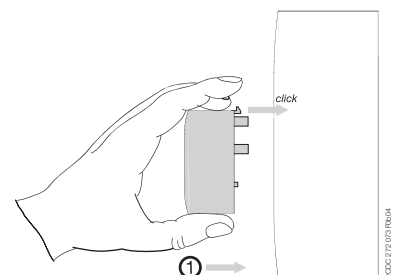

Messaging module CP-C MM


Accessory for CP-C range power supplies

Data sheet

Installation

Demounting

The module is removed as shown in the accompanying picture.
The module must not be removed when the power is on.

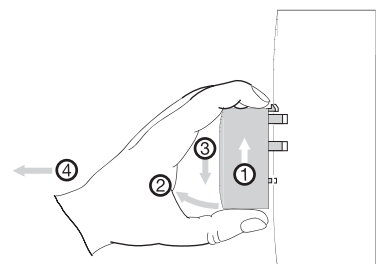

Electrical connection

REMOTE OFF

If the terminals are short-circuited ($R \leq 1 \text{ k}\Omega$) e.g. via a n/o contact, the power supply unit is switched off remotely.

If the resistance R between the terminals is $\geq 10 \text{ k}\Omega$, the power supply unit is switched on.

Attention! Terminal potential = input voltage

INPUT OK

Volt-free (dry/floating) change-over contact - closed-circuit principle

11-14 closed and 11-12 open, if the input voltage of the power supply unit is $> 85 \text{ V AC} / 90 \text{ V DC}$.

11-12 closed and 11-14 open, if the input voltage of the power supply unit is $< 82 \text{ V AC} / 70 \text{ V DC}$.

11-14 also closed, if REMOTE OFF.


OUTPUT OK

Volt-free (dry/floating) change-over contact - closed-circuit principle

21-24 closed and 21-22 open, if the output voltage of the power supply unit is $> 20.2 \text{ V DC}$.

21-22 closed and 21-24 open, if the output voltage of the power supply unit is $< 19.8 \text{ V DC}$.

Connection diagram(s)



INPUT OK

11-12/14

OUTPUT OK

21-22/24


REMOTE OFF

Message supply voltage OK

Message output voltage OK

Remote off of power supply

Wiring instructions



Messaging module CP-C MM

Accessory for CP-C range power supplies

Data sheet

Technical data

Data at $T_a = 25\text{ °C}$, $U_{in} = 230\text{ V AC}$ and rated values, unless otherwise indicated

Input circuits - Supply circuits		1SVR 427 081 R0000
Rated input voltage U_{in}		powered by the output circuit of the power supply
Typical current / power consumption		- / 2.5 VA
		- / 1.5 W
Input voltage range	AC	70-264 V AC
	DC	80-350 V DC
Input circuits - Control circuit		1SVR 427 081 R0000
Kind of triggering		volt-free triggering
Control input, control function	REMOTE OFF	Remote off
Threshold value for switching off		$R \leq 1\text{ k}\Omega$
Threshold value for switching on		$R \geq 10\text{ k}\Omega$
Input current		typ. 1 mA (200 mA for 200 μ s)
Maximum cable length to the control input		25 m - 100 pF/m
Measuring circuit - Input		1SVR 427 081 R0000
Monitoring function		undervoltage monitoring
Threshold value(s)		85 V AC / 90 V DC
Hysteresis related to the threshold value		AC: typ. -8 % / DC: -30 %
Accuracy / Tolerance		-5 % (at AC and DC)
Maximum measuring cycle		typ. < 50 ms
Measuring circuit - Output		1SVR 427 081 R0000
Monitoring function		undervoltage monitoring
Threshold value(s)		20 V DC
Hysteresis related to the threshold value		typ. 5 %
Accuracy / Tolerance		$\pm 1\text{ %}$
Maximum measuring cycle		typ. < 10 ms
Indication of operational states		1SVR 427 081 R0000
Remote off	REMOTE OFF: green LED	 : "REMOTE OFF" input $\leq 1\text{ k}\Omega$
Supply voltage	INPUT OK: green LED	 : supply voltage OK
Output voltage	OUTPUT OK: green LED	 : output voltage OK
Output circuits		1SVR 427 081 R0000
Kind of output	11-12/14	relay, 1 c/o contact
	21-22/24	relay, 1 c/o contact
Contact material		AgNi
Rated output voltage (IEC/EN 60947-1, VDE 0110)		250 V
Operational principle		closed-circuit principle
Minimum switching voltage / Minimum switching current		24 V / 10 mA
Maximum switching voltage / Maximum switching current		250 V / 1 A

Messaging module CP-C MM

Accessory for CP-C range power supplies

Data sheet

Output circuits		1SVR 427 081 R0000
Rated operational current I_g (IEC/EN 60947-1)	AC12 (resistive) at 230 V	1 A
	AC15 (inductive) at 230 V	1 A
	DC12 (resistive) at 24 V	1 A
	DC13 (inductive) at 24 V	1 A
Mechanical lifetime		30 x 10 ⁶ switching cycles
Electrical Lifetime		0.1 x 10 ⁶ switching cycles
Maximum fuse rating in order to achieve short-circuit protection	n/o contact	2 A, gL
	n/c contact	2 A, gL
General data		1SVR 427 081 R0000
Duty time		100 %
Dimensions (W x H x D) when mounted		56.5 x 54 x 24 mm (2.22 x 2.13 x 0.94 inches)
Material of enclosure		plastic
Weight		0.065 kg (0.14 lb)
Mounting position		plugged onto power supply unit
Mounting		snap-on mounting without any tool
Degree of protection	enclosure / terminals	IP20 / IP20
Class of protection (EN 61140)		II
Electrical connection		1SVR 427 081 R0000
all circuits		
Wire size	fine-strand with wire end ferrule	0.2-2.5 mm ² (24-14 AWG)
	fine-strand without wire end ferrule	0.2-2.5 mm ² (24-14 AWG)
	rigid	0.2-4 mm ² (24-12 AWG)
Stripping length		7.5 mm (0.3 inches)
Tightening torque		0.4-0.6 Nm
Environmental data		1SVR 427 081 R0000
Ambient temperature range	operation	-25...+70 °C
	storage	-40...+85 °C
Damp heat (IEC/EN 60068-2-3)		93 % at +40 °C, no condensation
Climatic category (EN 60721)		3k3
Vibration (IEC/EN 60068-2-6)		
Shock (IEC/EN 60068-2-27)		
Isolation data		1SVR 427 081 R0000
Rated isolation voltage U_i (IEC/EN 60947-1, EN 50178, VDE 0160)		250 V
Rated impulse withstand voltage U_{imp} (type test) (IEC 664, VDE 0110)	between all isolated circuits	4 kV; 1.2/50 μ s
Power-frequency withstand voltage test (Test voltage, routine test)	all circuits	2.5 kV AC
Protective separation	all circuits	yes
Pollution degree (IEC/EN 60950)		2

Messaging module CP-C MM

Accessory for CP-C range power supplies

Data sheet

Isolation data		1SVR 427 081 R0000
Overvoltage category (IEC/EN 60950)		II
Standards / Directives		1SVR 427 081 R0000
Product standard		IEC/EN 61204
EMC Directive		2004/108/EC
Low Voltage Directive		2006/95/EC
Electrical safety		EN 50178, EN 60950, UL 60950, UL 508
Electromagnetic compatibility		1SVR 427 081 R0000
Interference immunity to		IEC/EN 61000-6-2
electrostatic discharge	IEC/EN 61000-4-2	Level 3 and 4 (6 kV / 8 kV)
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3 (10 V/m)
electrical fast transient / burst	IEC/EN 61000-4-4	Level 4 and 2 (4 kV power input / 1 kV control input)
surge	IEC/EN 61000-4-5	Level 3 and 2 (4 kV symmetrical power input / 1 kV control input)
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3 (10 V)
Interference emission		IEC/EN 61000-6-3
high-frequency radiated	IEC/CISPR 22, EN 55022	Class B
high-frequency conducted	IEC/CISPR 22, EN 55022	Class B


Messaging module CP-C MM

Accessory for CP-C range power supplies

Data sheet

Dimensions

in mm

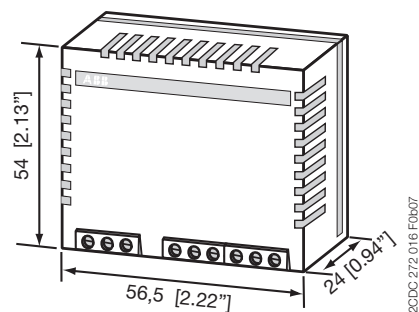

CP-C MM

Further Documentation

Document title	Document type	Document number
Electronic Products and Relays	Technical catalogue	2CDC 110 004 C020x
Power Supply Units	Application manual	2CDC 114 048 M020x

You can find the documentation on the internet at www.abb.com/lowvoltage → Control Products → Power Supplies

Contact us

ABB STOTZ-KONTAKT GmbH

P. O. Box 10 16 80
69006 Heidelberg, Germany
Phone: +49 (0) 6221 7 01-0
Fax: +49 (0) 6221 7 01-13 25
E-mail: info.desto@de.abb.com

You can find the address of your
local sales organisation on the
ABB home page
<http://www.abb.com/contacts>
-> Low Voltage Products and Systems

Note:

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG.

Copyright© 2010 ABB
All rights reserved