


On-load tap-changer type (V)UCGR./F, (V)UCLR./F, UCCR./F,
 25 tap positions, plus/minus switching.
 Min. effective No. of turns in pos. 1.
 The tap-changer is delivered set in pos. 13,
 the preceding pos. was 13A.

Lindningskopplare typ (V)UCGR./F, (V)UCLR./F, UCCR./F,
 25 lägen, plus/minus koppling.
 Min antal effektiva varv i läge 1.
 Lindningskopplaren levereras inställd i läge 13,
 föregående läge var 13A.

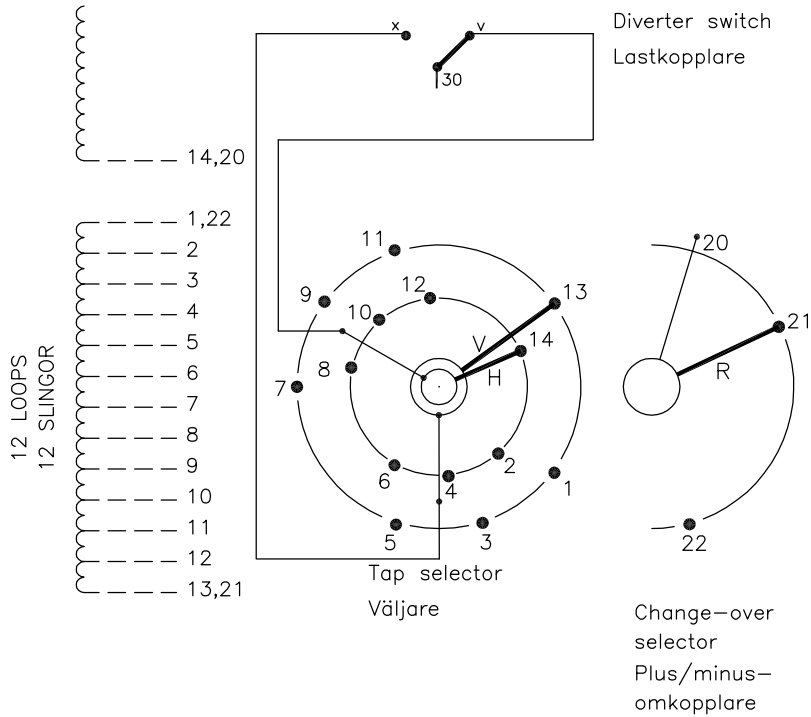

| Pos. Läge | R connects in direction R förbinder i riktning | Tap selector and diverter switch connect Väljaren och lastkopplaren förbinder |
|--------------|---|--|
| 1 | | 1-V-x |
| 2 | | 2-H-v |
| 3 | | 3-V-x |
| 4 | | 4-H-v |
| 5 | | 5-V-x |
| 6 | | 6-H-v |
| 7 | 20-21 | 7-V-x |
| 8 | | 8-H-v |
| 9 | | 9-V-x |
| 10 | | 10-H-v |
| 11 | | 11-V-x |
| 12 | | 12-H-v |
| 13A | | 13-V-x |
| 13 | | 14-H-v |
| 13B | | 1-V-x |
| 14 | | 2-H-v |
| 15 | | 3-V-x |
| 16 | | 4-H-v |
| 17 | | 5-V-x |
| 18 | | 6-H-v |
| 19 | 20-22 | 7-V-x |
| 20 | | 8-H-v |
| 21 | | 9-V-x |
| 22 | | 10-H-v |
| 23 | | 11-V-x |
| 24 | | 12-H-v |
| 25 | | 13-V-x |

The tap-changer is shown in pos. 13,
 the preceding pos. was 13A.
 The tap selector and the change-over selector
 are seen from above.
 Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 13,
 föregående läge var 13A.
 Väljaren och plus/minus-omkopplaren sedda uppifrån.
 Kontaktarm V ligger över kontaktarm H.

A position with letter is a
 through position and gives
 the same voltage as the
 normal position.

Läge med bokstav är genom-
 loppsläge och ger samma
 spänning som normalläget.

Continuous lines show leads included in the
 tap-changer. Dashed lines show leads belonging
 to the cleats and leads.

Heldragna linjer visar ledare som ingår i
 lindningskopplaren. Streckade linjer visar
 ledare som tillhör anslutningsdonet.

| | |
|-------------------|----------------------------|
| Sheet | Cont |
| | Year Week |
| Form No. | Dept |
| | Rev Ind |
| Design checked by | Accepted by qual control |
| | Accepted for prod by |
| Drawn by | Description (English) |
| | Description (own language) |
| Design checked by | File name |
| | Lang |
| Sheet | 1 |
| | Rev Ind |
| Cont | - |
| | - |

| | | | | |
|-------------------|----------------|-----------------------|------|----------------------------|
| Rev Ind | Revision | Appd | Year | Week |
| L.Oberg | | M.Haggmar | | |
| Design checked by | Drawn by | Description (English) | | |
| H.Sundberg | A.Wang | CONNECTION DIAGRAM | | |
| Design checked by | Issued by Dept | Year | Week | Description (own language) |
| N.Gustavsson | CO/TK | 14 | 02 | KOPPLINGSSHEMA |
| 1ZSC004310-AAJ | | | | |

We reserve all rights in this document and in the
 information contained therein. Reproduction, use or
 disclosure to third parties without express authority
 is strictly forbidden.
 © ABB '19