


On-load tap-changer type UCGR./C, VUCGR./C, 27 tap positions, plus/minus switching.
 Min. effective No. of turns in pos. 1.
 The tap-changer is delivered set in pos. 14,
 the preceding pos. was 13.

Lindningskopplare typ UCGR./C, VUCGR./C, 27 lägen,
 plus/minus koppling.
 Min antal effektiva varv i läge 1.
 Lindningskopplaren levereras inställd i läge 14,
 föregående läge var 13.

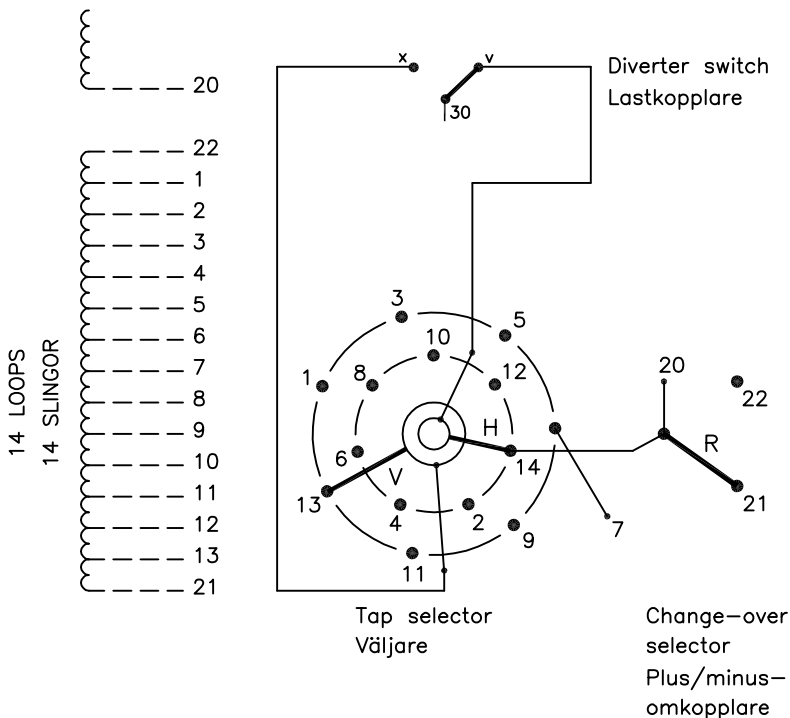

Pos. Läge	R connects in direction R förbinder i riktning	Tap selector and diverter switch connect Väljaren och lastkopplaren förbinder
1		1-V-x
2		2-H-v
3		3-V-x
4		4-H-v
5		5-V-x
6		6-H-v
7	20-21	7-V-x
8		8-H-v
9		9-V-x
10		10-H-v
11		11-V-x
12		12-H-v
13	20-21	13-V-x
14		14-H-v
15		1-V-x
16		2-H-v
17		3-V-x
18		4-H-v
19		5-V-x
20		6-H-v
21	20-22	7-V-x
22		8-H-v
23		9-V-x
24		10-H-v
25		11-V-x
26		12-H-v
27		13-V-x

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © ABB 19

The tap-changer is shown in pos. 14,
 the preceding pos. was 13.
 The tap selector and the change-over selector
 are seen from above.
 Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 14,
 föregående läge var 13.
 Väljaren och plus/minus-omkopplaren sedda uppifrån.
 Kontaktarm V ligger över kontaktarm H.

Continuous lines show leads included in the
 tap-changer. Dashed lines show leads belonging
 to the cleats and leads.

Heldragna linjer visar ledare som ingår i
 lindningskopplaren. Streckade linjer visar
 ledare som tillhör anslutningsdonet.

Sheet	Cont		
Year	Week		
Dept			
Rev Ind	Revision	Appd	Year Week
1	VUCG Added.	TOLA	07 47
Accepted by qual control R.Yngvesson		Accepted for prod by	
Description (English) CONNECTION DIAGRAM		DATA ORIGINAL	
Design checked by B-O.Stenestam		Description (own language) KOPPLINGSSCHEMA	
Drawn by L.Bergman		File name 0377-9	
Drawing checked by M.Hedlund		Lang Sheet 1	
Issued by Dept Year Week COM/TKO 97 21		Rev Ind Cont -	
Asea Brown Boveri		5492 0377-9	