


On-load tap-changer type UCGD./C, VUCGD./C, 19 tap positions, coarse/fine switching.  
 Min. effective No. of turns in pos. 1.  
 The tap-changer is delivered set in pos. 10, the preceding pos. was 9.

Lindningskopplare typ UCGD./C, VUCGD./C, 19 lägen, grov/fin koppling.  
 Min antal effektiva varv i läge 1.  
 Lindningskopplaren levereras inställd i läge 10, föregående läge var 9.

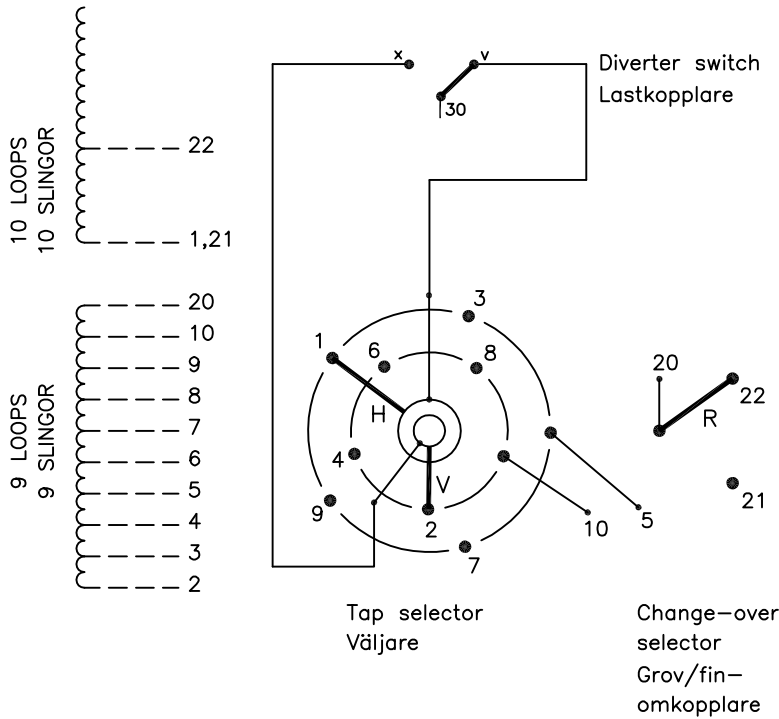

Pos. Läge	R connects in direction R förbinder i riktning	Tap selector and diverter switch connect Väljaren och lastkopplaren förbinder
1	↓	10-V-x
2		9-H-v
3		8-V-x
4		7-H-v
5	20-22	6-V-x
6	↑	5-H-v
7		4-V-x
8		3-H-v
9	↓	2-V-x
10		1-H-v
11	↑	10-V-x
12		9-H-v
13		8-V-x
14		7-H-v
15	20-21	6-V-x
16	↓	5-H-v
17		4-V-x
18		3-H-v
19	↑	2-V-x

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © ABB 19

The tap-changer is shown in pos. 10, the preceding pos. was 9.  
 The tap selector and the change-over selector are seen from above.  
 Contact arm H is located above contact arm V.

Lindningskopplaren visad i läge 10, föregående läge var 9.  
 Väljaren och grov/fin-omkopplaren sedda uppifrån.  
 Kontaktarm H ligger över kontaktarm V.

Continuous lines show leads included in the tap-changer. Dashed lines show leads belonging to the cleats and leads.

Heldragna linjer visar ledare som ingår i lindningskopplaren. Streckade linjer visar ledare som tillhör anslutningsdonet.

Sheet	Cont		
Year	Week		
Dept			
Rev Ind	Revision	Appd	Year Week
1	VUCG Added.	TOLA	07 47
Accepted by qual control	Accepted for prod by	Description (English)	
R.Yngvesson		CONNECTION DIAGRAM	
Design checked by	Drawn by	Description (own language)	
B-O.Stenestam	L.Bergman	KOPPLINGSSCHEMA	
Drawing checked by	Issued by Dept Year Week	Lang	Sheet
M.Hedlund	COM/TKO 97 22		1
		5492 0378-5	
Asea Brown Boveri		Rev Ind	Cont
			-