


DATA SHEET

DX531

Digital input/output module

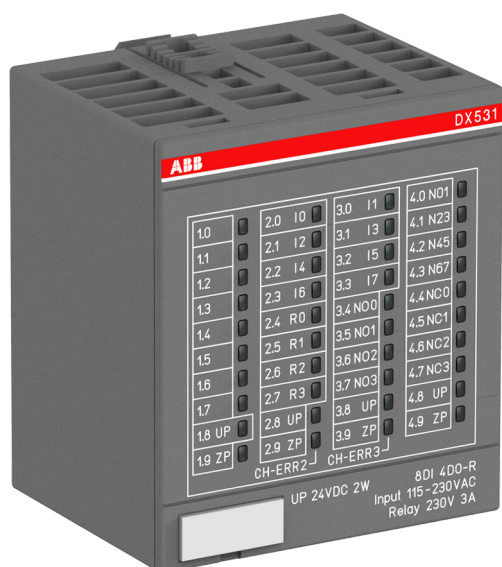


1 Ordering data

Part no.	Description	Product life cycle phase *)
1SAP 245 000 R0001	DX531, digital input/output module, 8 DI, 120 / 230 V AC, 4 DO relays, 2-wires	Active



*) Modules in lifecycle Classic are available from stock but not recommended for planning and commissioning of new installations.

2 Dimensions

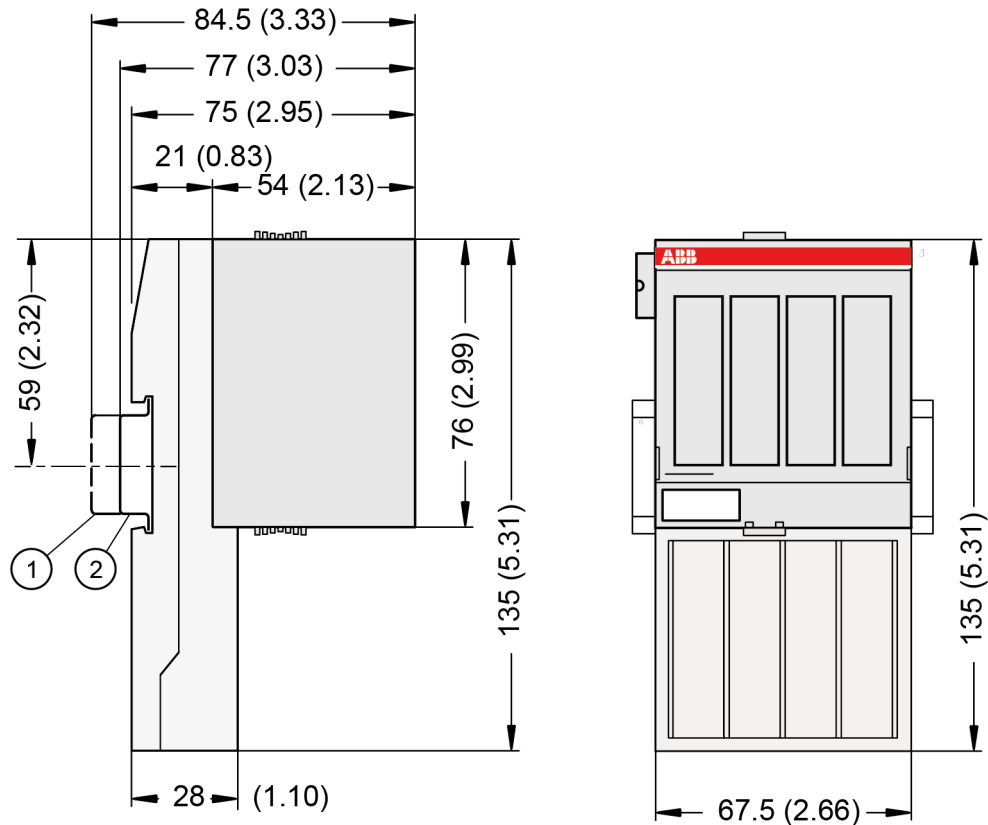

- 1 Din rail 15 mm
- 2 Din rail 7.5 mm



The dimensions are in mm and in brackets in inch.

3 Technical data

The system data of AC500 and S500 are applicable to the standard version ↗ *Chapter 4 "System data AC500" on page 5.*

The system data of AC500-XC are applicable to the XC version.

Only additional details are therefore documented below.

The technical data are also applicable to the XC version.

3.1 Technical data of the module

Parameter	Value
Process supply voltage UP	
Connections	Terminals 1.8, 2.8, 3.8 and 4.8 for +24 V DC (UP) as well as 1.9, 2.9, 3.9 and 4.9 for 0 V DC (ZP)
Rated value	24 V DC

Parameter		Value
	Max. ripple	5 %
	Protection against reversed voltage	Yes
	Rated protection fuse on UP	10 A fast
	Galvanic isolation	Yes, per module
Current consumption		
	From 24 V DC power supply at the terminals UP/L+ and ZP/M of the CPU/communication interface module	ca. 2 mA
	From UP at normal operation / with outputs	0.15 A + output loads
Inrush current from UP (at power up)		0.004 A ² s
Max. power dissipation within the module		6 W (outputs OFF)
Weight (without terminal unit)		Ca. 300 g
Mounting position		Horizontal or vertical with derating (output load reduced to 50 % at +40 °C per group)
Cooling		The natural convection cooling must not be hindered by cable ducts or other parts in the control cabinet.


NOTICE!

All I/O channels (digital and analog) are protected against reverse polarity, reverse supply, short circuit and temporary overvoltage up to 30 V DC.

No effects of multiple overloads

No effects of multiple overloads on isolated multi-channel modules occur, as every channel is protected individually by an external fuse.

3.2 Technical data of the digital inputs

Parameter	Value
Number of channels per module	8
Distribution of the channels into groups	4 groups of 2 channels each
Terminals of the channels I0 to I7	
Galvanic isolation	2500 V AC from the rest of the module (I/O bus)
Indication of the input signals	1 yellow LED per channel The LEDs are only operating if the module is initialized
Monitoring point of input indicator	LED is controlled by process CPU
Input type acc. to EN 61131-2	Type 2
Input delay (0->1 or 1->0)	Typ. 20 ms
Input signal voltage	230 V AC or 120 V AC
Input signal range	0 V AC ... 265 V AC
Input signal frequency	47 Hz ... 63 Hz
Input characteristic	According EN 61132-2 Type 2

Parameter	Value
Signal 0	0 V AC ... 40 V AC
Undefined signal	> 40 V AC ... < 74 V AC
Signal 1	74 V AC ... 265 V AC
Input current per channel	
Input voltage = 159 V AC	> 7 mA
Input voltage = 40 V AC	< 5 mA
Overvoltage protection	Yes
Max. cable length	
Shielded	1000 m
Unshielded	600 m

3.3 Technical data of the relay outputs

Parameter	Value
Number of channels per module	4 relay outputs
Distribution of channels into groups	4 groups of 1 channel each
Connection of the four relays	
Galvanic isolation	Between the channels and from the rest of the module
Indication of the output signals	1 yellow LED per channel, the LED is ON when the relay coil is energized
Monitoring point of output indicator	LED is controlled by process CPU
Way of operation	Non-latching type
Output delay (0->1 or 1->0)	On request
Relay power supply	By UP process supply voltage
Relay outputs	
Output short circuit protection	Must be provided externally with a fuse or circuit breaker
Rated protection fuse	6 A gL/gG per channel
Output switching capacity	
Resistive load, max.	3 A; 3 A (230 V AC), 2 A (24 V DC)
Inductive load, max.	1.5 A; 1.5 A (230 V AC), 1.5 A (24 V DC)
Lamp load	60 W (230 V AC), 10 W (24 V DC)
Lifetime (cycles)	Mechanical: 300 000; Under load: 300 000 (24 V DC at 2 A), 200 000 (120 V AC at 2 A), 100 000 (230 V AC at 3 A)
Spark suppression with inductive AC load	Must be performed externally according to driven load specifications
Demagnetization with inductive DC load	A free-wheeling diode must be circuited in parallel to the inductive load
Switching frequency	
With resistive load	Max. 10 Hz

Parameter		Value
	With inductive load	Max. 2 Hz
	With lamp load	On request
Max. cable length		
	Shielded	1000 m
	Unshielded	600 m

4 System data AC500

4.1 Environmental conditions

Table 1: Process and supply voltages

Parameter		Value
24 V DC		
	Voltage	24 V (-15 %, +20 %)
	Protection against reverse polarity	Yes
120 V AC		
	Voltage	120 V (-15 %, +10 %)
	Frequency	50/60 Hz (-6 %, +4 %)
230 V AC		
	Voltage	230 V AC (-15 %, +10 %)
	Frequency	50/60 Hz (-6 %, +4 %)
120 V AC...240 V AC wide-range supply		
	Voltage	120 V ... 240 V (-15 %, +10 %)
	Frequency	50/60 Hz (-6 %, +4 %)
Allowed interruptions of power supply, according to EN 61131-2		
	DC supply	Interruption < 10 ms, time between 2 interruptions > 1 s, PS2
	AC supply	Interruption < 0.5 periods, time between 2 interruptions > 1 s



NOTICE!

Risk of damaging the PLC due to improper voltage levels!

- Never exceed the maximum tolerance values for process and supply voltages.
- Never fall below the minimum tolerance values for process and supply voltages. Observe the **system data** ↗ Chapter 4 "System data AC500" on page 5 and the **technical data** of the module used.



NOTICE!

Improper voltage level or frequency range which cause damage of AC inputs:

- AC voltage above 264 V
- Frequency below 47 Hz or above 62.4 Hz



NOTICE!

Improper connection leads cause overtemperature on terminals.

PLC modules may be destroyed by using wrong cable type, wire size and cable temperature classification.

Parameter		Value
Temperature		
	Operating	0 °C ... +60 °C: Horizontal mounting of modules. 0 °C ... +40 °C: Vertical mounting of modules. Output load reduced to 50 % per group.
	Storage	-40 °C ... +70 °C
	Transport	-40 °C ... +70 °C
Humidity		Max. 95 %, without condensation
Air pressure		
	Operating	> 800 hPa / < 2000 m
	Storage	> 660 hPa / < 3500 m

4.2 Creepage distances and clearances

The creepage distances and clearances meet the requirements of the overvoltage category II, pollution degree 2.

4.3 Insulation test voltages, routine test

According to EN 61131-2

Parameter	Value	
230 V circuits against other circuitry	2500 V	1.2/50 µs
120 V circuits against other circuitry	1500 V	1.2/50 µs
120 V ... 240 V circuits against other circuitry	2500 V	1.2/50 µs
24 V circuits (supply, 24 V inputs/outputs, analog inputs/outputs), if they are galvanically isolated against other circuitry	500 V	1.2/50 µs
COM interfaces, galvanically isolated	500 V	1.2/50 µs
Ethernet	500 V	1.2/50 µs
230 V circuits against other circuitry	1350 V	AC 2 s

Parameter	Value	
120 V circuits against other circuitry	820 V	AC 2 s
120 V ... 240 V circuits against other circuitry	1350 V	AC 2 s
24 V circuits (supply, 24 V inputs/outputs, analog inputs/outputs), if they are galvanically isolated against other circuitry	350 V	AC 2 s
COM interfaces, galvanically isolated	350 V	AC 2 s
Ethernet	350 V	AC 2 s

According to
IEC 61010-2-201



The content of the following table is only valid for PM56xx, CM56xx and TB56xx.

Table 2: Insulation, test voltages and continuous voltages

	Insulation	Test Voltage	Continuous Voltage
COM interfaces, galvanically isolated	1.1 mm	1216 V DC (60 s) 1500 V (1.2/50µs)	75 V
CAN interface, galvanically isolated	1.1 mm	1216 V DC (60 s) 1500 V (1.2/50µs)	75 V
Ethernet	1.1 mm	1500 V rms (50-60 Hz, 60 s) 2400 V (1.2/50µs)	On request

4.4 Power supply units

For the supply of the modules, power supply units according to SELV or PELV specifications must be used.



Safety Extra Low Voltage (SELV) and Protective Extra Low Voltage (PELV)

To ensure electrical safety of AC500/AC500-eCo extra low voltage circuits, 24 V DC supply, communication interfaces, I/O circuits, and all connected devices must be powered from sources meeting requirements of SELV, PELV, class 2, limited voltage or limited power according to applicable standards.

**WARNING!****Improper installation can lead to death by touching hazardous voltages!**

To avoid personal injury, safe separation, double or reinforced insulation and separation of the primary and secondary circuit must be observed and implemented during installation.

- Only use power converters for safety extra-low voltages (SELV) with safe galvanic separation of the primary and secondary circuit.
- Safe separation means that the primary circuit of mains transformers must be separated from the secondary circuit by double or reinforced insulation. The protective extra-low voltage (PELV) offers protection against electric shock.

4.5 Electromagnetic compatibility

Table 3: Range of use

Application
Device suitable only as <i>Control Equipment for Industrial Applications</i> .

Table 4: Immunity against electrostatic discharge (ESD), according to IEC 61000-4-2, zone B, criterion B

Parameter	Value
Electrostatic voltage in case of air discharge	8 kV
Electrostatic voltage in case of contact discharge	4 kV, in a closed control cabinet 6 kV ¹⁾
ESD with communication connectors	In order to prevent operating malfunctions, it is recommended, that the operating personnel discharge themselves prior to touching communication connectors or perform other suitable measures to reduce effects of electrostatic discharges.
ESD with connectors of terminal bases	The connectors between the terminal bases and processor modules or communication modules must not be touched during operation. The same is valid for the I/O bus with all modules involved.

¹⁾ High requirement for shipping classes are achieved with additional specific measures (see specific documentation).

Table 5: Immunity against the influence of radiated (CW radiated), according to IEC 61000-4-3, zone B, criterion A

Parameter	Value
Test field strength	10 V/m

Table 6: Immunity against fast transient interference voltages (burst), according to IEC 61000-4-4, zone B, criterion B

Parameter	Value
Power supply (DC)	2 kV
Power supply (AC)	2 kV
Digital inputs/outputs (24 V DC)	1 kV
Digital inputs/outputs (120 V AC ... 240 V AC)	2 kV

Parameter	Value
Analog inputs/outputs	1 kV
CS31 bus	1 kV
Serial RS-485 interfaces (COM)	1 kV
Serial RS-232 interfaces (COM)	1 kV
Ethernet	1 kV
I/O supply (DC-out)	1 kV

Table 7: Immunity against the influence of line-conducted interferences (CW conducted), according to IEC 61000-4-6, zone B, criterion A

Parameter	Value
Test voltage	3V zone B, 10 V is also met.
High energy surges	According to IEC 61000-4-5, zone B, criterion B
Power supply (DC)	1 kV CM / 0.5 kV DM ²⁾
DC I/O supply	0.5 kV CM / 0.5 kV DM ²⁾
Communication Lines, shielded	1 kV CM ²⁾
AC I/O unshielded ³⁾	2 kV CM / 1 kV DM ²⁾
I/O analog, I/O DC unshielded ³⁾	1 kV CM / 0.5 kV DM ²⁾
Radiation (radio disturbance)	According to IEC 55011, group 1, class A

²⁾ CM = Common Mode, DM = Differential Mode

³⁾ When DC I/O inputs are used with AC voltage, external filters limiting high energy surges to 1 kV CM / 0.5 DM are required to meet requirements according IEC 61131-2.

4.6 Mechanical data

Parameter	Value
Mounting	Horizontal
Degree of protection	PLC system: IP 20 <ul style="list-style-type: none"> ● with all modules plugged in ● with all terminals plugged in ● with all covers closed
Housing	Classification V-2 according to UL 94
Vibration resistance acc. to EN 61131-2	all three axes 2 Hz ... 8.4 Hz, continuous 3.5 mm 8.4 Hz ... 150 Hz, continuous 1 g (higher values on request)
Shock test	All three axes 15 g, 11 ms, half-sinusoidal
Mounting of the modules:	
DIN rail according to DIN EN 50022	35 mm, depth 7.5 mm or 15 mm
Mounting with screws	Screws with a diameter of 4 mm
Fastening torque	1.2 Nm

4.7 Approvals and certifications

Information on approvals and certificates can be found in the PLC Automation *catalog*, in the table "Certifications" in the chapter "Additional information".

ABB AG
Eppelheimer Str. 82
69123 Heidelberg, Germany
Telephone: +49 (0)6221 701 1444
E-mail: plc.support@de.abb.com
new.abb.com/plc
new.abb.com/plc/automationbuilder
new.abb.com/contact-centers

© Copyright 2017-2023 ABB.

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden.