


On-load tap-changer type UCGL./III, VUCGL./III, UCLL./III, VUCLL./III, UC DL./III,
 15 tap positions, linear switching.
 Min. effective No. of turns in pos. 1.
 The tap-changer is delivered set in pos. 8,
 the preceding pos. was 7.

Lindningskopplare typ UCGL./III, VUCGL./III, UCLL./III, VUCLL./III, UC DL./III,
 15 lägen, linjär koppling.
 Min antal effektiva varv i läge 1.
 Lindningskopplaren levereras inställd i läge 8,
 föregående läge var 7.

Pos. Läge	Tap selector and diverter switch connect	30
1	1-V-x	
2	2-H-v	
3	3-V-x	
4	4-H-v	
5	5-V-x	
6	6-H-v	
7	7-V-x	
8	8-H-v	
9	9-V-x	
10	10-H-v	
11	11-V-x	
12	12-H-v	
13	13-V-x	
14	14-H-v	
15	15-V-x	

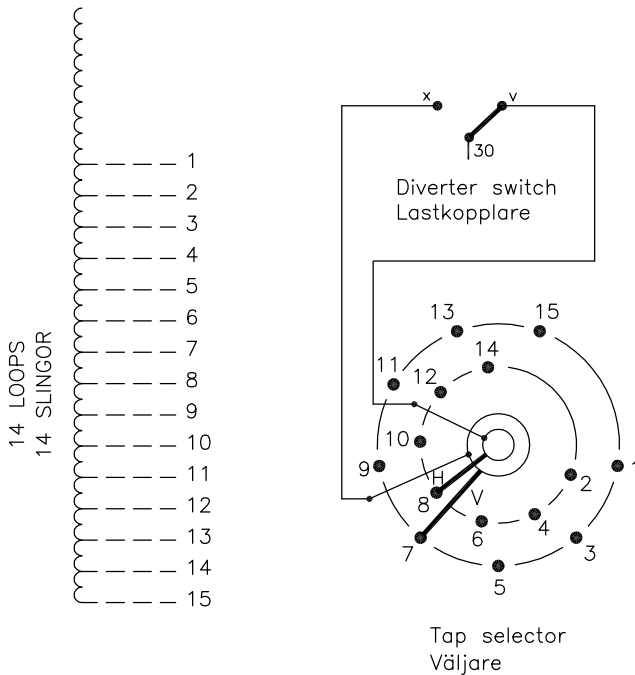

The tap-changer is shown in pos. 8,
 the preceding pos. was 7.
 The tap selector is seen from above.
 Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 8,
 föregående läge var 7.
 Väljaren sedd uppifrån.
 Kontaktarm V ligger över kontaktarm H.

Continuous lines show leads included in the
 tap-changer. Dashed lines show leads belonging
 to the cleats and leads.

Heldragna linjer visar ledare som ingår i
 lindningskopplaren. Streckade linjer visar
 ledare som tillhör anslutningsdonet.

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © ABB '19

3	Tap selector figure changed.	THLA	17	07
2	VUCL Added	CA	12	37
1	VUCG Added	CE	07	47
Rev Ind	Revision	Appd	Year	Week

Accepted by qual control R.Yngvesson	Accepted for prod by	Description (English) CONNECTION DIAGRAM	DATAORIGINAL	
Design checked by B-O.Stenestam	Drawn by L.Bergman	Description (own language) KOPPLINGSSHEMA	File name 0370-7	
Drawing checked by M.Hedlund	Issued by Dept Year Week COM/TKO 97 23	Lang 1		Sheet 1
Asea Brown Boveri		5492 0370-7		RevInd Cont -

Sheet	Cont
Year	Week
Dept	
RevInd	
Design checked by	
Drawn by	
Form No.	