


On-load tap-changer type UCGD./C, VUCGD./C, 23 tap positions, coarse/fine switching.
 Min. effective No. of turns in pos. 1.
 The tap-changer is delivered set in pos. 12, the preceding pos. was 11.

Lindningskopplare typ UCGD./C, VUCGD./C, 23 lägen, grov/fin koppling.
 Min antal effektiva varv i läge 1.
 Lindningskopplaren levereras inställd i läge 12, föregående läge var 11.

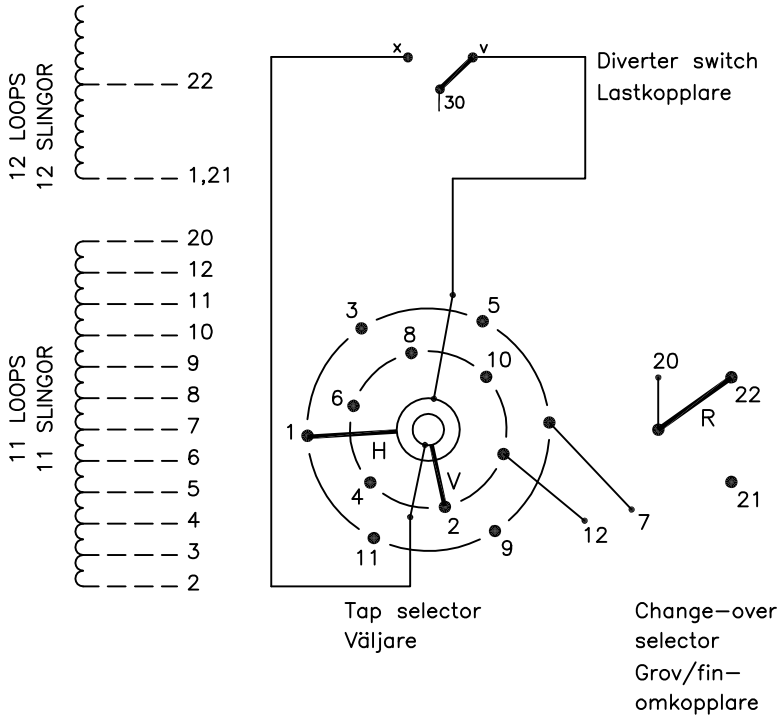

| Pos. Läge | R connects in direction R förbinder i riktning | Tap selector and diverter switch connect Väljaren och lastkopplaren förbinder | |
|--------------|---|--|-------|
| 1 | ↓ | 12-V-x | |
| 2 | | 11-H-v | |
| 3 | | 10-V-x | |
| 4 | | 9-H-v | |
| 5 | | 8-V-x | |
| 6 | | 20-22 | 7-H-v |
| 7 | | 20-22 | 6-V-x |
| 8 | | ↑ | 5-H-v |
| 9 | | | 4-V-x |
| 10 | | | 3-H-v |
| 11 | | | 2-V-x |
| 12 | 1-H-v | | |
| 13 | ↑ | 12-V-x | |
| 14 | | 11-H-v | |
| 15 | | 10-V-x | |
| 16 | | 9-H-v | |
| 17 | | 8-V-x | |
| 18 | | 20-21 | 7-H-v |
| 19 | | 20-21 | 6-V-x |
| 20 | | ↓ | 5-H-v |
| 21 | | | 4-V-x |
| 22 | | | 3-H-v |
| 23 | | | 2-V-x |

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © ABB 19

The tap-changer is shown in pos. 12, the preceding pos. was 11.
 The tap selector and the change-over selector are seen from above.
 Contact arm H is located above contact arm V.

Lindningskopplaren visad i läge 12, föregående läge var 11.
 Väljaren och grov/fin-omkopplaren sedda uppifrån.
 Kontaktarm H ligger över kontaktarm V.

Continuous lines show leads included in the tap-changer. Dashed lines show leads belonging to the cleats and leads.

Heldragna linjer visar ledare som ingår i lindningskopplaren. Streckade linjer visar ledare som tillhör anslutningsdonet.

| | | | |
|--------------------------|----------------------|----------------------------|-----------|
| Sheet | Cont | | |
| Year | Week | | |
| Dept | | | |
| Rev Ind | Revision | Appd | Year Week |
| 1 | VUCG Added. | TOLA | 07 47 |
| Accepted by qual control | Accepted for prod by | Description (English) | |
| R.Yngvesson | | CONNECTION DIAGRAM | |
| Design checked by | Drawn by | Description (own language) | |
| B-O.Stenestam | L.Bergman | KOPPLINGSSCHEMA | |
| Drawing checked by | Issued by Dept | Year | Week |
| M.Hedlund | COM/TKO | 97 | 22 |
| ABB | | Asea Brown Boveri | |
| | | 5492 0378-7 | |
| Lang | Sheet | | |
| | 1 | | |
| Rev Ind | Cont | | |
| | - | | |