


On-load tap-changer type UCCL., 15 tap positions, linear switching.
 Min. effective No. of turns in pos. 1.
 The tap-changer is delivered set in pos. 8, the preceding pos. was 7.

Lindningskopplare typ UCCL., 15 lägen, linjär koppling.
 Min antal effektiva varv i läge 1.
 Lindningskopplaren levereras inställd i läge 8, föregående läge var 7.

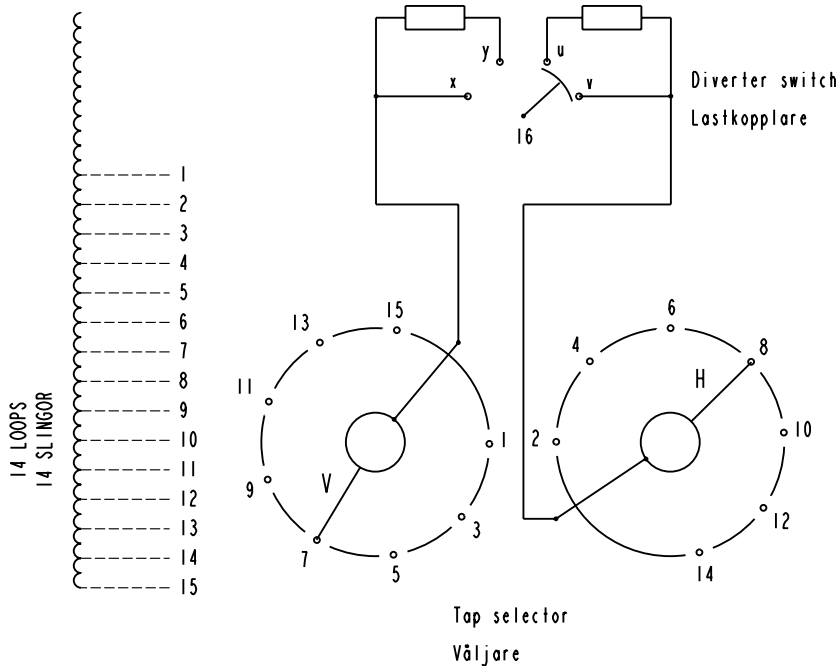

Pos. Läge	Tap selector and diverter switch connect	Väljaren och lastkopplaren förbinder
1	1-V-x	16
2	2-H-v	
3	3-V-x	
4	4-H-v	
5	5-V-x	
6	6-H-v	
7	7-V-x	
8	8-H-v	
9	9-V-x	
10	10-H-v	
11	11-V-x	
12	12-H-v	
13	13-V-x	
14	14-H-v	
15	15-V-x	

Switching Sequence/Omkopplingsförlopp

Reversal of switching direction

The contact arms will be at rest during the first operation. The switching is performed by means of the diverter switch only.

Växling av omkopplingsriktning

Kontaktarmarna står stilla under första manövern och omkopplingen utförs enbart medelst lastkopplaren.

From even to odd positions

Contact arm V moves one step, after which the diverter switch contacts operate as follows: v opens, y closes, u opens and x closes.

Från jämna till udda lägen

Kontaktarm V flyttar sig ett steg, varefter lastkopplaren kopplar: v bryter, y sluter, u bryter och x sluter.

From odd to even positions

Contact arm H moves one step, after which the diverter switch contacts operate as follows: x opens, u closes, y opens and v closes.

Från udda till jämna lägen

Kontaktarm H flyttar sig ett steg, varefter lastkopplaren kopplar: x bryter, u sluter, y bryter och v sluter.

Sheet	Cont	Year	Week	Appd	Year	Week	
Rev Ind	Revision	Accepted for prod by	Description (English) CONNECTION DIAGRAM				DATAORIGINAL
Rev Ind	Revision	Accepted for prod by	Description (own language) KOPPLINGSSCHEMA				File name 0382-4
Design checked by	B-O. Stenestam	Drawn by	L. Bergman	Issued by Dept		Year Week	
Design checked by	M. Hedlund	Issued by Dept	Year Week	Lang		Sheet	
ABB			Asea Brown Boveri		5492 0382-4		
Rev Ind	Cont						

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © ABB 19