

Selection guide

Ratings and dimensions

Type code	Heavy-duty HP class 30 starts	Normal-duty HP class 10 starts	Volts	Amps	SCCR rating (kA)	Enclosure size H" x W" x D"	Weight in lbs
E15-B_-48-ND	10	15	480	25	65	24 x 20 x 12	70
E20-B_-48-ND	15	20	480	28	65	24 x 20 x 12	70
E30-B_-48-ND	25	30	480	42	65	24 x 20 x 12	70
E50-B_-48-ND	40	50	480	68	65	24 x 20 x 12	70
E75-B_-48-ND	60	75	480	104	65	24 x 20 x 12	70
E100-B_-48-ND	75	100	480	130	65	36 x 24 x 12	115
E125-B_-48-ND	100	125	480	169	65	36 x 24 x 12	120
E150-B_-48-ND	125	150	480	192	65	36 x 24 x 12	245
E200-B_-48-ND	150	200	480	248	65	48 x 36 x 16	260
E250-B_-48-ND	200	250	480	302	65	48 x 36 x 16	265
E300-B_-48-ND	250	300	480	361	65	48 x 36 x 16	265

Replace _ in the type code for specific enclosure type:

2 = NEMA/UL Type 12
 3 = NEMA/UL Type 3R
 4 = NEMA/UL Type 4




Typical heavy-duty applications include:


- Centrifugal fan
- Conveyor belt (long)
- Crusher
- Mill
- Mixer
- Stirrer

Typical normal-duty applications include:

- Belt thruster
- Centrifugal pump
- Compressor
- Conveyor belt (short)
- Elevator

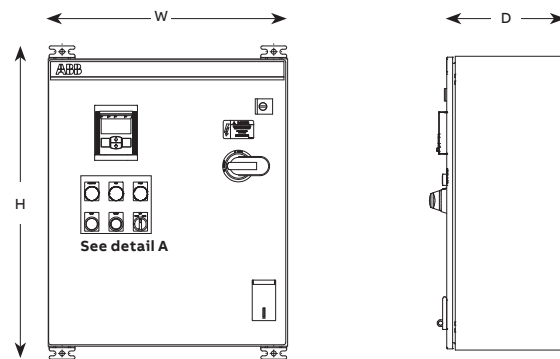

Detail A

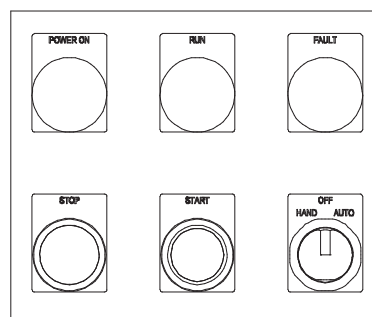

Door-mounted pilot devices include:

- PSE keypad
- Hand-off-auto selector switch
- Start and stop pushbuttons
- Power on pilot light
- Run pilot light
- Fault pilot light

ABB Inc
 305 Gregson Dr
 Cary, NC 27511

electrification.us.abb.com

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB Inc. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB Inc. © 2021 ABB Inc. All rights reserved