


On-load tap-changer type UCGD./C, VUCGD./C, 17 tap positions, coarse/fine switching.
 Min. effective No. of turns in pos. 1.
 The tap-changer is delivered set in pos. 9, the preceding pos. was 9A.

Lindningskopplare typ UCGD./C, VUCGD./C, 17 lägen, grov/fin koppling.
 Min antal effektiva varv i läge 1.
 Lindningskopplaren levereras inställd i läge 9, föregående läge var 9A.

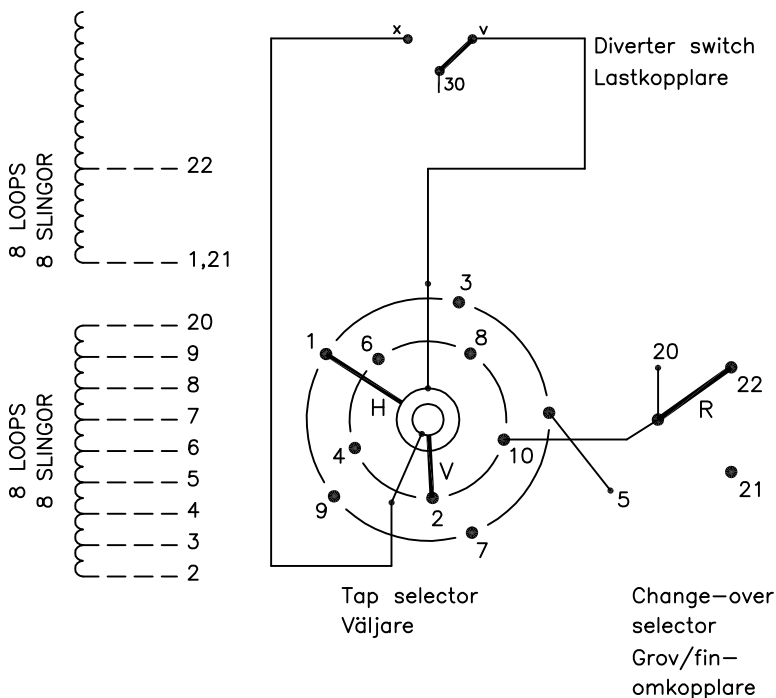

Pos. Läge	R connects in direction R förbinder i riktning	Tap selector and diverter switch connect Väljaren och lastkopplaren förbinder
1	20-22	10-V-x
2		9-H-v
3		8-V-x
4		7-H-v
5		6-V-x
6		5-H-v
7		4-V-x
8		3-H-v
9A		2-V-x
9	20-21	1-H-v
9B		10-V-x
10		9-H-v
11		8-V-x
12		7-H-v
13		6-V-x
14		5-H-v
15		4-V-x
16		3-H-v
17	2-V-x	

A position with letter is a through position and gives the same voltage as the normal position.

Läge med bokstav är genomloppsläge och ger samma spänning som normalläget.

The tap-changer is shown in pos. 9, the preceding pos. was 9A.
 The tap selector and the change-over selector are seen from above.
 Contact arm H is located above contact arm V.

Lindningskopplaren visad i läge 9, föregående läge var 9A.
 Väljaren och grov/fin-omkopplaren sedda uppifrån.
 Kontaktarm H ligger över kontaktarm V.

Continuous lines show leads included in the tap-changer. Dashed lines show leads belonging to the cleats and leads.

Heldragna linjer visar ledare som ingår i lindningskopplaren. Streckade linjer visar ledare som tillhör anslutningsdonet.

Sheet	Cont	Year	Week	Dept	1	VUCG Added.	TOLA	07	47		
Rev Ind	Revision	Appd	Year	Week	Accepted by qual control	Accepted for prod by	Description (English)			DATAORIGINAL	
Rev Ind	Revision	Appd	Year	Week	R.Yngvesson		CONNECTION DIAGRAM				
Design checked by	Design checked by	Drawn by	Issued by	Dept	Year	Week	Description (own language)			File name	
B-O.Stenestam	M.Hedlund	L.Bergman	COM/TKO	97	22		KOPPLINGSSCHEMA			0378-4	
							Asea Brown Boveri			Lang	Sheet
							5492 0378-4			1	
										Rev Ind	Cont
										-	

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © ABB 19