


On-load tap-changer type UCGL./III, VUCGL./III, UCLL./III, VUCLL./III, UC DL./III,  
 14 tap positions, linear switching.  
 Min. effective No. of turns in pos. 1.  
 The tap-changer is delivered set in pos. 8,  
 the preceding pos. was 3.

Lindningskopplare typ UCGL./III, VUCGL./III, UCLL./III, VUCLL./III, UC DL./III,  
 14 lägen, linjär koppling.  
 Min antal effektiva varv i läge 1.  
 Lindningskopplaren levereras inställd i läge 8,  
 föregående läge var 3.

Pos. Läge	Tap selector and diverter switch connect	30
1	1-V-x	
2	2-H-v	
3	3-V-x	
4	4-H-v	
5	5-V-x	
6	6-H-v	
7	7-V-x	
8	8-H-v	
9	9-V-x	
10	10-H-v	
11	11-V-x	
12	12-H-v	
13	13-V-x	
14	14-H-v	

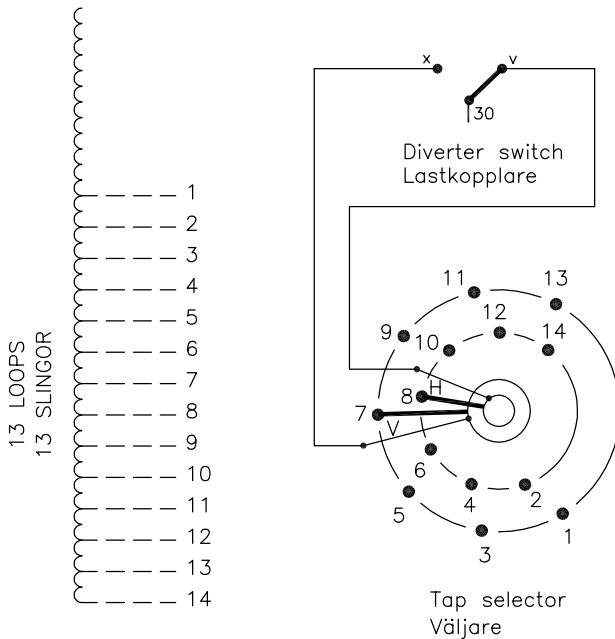

The tap-changer is shown in pos. 8,  
 the preceding pos. was 3.  
 The tap selector is seen from above.  
 Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 8,  
 föregående läge var 3.  
 Väljaren sedd uppifrån.  
 Kontaktarm V ligger över kontaktarm H.

Continuous lines show leads included in the  
 tap-changer. Dashed lines show leads belonging  
 to the cleats and leads.

Heldragna linjer visar ledare som ingår i  
 lindningskopplaren. Streckade linjer visar  
 ledare som tillhör anslutningsdonet.

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © ABB '19

Sheet	Year	Week	Cont			
	Dept	Year	Week	Cont		
Form No.	Rev Ind	Revision	Appd	Year	Week	
	Rev Ind	Revision	Appd	Year	Week	
Design checked by	Accepted by qual control	Accepted for prod by	Description (English)			DATAORIGINAL
	Design checked by	Drawn by	Description (own language)			File name
Design checked by	Drawing checked by	Issued by Dept	Year	Week	Lang	Sheet
	Asea Brown Boveri		5492 0370-6			Rev Ind