

NOTES:

1. RADIO KEY DELAY MUST BE SET BETWEEN 200 & 250 MS. APPROPRIATE SOFTWARE CONTAINING PROM RAD DELAY MUST BE USED.

2

SWITCH SETTING FOR BAUD RATE



SWITCH 4	SWITCH 5	BAUD RATE
OFF	OFF	9600
OFF	ON	4800
ON	OFF	2400
ON	ON	1200

3


ON FOR 60 SECOND TIME-OUT TIMER

REVISIONS

REV	ACTION	DRAWN	CHECKED	APPROVED	DATE
AA	L4744	KASTNER	KASTNER	HOLLAND	97/10/02
AB	D4977	KASTNER	KASTNER	HOLLAND	97/11/21
AC	D12449	KASTNER	KASTNER	HOLLAND	97/11/21

ASSEMBLY/QUANTITY		ITEM NO.	PART NUMBER	DESCRIPTION	REF/ZONE DESIG MATERIAL	UNIT MEAS
PARTS LIST						
DO NOT SCALE DRAWING		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: DECIMAL .XX ± -- ANGULAR ± -- .XXX ± --		PRODUCT LINE TOTALFLOW	LEVEL 3	 TOTALFLOW Products
THIRD ANGLE PROJECTION 		BREAK ALL SHARP CORNERS AND EDGES DIMENSIONS APPLY BEFORE FINISH		DESIGN G. HOLLAND DATE 97/9	TITLE WIRING INTERCONNECT RNET W/MODEM TO GB181 PCBA WI	
				DRAWN A. KASTNER DATE 97/9/29		
				CHECKED A. KASTNER DATE 97/9/29		
				APPROVED G. HOLLAND DATE 97/10/2		
				SCALE NONE	SIZE B	REV AC
				DRAWING ID. 2017449	1 OF 4	

MODEL
6713
6714

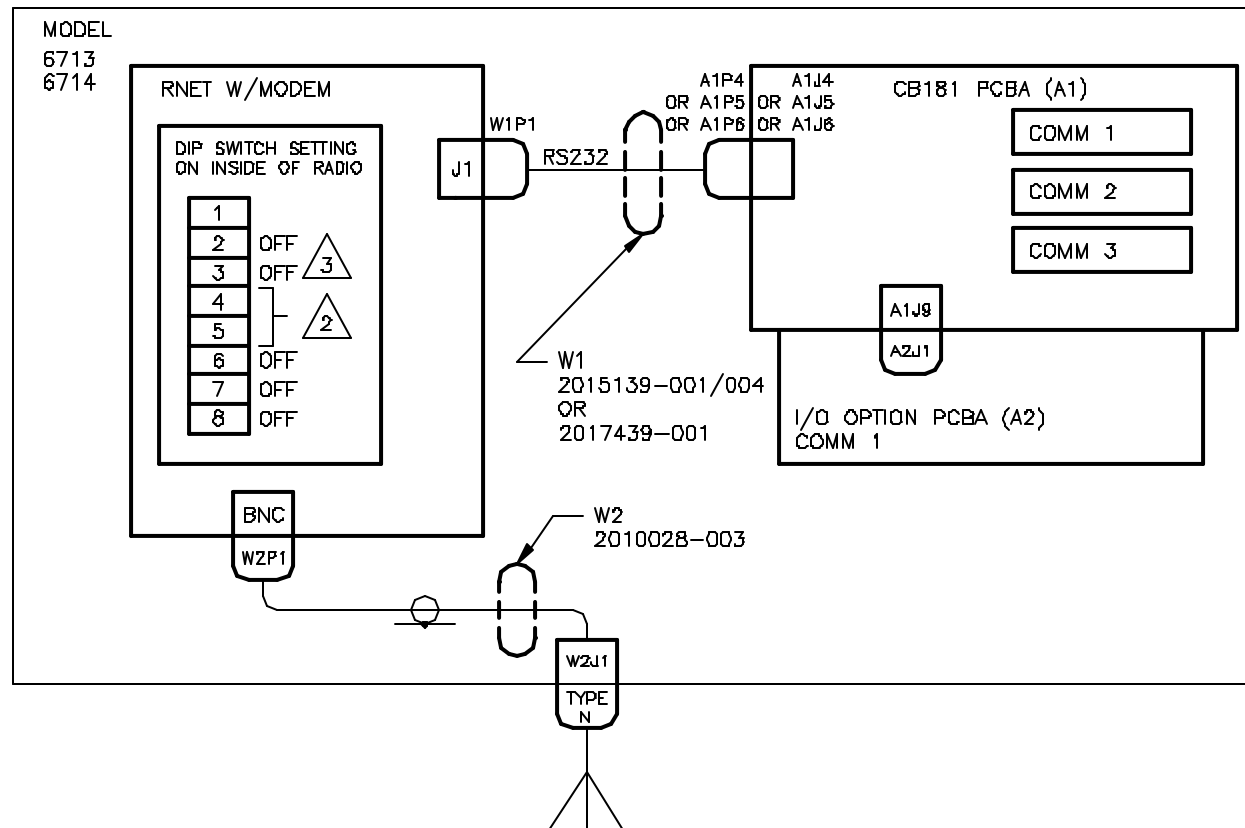

RNET W/MODEM

9POS	SOC		PIN
	J1	W1P1	
	1	1	
RXD	2	2	
TXD	3	3	
+VDC	4	4	
GND	5	5	
	6	6	
RTS	7	7	

BRN
GRN
WHT
BLK
RED

CB181 PCBA

P4	J4	
6	6	RXD
4	4	TXD
1	1	VBAT
2	2	GND
8	8	RTS

RS232 I/O
OPTION PCBA

CB181 WITH RS232 COMM MODULE

CB181 PCBA

P5	J5	
6	6	RXD
4	4	TXD
1	1	VBAT
2	2	GND
8	8	RTS

BRN
GRN
WHT
BLK
RED

CB181 PCBA

P6	J6	
6	6	RXD
4	4	TXD
1	1	VBAT
2	2	GND
8	8	RTS

BRN
GRN
WHT
BLK
RED

RNET W/MODEM

9POS	SOC		PIN
	J1	W1P1	
	1	1	
RXD	2	2	
TXD	3	3	
+VDC	4	4	
GND	5	5	
RTS	7	7	

BRN
GRN
WHT

BLK
RED

CB181 W/RS232 EXPLO PCBA
2012901-002
2015452-002 W/RS232 COMM MODULE
2017475-004/005

CB181 PCBA

P4	J4	
6	6	RXD
4	4	TXD
1	1	VBAT
9	9	CTS
11	11	DCD
2	2	GND
8	8	RTS