


DATA SHEET

# PM554, PM556, PM564, PM566

## Processor Module

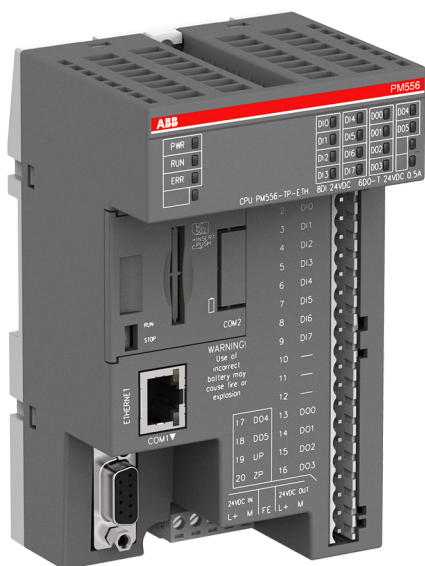

## 1 Ordering Data

Table 1: Processor Modules for AC500-eCo


Part no.	Description	Product Life Cycle Phase *)
1SAP 120 600 R0001	PM554-TP, processor module, 128 kB memory, 8 DI, 6 DO-T, 24 VDC, with pluggable I/O terminal blocks	Active
1SAP 120 600 R0071	PM554-TP-ETH, processor module, 128 kB memory, 8 DI, 6 DO-T, 24 VDC, onboard Ethernet, with pluggable I/O terminal blocks	Active
1SAP 120 700 R0001	PM554-RP, processor module, 128 kB memory, 8 DI, 6 DO-R, 24 VDC, with pluggable I/O terminal blocks	Active
1SAP 120 800 R0001	PM554-RP-AC, processor module, 128 kB memory, 8 DI, 6 DO-R, 100 VAC...240 VAC, with pluggable I/O terminal blocks	Active
1SAP 121 200 R0071	PM556-TP-ETH, processor module, 512 kB memory, 8 DI, 6 DO-T, 24 VDC, onboard Ethernet, with pluggable I/O terminal blocks	Active
1SAP 120 900 R0001	PM564-TP, processor module, 128 kB memory, 6 DI, 6 DO-T, 2 AI and 1 AO, 24 VDC	Active

Part no.	Description	Product Life Cycle Phase *)
1SAP 120 900 R0071	PM564-TP-ETH, processor module, 128 kB memory, 6 DI, 6 DO-T 2 AI and 1 AO, 24 VDC, Ethernet interface	Active
1SAP 121 000 R0001	PM564-RP, processor module, 128 kB memory, 6 DI, 6 DO-R, 2 AI and 1 AO, 24 VDC	Active
1SAP 121 100 R0001	PM564-RP-AC, processor module, 128 kB memory, 6 DI, 6 DO-R, 2 AI and 1 AO, 100 VAC...240 VAC	Active
1SAP 121 000 R0071	PM564-RP-ETH, processor module, 128 kB memory, 6 DI, 6 DO-R, 2 AI and 1 AO, 24 VDC, Ethernet interface	Active
1SAP 121 100 R0071	PM564-RP-ETH-AC, processor module, 128 kB memory, 6 DI, 6 DO-R, 2 AI and 1 AO, 100 VAC...240 VAC, Ethernet interface	Active
1SAP 121 500 R0071	PM566-TP-ETH, processor module, 512 kB memory, 6 DI, 6 DO-T, 2 AI and 1 AO, 24 VDC, Ethernet interface	Active



\*) *For planning and commissioning of new installations use modules in Active status only.*

## 1.1 Dimensions

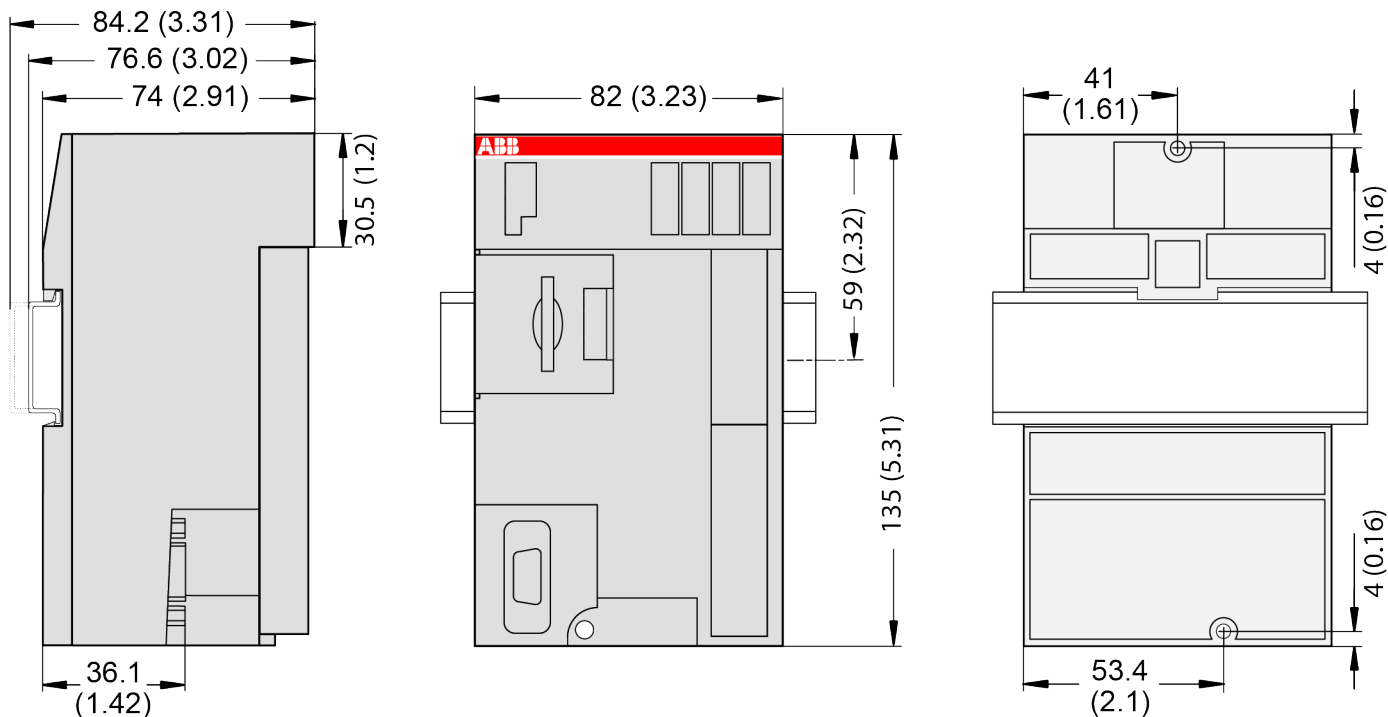

The dimensions are in mm and in brackets in inch.

## 2 Technical Data

The System Data of AC500-eCo apply ↗ Chapter 3 “System Data AC500-eCo” on page 7

Only additional details are therefore documented below.

### General Data

Power supply	24 VDC	100 - 240 VAC
Connection of power supply	Via removable 5-pin screw terminal	
Current consumption from power supply (max.)	PM554-TP: 180 mA PM554-TP-ETH: 190 mA PM554-RP: 220 mA PM556-TP-ETH: 190 mA PM564-TP: 210 mA PM564-TP-ETH: 220 mA PM564-RP: 240 mA PM564-RP-ETH: 250 mA PM566-TP-ETH: 220 mA	PM554-RP-AC: 200 mA at 100 VAC, 110 mA at 240 VAC *) PM564-RP-AC: 210 mA at 100 VAC, 125 mA at 240 VAC *) PM564-RP-ETH-AC: 220 mA at 100 VAC, 130 mA at 240 VAC *)

Power supply	24 VDC	100 - 240 VAC
Current consumption from power supply (typ.)	PM554-TP: 60 mA PM554-TP-ETH: 70 mA PM554-RP: 80 mA PM556-TP-ETH: 70 mA PM564-TP: 95 mA PM564-TP-ETH: 100 mA PM564-RP: 110 mA PM564-RP-ETH: 120 mA PM566-TP-ETH: 100 mA	PM554-RP-AC: 20 mA at 100 VAC, 12 mA at 240 VAC *) PM564-RP-AC: 20 mA at 100 VAC, 11 mA at 240 VAC *) PM564-RP-ETH-AC: 23 mA at 100 VAC, 14 mA at 240 VAC *)
Inrush current at nominal voltage	Typ. 3.9 A <sup>2</sup> s	Typ. 0.3 A <sup>2</sup> s
Required fuse	3 A fast	Max. 10 A
Max. power dissipation within the processor module	PM554-TP: 3.0 W PM554-TP-ETH: 3.3 W PM554-RP: 3.5 W PM556-TP-ETH: 3.3 W PM564-TP: 3.9 W PM564-TP-ETH: 4.4 W PM564-RP: 4.5 W PM564-RP-ETH: 4.9 W PM566-TP-ETH: 4.4 W	PM554-RP-AC: 4.8 W PM564-RP-AC: 4.8 W PM564-RP-ETH-AC: 5.3 W
Processor module interfaces	I/O bus, COM1, COM2 (optional), Ethernet (depending on model)	
Connection system	see System Assembly, Construction and Connection	
Weight	PM554-TP: 300 g PM554-TP-ETH: 300 g PM554-RP: 350 g PM556-TP-ETH: 300 g PM564-TP: 300 g PM564-TP-ETH: 300 g PM564-RP: 350 g PM564-RP-ETH: 350 g PM566-TP-ETH: 300 g	PM554-RP-AC: 400 g PM564-RP-AC: 400 g PM564-RP-ETH-AC: 400 g
Mounting position	horizontal or vertical	

\*) These values show the value of the apparent current (sum of active and reactive current)

#### Detailed Data

Program memory	128 kB Flash EPROM (PM554-xP and PM564-xP types) 512 kB Flash EPROM (PM556-xP and PM566-xP types)
Data memory	
- VAR data	10 kB

- VAR_RETAIN data	1 kB, always buffered in flash
- %RB data (persistent)	1 kB, can be buffered in flash (depending on configuration)
- %MB data	2 kB (PM554 and PM564 types) 64 kB (PM556 and PM566 types)
Data buffering	In flash memory
Real time clock (RTC)	Optional
Battery low indication	Warning
Programming languages	- Instruction List (IL) - Function Block Diagram (FBD) - Ladder Diagram (LD) - Sequential Function Chart (SFC) - Structured Text (ST) - Continuous Function Chart (CFC)
Cycle time for 1000 instructions	
Binary	0.08 ms
Word	0.1 ms
Floating point	1.2 ms
Program execution	
Cyclic	Yes
Time-controlled	Yes
Multitasking	Yes
Interruption	1 interrupted with up or down edge detection
LEDs	Power, Run, Error, Status of I/Os
RUN/STOP switch	Yes
Protection of the user program by password	Possible
Usable accessories	MC503: Memory card TA561-RTC: Real time clock TA562-RS: Serial RS485 TA569-RS-ISO: Serial RS485 isolated TA562-RS-RTC: Real time clock and serial RS485

#### Detailed data of the interfaces

<b>Serial interface COM1</b>	
Physical link	RS-485
Electrical isolation	none
Baudrate	Configurable from 1.2 to 187.5 kBit/s
Connection	9-pin D-sub female connector

<b>Serial interface COM1</b>	
Common mode range	Typ. -8 V / +12 V (CAUTION: The interface can be damaged if the signal exceeds the common mode range.)
Usage	- Programming port - Modbus (master and slave) - Serial ASCII communication - CS31 (master only)

<b>Serial interface COM2 (optional)</b>	
Physical link	RS-485
Electrical isolation	none (TA562-RS or TA562-RS-RTC) 500 VDC (TA569-RS-ISO)
Baudrate	Configurable from 1.2 to 115.2 kBit/s
Connection	Removable 5-pin terminal block
Common mode range	Typ. -8 V / +12 V (CAUTION: The interface can be damaged if the signal exceeds the common mode range.)
Usage	- Programming port - Modbus (master and slave) - Serial ASCII communication

#### Data of I/Os

	<b>PM55x-xP</b>	<b>PM56x-xP</b>
Max. number of I/O modules	10	10
Digital inputs	320 + 8	320 + 8
Digital outputs	240 + 6	240 + 6
Type of digital outputs	PM554-TP PM554-TP-ETH PM554-RP PM554-RP-AC PM556-TP-ETH PM564-TP PM564-TP-ETH PM564-RP PM564-RP-AC PM564-RP-ETH PM564-RP-ETH-AC PM566-TP-ETH	Transistor Transistor Relays Relays Transistor Transistor Transistor Relays Relays Relays Relays Transistor
Analog inputs	160	160 + 2
Analog outputs	160	160 + 1

	PM55x-xP	PM56x-xP
Number of decentralized inputs and outputs	On CS31 Bus: up to 31 stations with up to 120 digital inputs / 120 digital outputs each	
Detailed data of the onboard I/O	Onboard I/Os in PM55x and Onboard I/Os in PM56x	

**No effects of multiple overloads**

No effects of multiple overloads on isolated multi-channel modules occur, as every channel is protected individually by an external fuse.

## 3 System Data AC500-eCo

### 3.1 Environmental Conditions

Table 2: Process and Supply Voltages

Parameter	Value
24 VDC	
Voltage	24 V (-15 %, +20 %)
Protection against reverse polarity	Yes
100 VAC	
Voltage	100 V (-15 %, +10 %)
Frequency	50/60 Hz (-6 %, +4 %)
230 VAC	
Voltage	230 V (-15 %, +10 %)
Frequency	50/60 Hz (-6 %, +4 %)
100...240 VAC wide range supply	
Voltage	100 V...240 V (-15 %, +10 %)
Frequency	50/60 Hz (-6 %, +4 %)
Allowed interruptions of power supply, according to EN 61131-2	
DC supply	Interruption < 10 ms, time between 2 interruptions > 1 s, PS2
AC supply	Interruption < 0.5 periods, time between 2 interruptions > 1 s



**NOTICE!**

Exceeding the maximum power supply voltage (> 30 VDC) for process or supply voltages could lead to unrecoverable damage of the system. The system could be destroyed.

Parameter	Value
Temperature	
Operating	0 °C...+60 °C (horizontal mounting of modules) 0 °C...+40 °C (vertical mounting of modules and output load reduced to 50 % per group)
Storage	-40 °C...+70 °C
Transport	-40 °C...+70 °C

Parameter	Value
Humidity	Max. 95 %, without condensation
Air pressure	
Operating	> 800 hPa / < 2000 m
Storage	> 660 hPa / < 3500 m

### 3.2 Creepage Distances and Clearances

The creepage distances and clearances meet the requirements of the overvoltage category II, pollution degree 2.

### 3.3 Insulation Test Voltages, Routine Test

According to EN 61131-2

Parameter	Value	
200 V...240 V circuits against other circuitry	2500 V	1.2/50 $\mu$ s
100 V...127 V circuits against other circuitry	1500 V	1.2/50 $\mu$ s
100 V...240 V circuits against other circuitry	2500 V	1.2/50 $\mu$ s
24 V circuits (supply, 24 V inputs/outputs, analogue inputs/outputs), if they are electrically isolated against other circuitry	500 V	1.2/50 $\mu$ s
COM interfaces, electrically isolated	500 V	1.2/50 $\mu$ s
COM interfaces, electrically not isolated	Not applicable	Not applicable
FBP interface	500 V	1.2/50 $\mu$ s
Ethernet	500 V	1.2/50 $\mu$ s
ARCNET	500 V	1.2/50 $\mu$ s
200 V... 240 V circuits against other circuitry	1350 V	AC 2 s
100 V circuits against other circuitry	820 V	AC 2 s
100 V...240 V circuits against other circuitry	1350 V	AC 2 s
24 V circuits (supply, 24 V inputs/outputs, analogue inputs/outputs), if they are electrically isolated against other circuitry	350 V	AC 2 s
COM interfaces, electrically isolated	350 V	AC 2 s



Parameter	Value	
COM interfaces, electrically not isolated	Not applicable	Not applicable
FBP interface	350 V	AC 2 s
Ethernet	350 V	AC 2 s
ARCNET	350 V	AC 2 s

### 3.4 Power Supply Units

For the supply of the modules, power supply units according to PELV specifications must be used.

### 3.5 Electromagnetic Compatibility

Electromagnetic Compatibility		
Device suitable for:		
	Industrial applications	Yes
	Domestic applications	No
<b>Immunity against electrostatic discharge (ESD):</b>		According to IEC 61000-4-2, zone B, criterion B
	Electrostatic voltage in case of air discharge	8 kV
	Electrostatic voltage in case of contact discharge	4 kV, in a closed switch-gear cabinet 6 kV <sup>1)</sup>
	ESD with communication connectors	In order to prevent operating malfunctions, it is recommended, that the operating personnel discharge themselves prior to touching communication connectors or perform other suitable measures to reduce effects of electrostatic discharges.
<b>Immunity against the influence of radiated (CW radiated):</b>		According to IEC 61000-4-3, zone B, criterion A
	Test field strength	10 V/m
<b>Immunity against transient interference voltages (burst):</b>		According to IEC 61000-4-4, zone B, criterion B
	Supply voltage units (DC)	2 kV
	Supply voltage units (AC)	2 kV
	Digital inputs/outputs (24 VDC)	1 kV
	Digital inputs/outputs (120 VAC...2400 VAC)	2 kV
	Analog inputs/outputs	1 kV
	CS31 system bus	1 kV
	Serial RS-485 interfaces (COM)	1 kV
	Serial RS-232 interfaces (COM, not for PM55x and PM56x)	1 kV
	ARCNET	1 kV
	FBP	1 kV
	Ethernet	1 kV

<b>Electromagnetic Compatibility</b>		
	I/O supply, DC-out	1 kV
<b>Immunity against the influence of line-conducted interferences (CW conducted):</b>		According to IEC 61000-4-6, zone B, criterion A
	Test voltage	3 V zone B, 10 V is also met.
	High energy surges	According to IEC 61000-4-5, zone B, criterion B
	Power supply AC	2 kV CM / 1 kV DM <sup>2)</sup>
	Power supply DC	1 kV CM / 0.5 kV DM <sup>2)</sup>
	DC I/O supply, add. DC-supply-out	0.5 kV CM / 0.5 kV DM <sup>2)</sup>
	Buses, shielded	1 kV CM <sup>2)</sup>
	AC I/O unshielded	2 kV CM / 1 kV DM <sup>2)</sup>
	I/O analog, I/O DC unshielded	1 kV CM / 0.5 kV DM <sup>2)</sup>
	Radiation (radio disturbance)	According to IEC 55011, group 1, class A

<sup>1)</sup> High requirement for shipping classes are achieved with additional specific measures (see specific documentation).

<sup>2)</sup> CM = Common Mode, DM = Differential Mode

### 3.6 Mechanical Data

<b>Parameter</b>	<b>Value</b>
Mounting	Horizontal
Degree of protection	IP 20 (if all terminal screws are tightened)
Housing	Classification V-2 according to UL 94
Vibration resistance acc. to EN 61131-2	all three axes (DIN rail mounting) 5 Hz...8.4 Hz, continuous 3.5 mm 8.4 Hz...150 Hz, continuous 1 g
Shock test	All three axes 15 g, 11 ms, half-sinusoidal
Mounting of the modules:	
DIN rail according to DIN EN 50022	35 mm, depth 7.5 mm or 15 mm
Mounting with screws	Screws with a diameter of 4 mm
Fastening torque	1.2 Nm

### 3.7 Approvals and certifications

Information on approvals and certificates can be found in the corresponding chapter of the *Main catalog, PLC Automation*.

**abb.com/plc**

ABB Automation Products GmbH  
Eppelheimer Str. 82  
69123 Heidelberg, Germany

© Copyright 2017-2018 ABB.

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden.

Telephone: +49 (0)6221 701 1444  
Fax: +49 (0)6221 701 1382  
E-mail: [plc.support@de.abb.com](mailto:plc.support@de.abb.com)