


We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden.
ABB 09

On-load tap-changer type UCGL./C, VUCGL./C, 16 tap positions, linear switching.
Min. effective No. of turns in pos. 1.
The tap-changer is delivered set in pos. 8, the preceding pos. was 7.

Lindningskopplare typ UCGL./C, VUCGL./C, 16 lägen, linjär koppling.
Min antal effektiva varv i läge 1.
Lindningskopplaren levereras inställd i läge 8, föregående läge var 7.

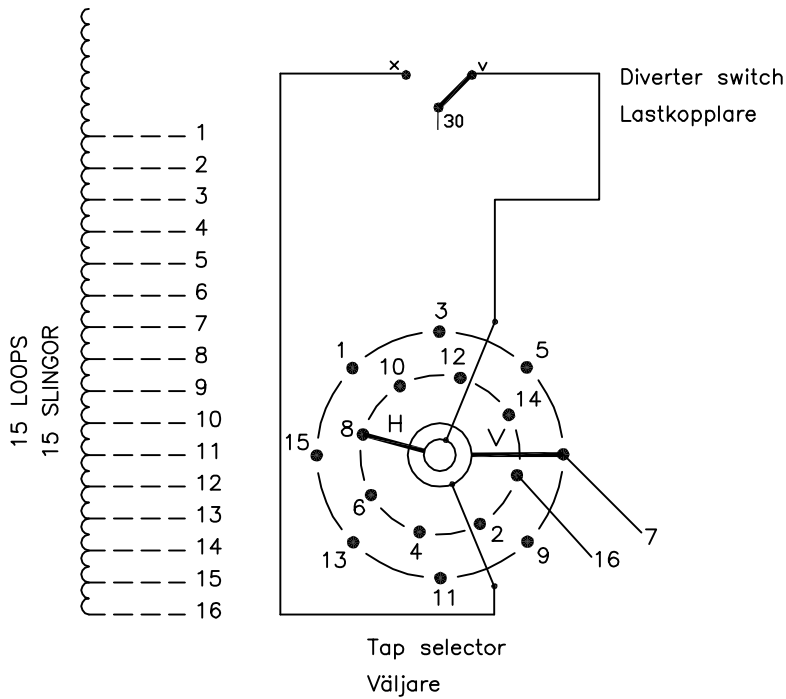

Pos. Läge	Tap selector and diverter switch connect	
1	1-V-x	30
2	2-H-v	
3	3-V-x	
4	4-H-v	
5	5-V-x	
6	6-H-v	
7	7-V-x	
8	8-H-v	
9	9-V-x	
10	10-H-v	
11	11-V-x	
12	12-H-v	
13	13-V-x	
14	14-H-v	
15	15-V-x	
16	16-H-v	

The tap-changer is shown in pos. 8, the preceding pos. was 7.
The tap selector is seen from above.
Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 8, föregående läge var 7.
Väljaren sedd uppifrån.
Kontaktarm V ligger över kontaktarm H.

Continuous lines show leads included in the tap-changer. Dashed lines show leads belonging to the cleats and leads.

Heldragna linjer visar ledare som ingår i lindningskopplaren. Streckade linjer visar ledare som tillhör anslutningsdonet.

Drawn by	Form No.	Sheet	
	Design checked by	Year	Week
	Revind	Dept	Cont
	A B B		

Accepted by qual control L Oberg	Accepted for prod by M Häggmar	Description (English) CONNECTION DIAGRAM	DATAORIGINAL
Design checked by H Sundberg	Drawn by C Arnborg	Description (own language) KOPPLINGSSHEMA	File name 0376-12
Drawing checked by P Sundqvist	Issued by Dept Year Week CO/TKD 09 37	54920376-12	
A B B Asea Brown Boveri			
		RevInd	Cont -