


We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © ABB '19

On-load tap-changer type (V)UCGR./F, (V)UCLR./F, UCCR./F,
 11 tap positions, plus/minus switching.
 Min. effective No. of turns in pos. 1.
 The tap-changer is delivered set in pos. 6,
 the preceding pos. was 5.

Lindningskopplare typ (V)UCGR./F, (V)UCLR./F, UCCR./F,
 11 lägen, plus/minus koppling.
 Min antal effektiva varv i läge 1.
 Lindningskopplaren levereras inställd i läge 6,
 föregående läge var 5.

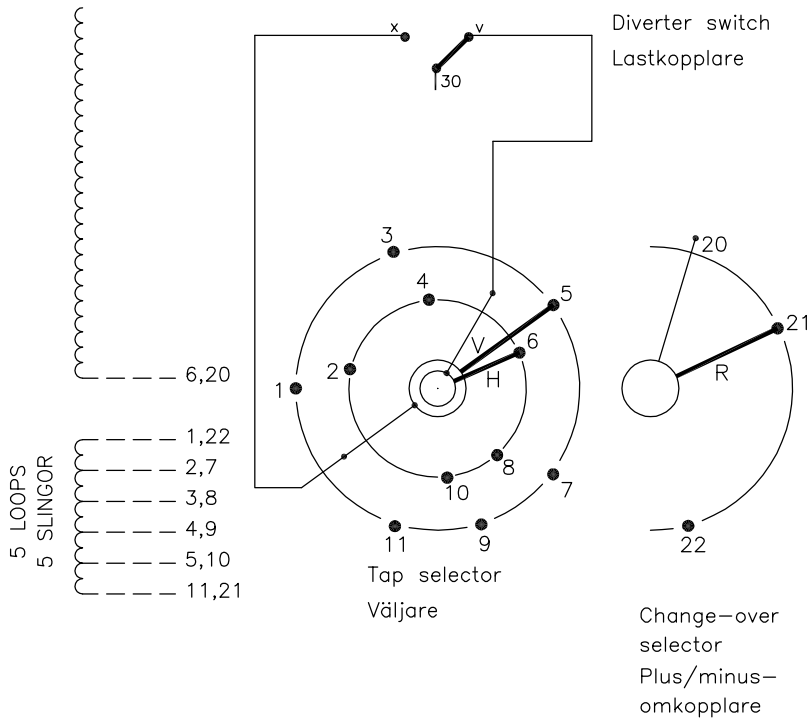

Pos. Läge	R connects in direction R förbinder i riktning		Tap selector and diverter switch connect Väljaren och lastkopplaren förbinder	
1	20-21 ↓	20-21 ↑	1-V-x	30
2			2-H-v	
3			3-V-x	
4			4-H-v	
5			5-V-x	
6	6-H-v			
7	20-22 ↓	20-22 ↑	7-V-x	
8			8-H-v	
9			9-V-x	
10			10-H-v	
11			11-V-x	

The tap-changer is shown in pos. 6,
 the preceding pos. was 5.
 The tap selector and the change-over selector
 are seen from above.
 Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 6,
 föregående läge var 5.
 Väljaren och plus/minus-omkopplaren sedda uppifrån.
 Kontaktarm V ligger över kontaktarm H.

Continuous lines show leads included in the
 tap-changer. Dashed lines show leads belonging
 to the cleats and leads.

Heldragna linjer visar ledare som ingår i
 lindningskopplaren. Streckade linjer visar
 ledare som tillhör anslutningsdonet.

Sheet	Cont									
	Year	Week	Dept	Rev Ind	Revision	Appd	Year	Week		
	Design checked by	L. Oberg		Accepted for prod by		M. Haggmar		Description (English)		
	Drawn by	H. Sundberg		Drawn by		A. Wang		Description (own language)		
Design checked by	N. Gustavsson		Issued by Dept		Year	Week	KOPPLINGSSHEMA		File name	
1ZSC004310-AAB		Lang	Sheet							
Rev Ind		Cont								