

Technical data 2CDC513072D0201

ABB i-bus[®] KNX Keypad for GM/A 8.1, SM BT/A 1.1, 2CDG280001R0011



Product description

The BT/A 1.1 Keypad is used to operate and display the GM/A 8.1 KNX Security Panel. The display is used to show information about system states. The multifunction and special keys mean that all the system functions can be operated easily. Safety-relevant functions are protected by a user PIN.

The device can be used in systems with increased security requirements according to VdS Class A, B and C, DIN VDE 0833 Grade 1, 2, 3 and EN 50 131 / IEC 62 642 Grade 1, 2, 3.

ABB i-bus® KNX

Keypad for GM/A 8.1, SM

BT/A 1.1, 2CDG280001R0011

Technical data

Supply	Voltage	13.2 V DC + 0.5 V (via S-Bus 3)
	Current consumption	Max. 65 mA < 30 mA (typical)
Connection	Bus connection	S-Bus 3
	End of line resistor	120 Ohms (contained in scope of delivery of the panel)
Connection type	Type	Pluggable screw type terminals
	Connecting capacity	0.2...1.5 mm ² rigid/flexible
	Multi-wire connecting capacity	0.2...0.75 mm ² rigid/flexible
	Tightening torque	Max. 0.4 Nm
Operating and display elements	LED <i>Operation</i> (green)	Display of device operation readiness
	LED <i>Signal</i> (yellow)	Display of the triggered detector of the area
	LED <i>Fault</i> (yellow)	Display of a fault in the system/the area
	LED <i>Alarm</i> (red)	Display of alarm in the system/the area
	Multifunction keys	Recall the stored function in the display
	Number keys	Input of the PIN
	<i>Set</i> key	Setting of the system/the area
	<i>Unset</i> key	Unsetting of the system/the area
	<i>Reset</i> key	Reset alarms, faults and detectors saving alarms
<i>Menu</i> key	Recall the Keypad menu	
<i>Switch off acoustics</i> key	Switch off the acoustic signaling device	
Temperature range	Mode	-10 °C...+55 °C
	Transport	-25 °C...+70 °C
	Storage	-25 °C...+55 °C
Ambient conditions	Max. humidity	93 %, n condensation allowed
Mounting	Surface mounted device (AP)/Flush mounted device (UP)	
Design	Dimensions (H x W x D)	237 x 117 x 22 mm
	Enclosure, color	Plastic, RAL 9005 (jet black), halogen-free
Protection type	IP 30	To DIN EN 60 529
Protection class	II	To DIN EN 61 140
Environmental class	II	To DIN EN 50 130-5
Interference immunity	DIN EN 50 130-4	
Isolation category	Overvoltage category	III to EN 60 664-1
	Pollution degree	2 to DIN EN 60 664-1
Approvals	VdS 2252 DIN EN 50 131-3	Class C applied for Grade 3
CE conformity	In accordance with the EMC guideline and low voltage guideline, ROHS	

ABB i-bus® KNX Keypad for GM/A 8.1, SM BT/A 1.1, 2CDG280001R0011

Connection schematic

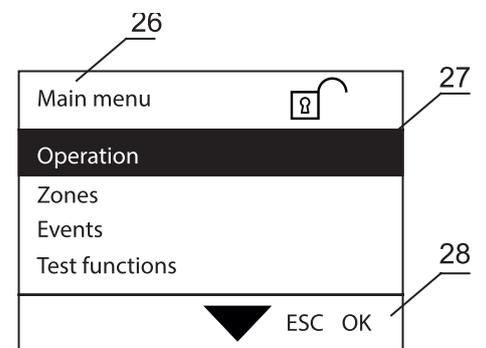
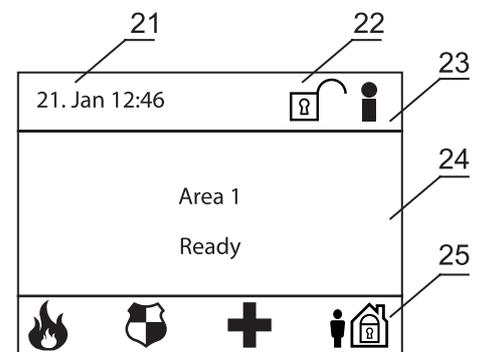
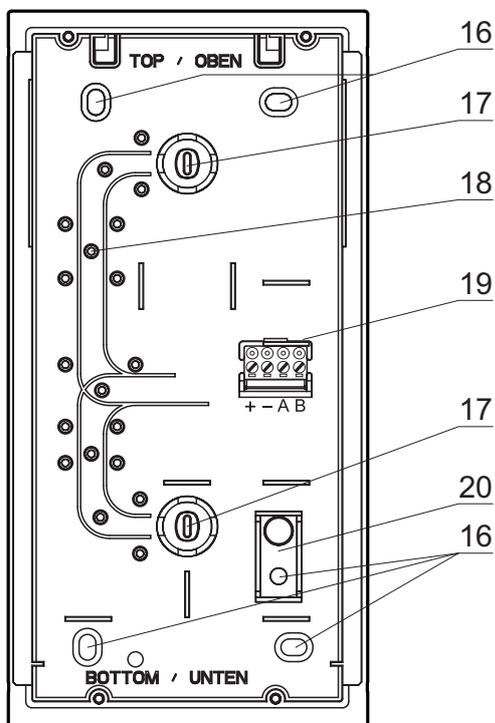
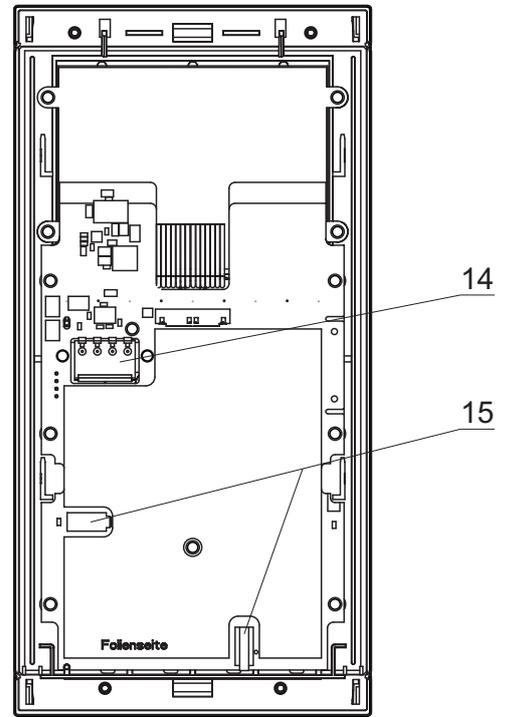
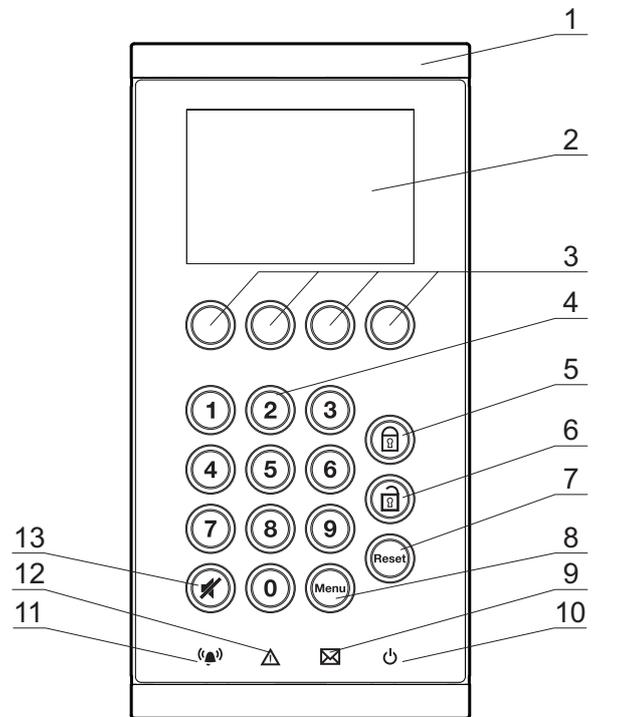



ABB i-bus® KNX Keypad for GM/A 8.1, SM BT/A 1.1, 2CDG280001R0011

Connection schematic (cont.)


1	Cover caps	15	Tamper contact
2	Display	16	Fixing holes
3	Multifunction keys	17	Cable entry point
4	Number keys	18	Strain relief
5	<i>Set</i> key	19	Bus connection, S-Bus 3
6	<i>Unset</i> key	20	Predetermined breaking point in enclosure for tamper detection
7	<i>Reset</i> key	21	Display of date and time
8	<i>Menu</i> key	22	Setting state of the system
9	LED <i>Message</i> (yellow)	23	Disable groups active
10	LED <i>Operation</i> (green)	24	Display area
11	LED <i>Alarm</i> (red)	25	Display area for functions of the multifunction keys
12	LED <i>Fault</i> (yellow)	26	Menu heading
13	<i>Switch off acoustics</i> key	27	Selection area
14	Contacting pins	28	Display area for functions of the multifunction keys

ABB i-bus® KNX
Keypad for GM/A 8.1, SM
BT/A 1.1, 2CDG280001R0011

Dimension drawing (front view)

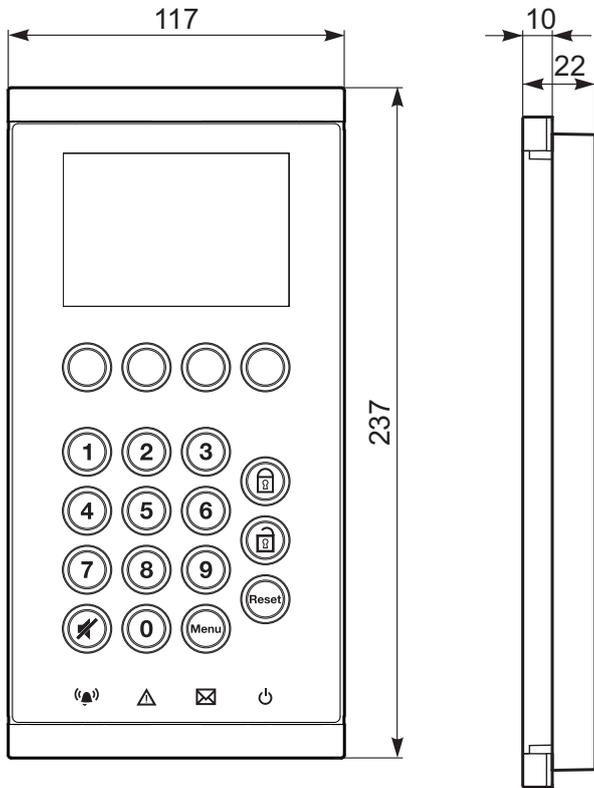

Dimension drawing (rear view)

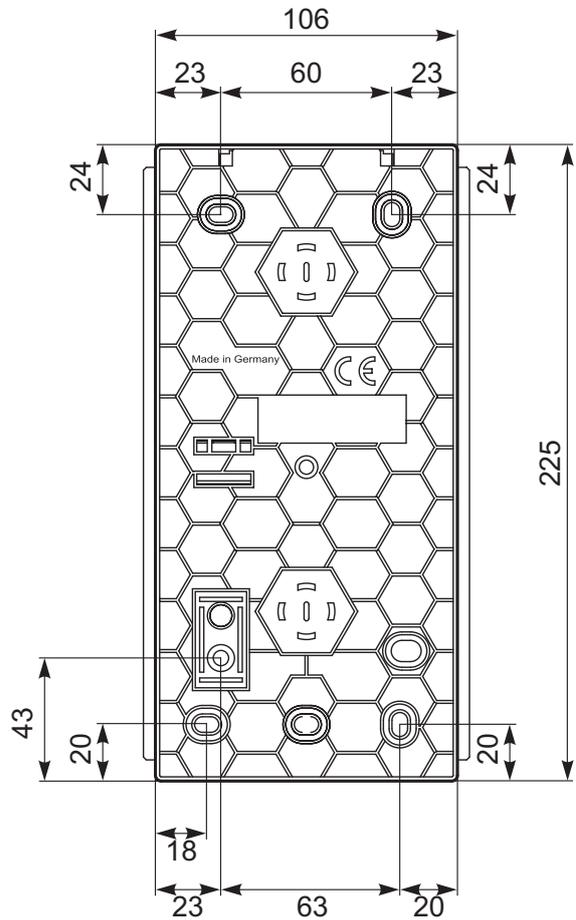

Contact

ABB STOTZ-KONTAKT GmbH

Eppelheimer Straße 82

69123 Heidelberg, Germany

Telefon: +49 (0)6221 701 607

Telefax: +49 (0)6221 701 724

E-Mail: knx.marketing@de.abb.com

Further information and local contacts:

www.abb.com/knx

Note:

We reserve the right to make technical changes or modify the contents of this document without prior notice.

The agreed properties are definitive for any orders placed. ABB AG shall not be liable for any consequences arising from errors or incomplete information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Reproduction, transfer to third parties or processing of the content – including sections thereof – is not permitted without prior expressed written permission from ABB AG.

Copyright© 2015 ABB

All rights reserved