

ABB Automation & Power World: April 18-21, 2011

WCS-120-1 (presentation code)

Three easy steps to sizing motors and drives


Automation & Power World 2011

April 18-21, 2011 in Orlando, Florida



Automation & Power World 2011

April 18-21, 2011 in Orlando, Florida

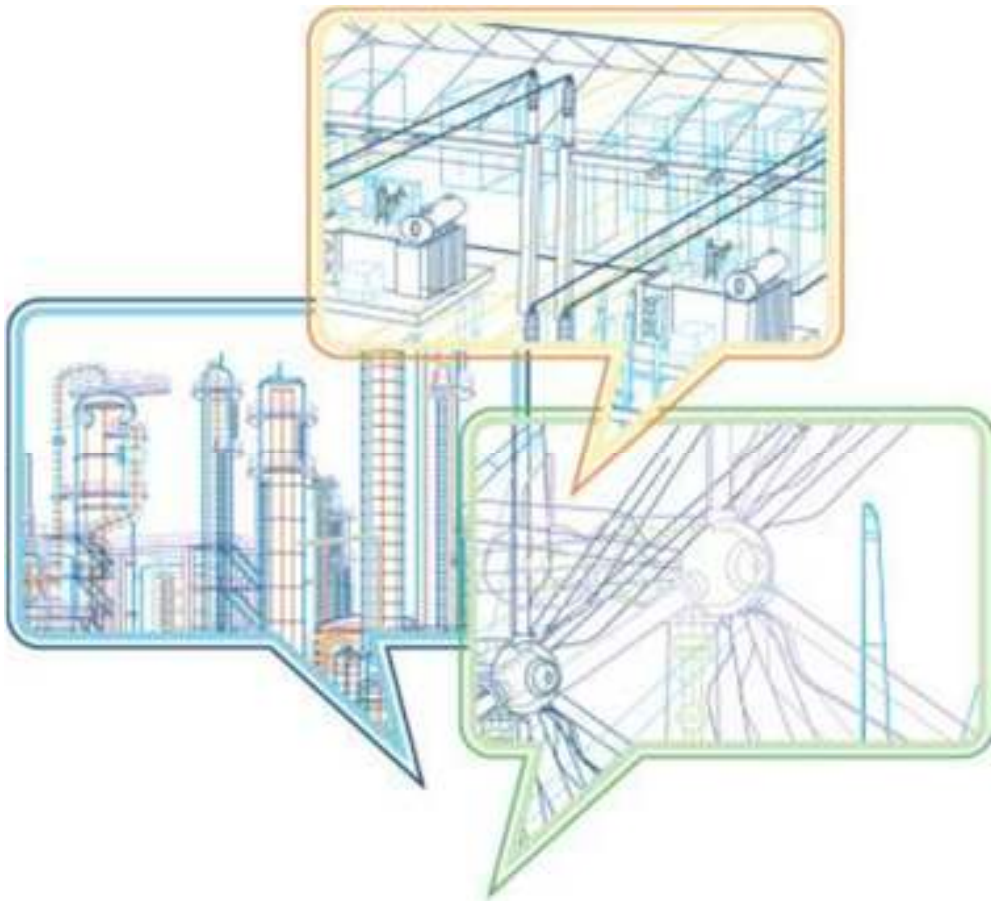

- Save the date for this “must attend” event!
- April 18-21, 2011
- Orlando World Center Marriott, Florida
- Over 400 hours of educational training
 - Business forum
 - Customer case studies
 - Hands-on training
 - Panel discussions
 - Technical workshops
- Earn PDHs and CEUs
- Technology & Solution Center
 - Over 70,000 sq. ft. of exhibits
- Network with your peers
- www.abb.com/a&pworld

ABB Automation & Power World

At-a-glance

400+

Educational workshops

Automation & Power World offers over 400 hours of educational workshops specifically designed to make engineers, maintenance and management more valuable to their companies.

70K

Technology & Solution Center

Over 1 ½ acres (70,000 ft²) of with nearly 100 tons of electrical gear and 100's of experts ready to answer any of your questions and share the future of Automation & Power Solutions.

4,000

Connect with peers

With over 4,000 of your peers in attendance, this is a powerful opportunity to network and learn from the industry. In addition, over 45 customers will be sharing their own case studies.

Educational workshops developed for all audiences

Just a few examples

Roles

Engineering

Management

Maintenance

Company types

Industrials

EPCs

Utilities

OEMs

- 📄 The coming wave of process safety system migration
- 📄 Implementing an alarm management strategy for a 100,000 I/O system - Case study
- 📄 Replacement and retrofit of large motors: Challenges and solutions
- 📄 Dynamic studies for large scale renewable energy integration at a Texas CREZ - Case study
- 📄 Secure commissioning of your process plant - Case study
- 📄 New arc flash mitigation technologies and techniques for a safer working environment
- 📄 Robotics 101
- 📄 A better approach to non-revenue water loss
- 📄 Electric vehicles: Are they real this time?
- 📄 Why is SIL more important than architecture?

Past attendees input



“I am impressed with the different parts of the program, the workshops and also the exhibit set-up... there is a lot of information to pick up.”

Duane Souers, Georgia Pacific

“It’s a great opportunity to get a lot of exposure to people and products in one week.”

Pardeep Gill, Alcoa



“It is well worth the time given the opportunities to: learn from industry experts, network with peers in the same industry, learn about emerging technologies, and build excellent supplier relationships.”

Sanjin Osmancevic, National Grid

WCS-120-1 (presentation code)

Three easy steps to sizing motors and drives

- Speaker name: Steve Weingarth
- Speaker title: Director, Application Eng.
- Company name: ABB, Inc
- Location: New Berlin, WI

Drive and motor sizing made easy

- Size your drive and motor in three easy steps
 - Determine the application requirements
 - Size the motor to meet the application
 - Size the drive to meet the motor and the application




Determine the application requirements

- What are the torque requirements?
 - Motor torque (not power) is usually the decisive factor
 - Torque requirement establishes current requirement
 - Continuous torque requirements
 - Variable torque vs. constant torque
 - Intermittent (peak) torque requirements
 - Starting torque
 - Acceleration torque
- What is the speed requirement?
 - Maximum speed
 - Minimum speed

Torque, what is it?

- A measure of the effect of a force applied at a distance to an axis
 - Torque is a force that tends to rotate or turn things
 - $\text{Torque (lb-ft)} = \text{Force (lb)} \times \text{Radius (ft)}$

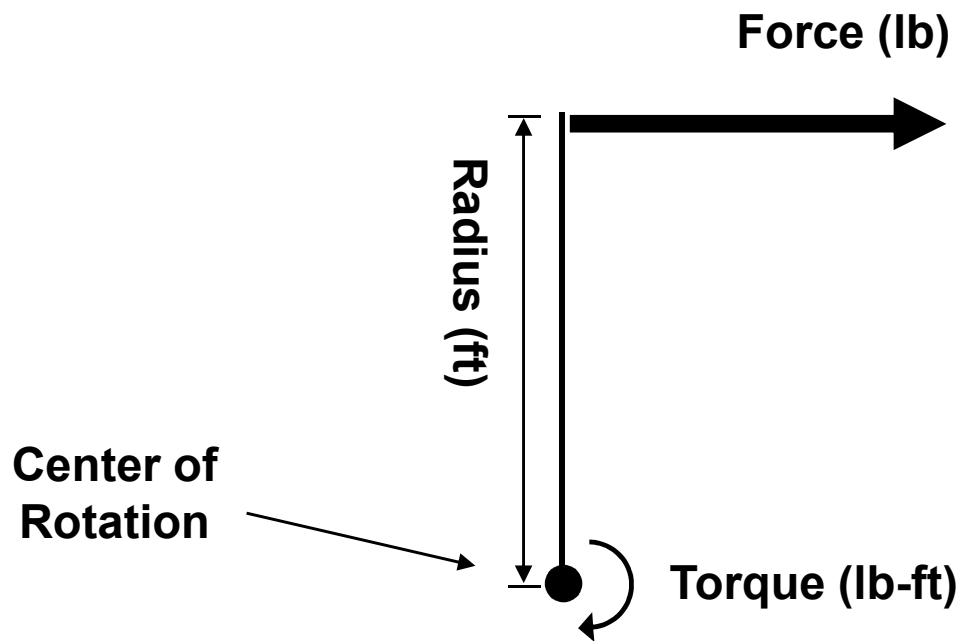


Variable torque

- Variable torque changes as the operating speed changes
 - Fans
 - Centrifugal pumps
 - Centrifugal blowers
 - Mixers (material dependent)




Variable torque (fan with no static head)

Variable torque

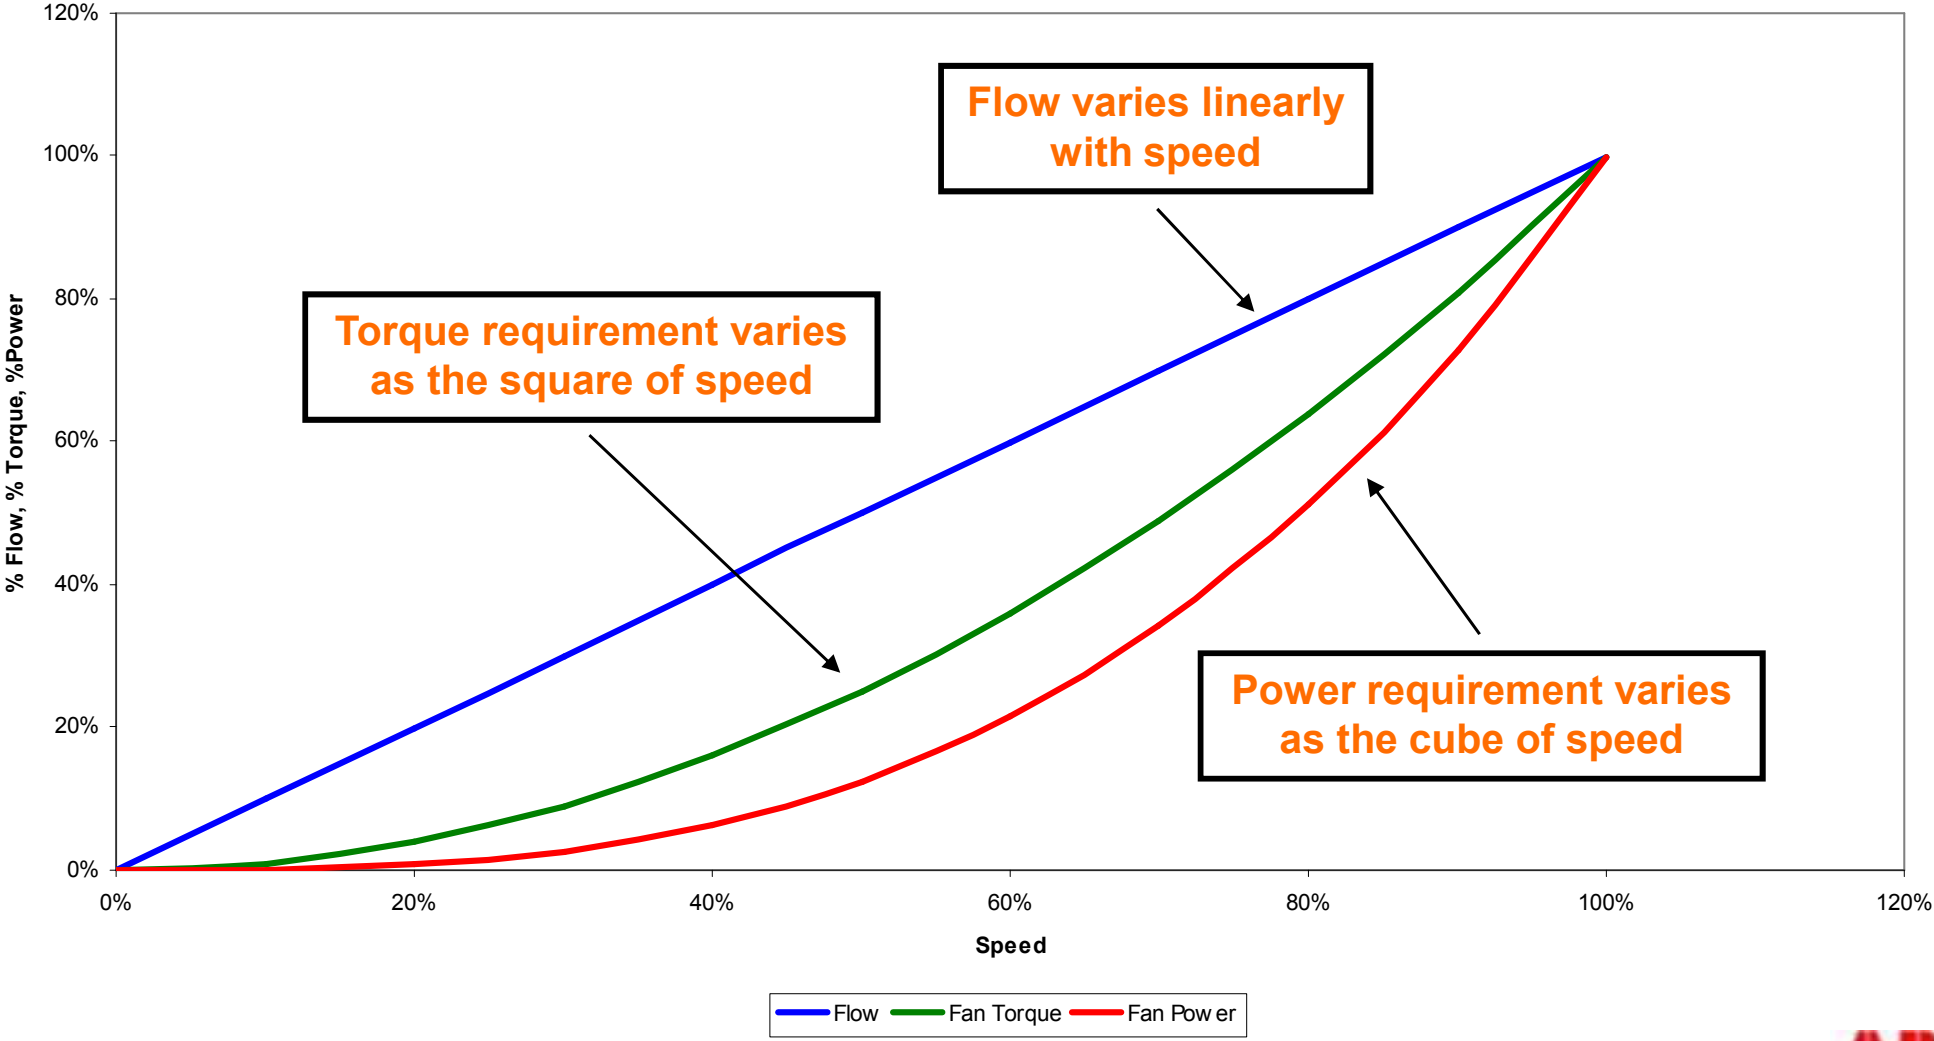

Variable torque (pump with static head)

Variable torque

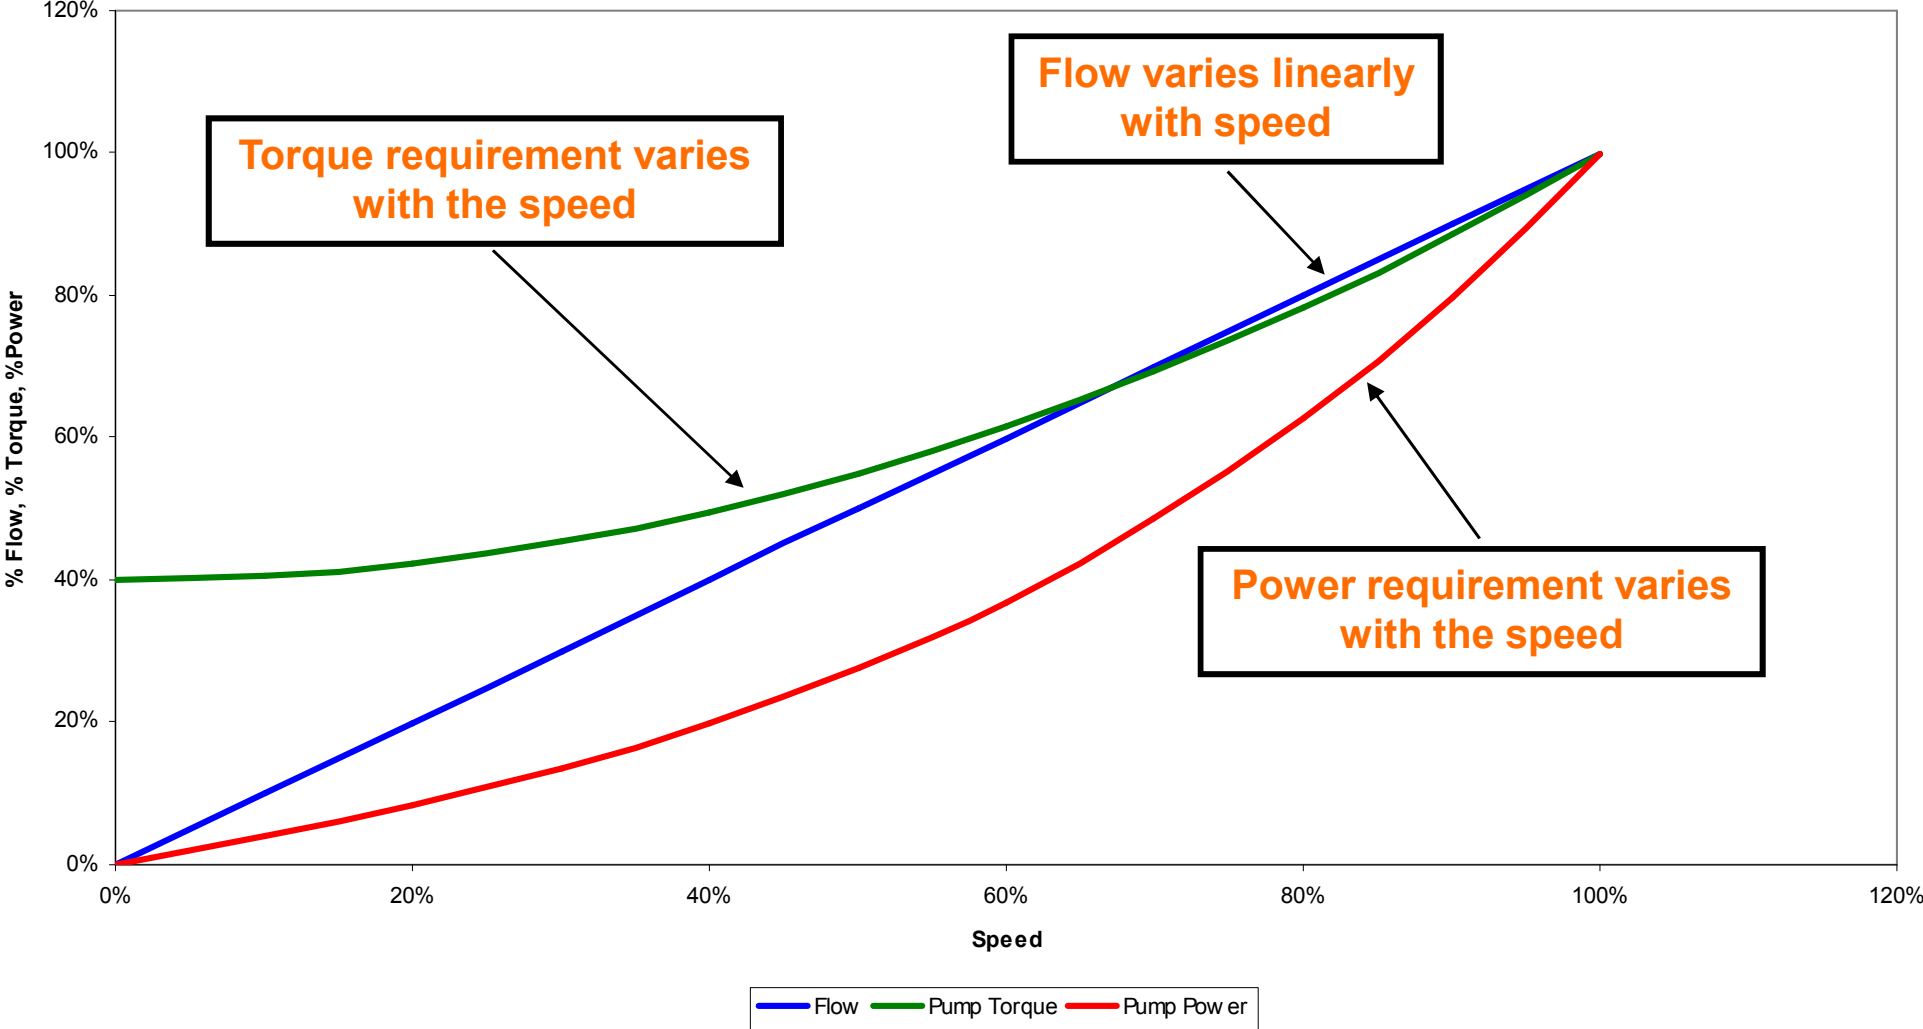


Constant torque

- Constant torque remains the same as the speed changes
 - Conveyers
 - Positive displacement pumps
 - Extruders
 - Crushers
 - Mixers (material dependent)
 - Rotary kilns
 - Hoists
 - Elevators



Constant torque

Constant torque

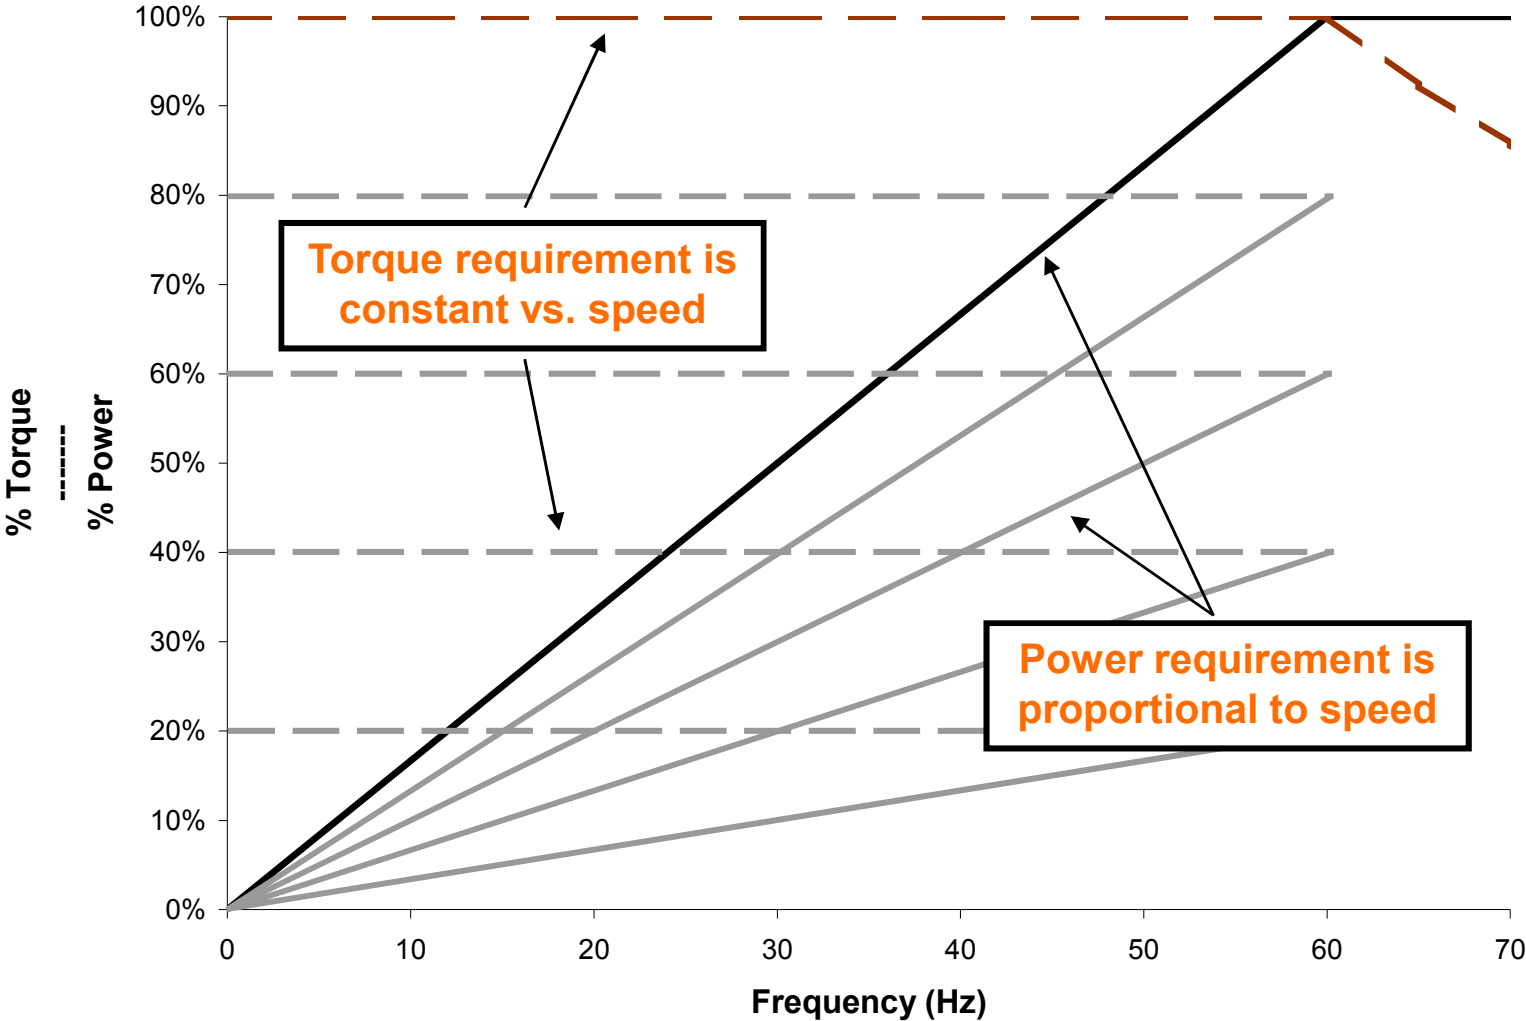


Constant Vs. variable torque

- Why should I care?
- Isn't all torque the same?
- Yes. But
 - Motor current is proportional to torque
 - Motor heating is proportional to current
 - In the case of a TEFC motor, cooling is proportional to speed
- Result --- **a TEFC motor's ability to thermally handle torque varies with speed**
- A **constant torque load often requires a larger TEFC motor** than that required for an equivalent variable torque load
 - Alternative is a separately driven fan, TEBC motor

TEFC motor torque

TEFC motor

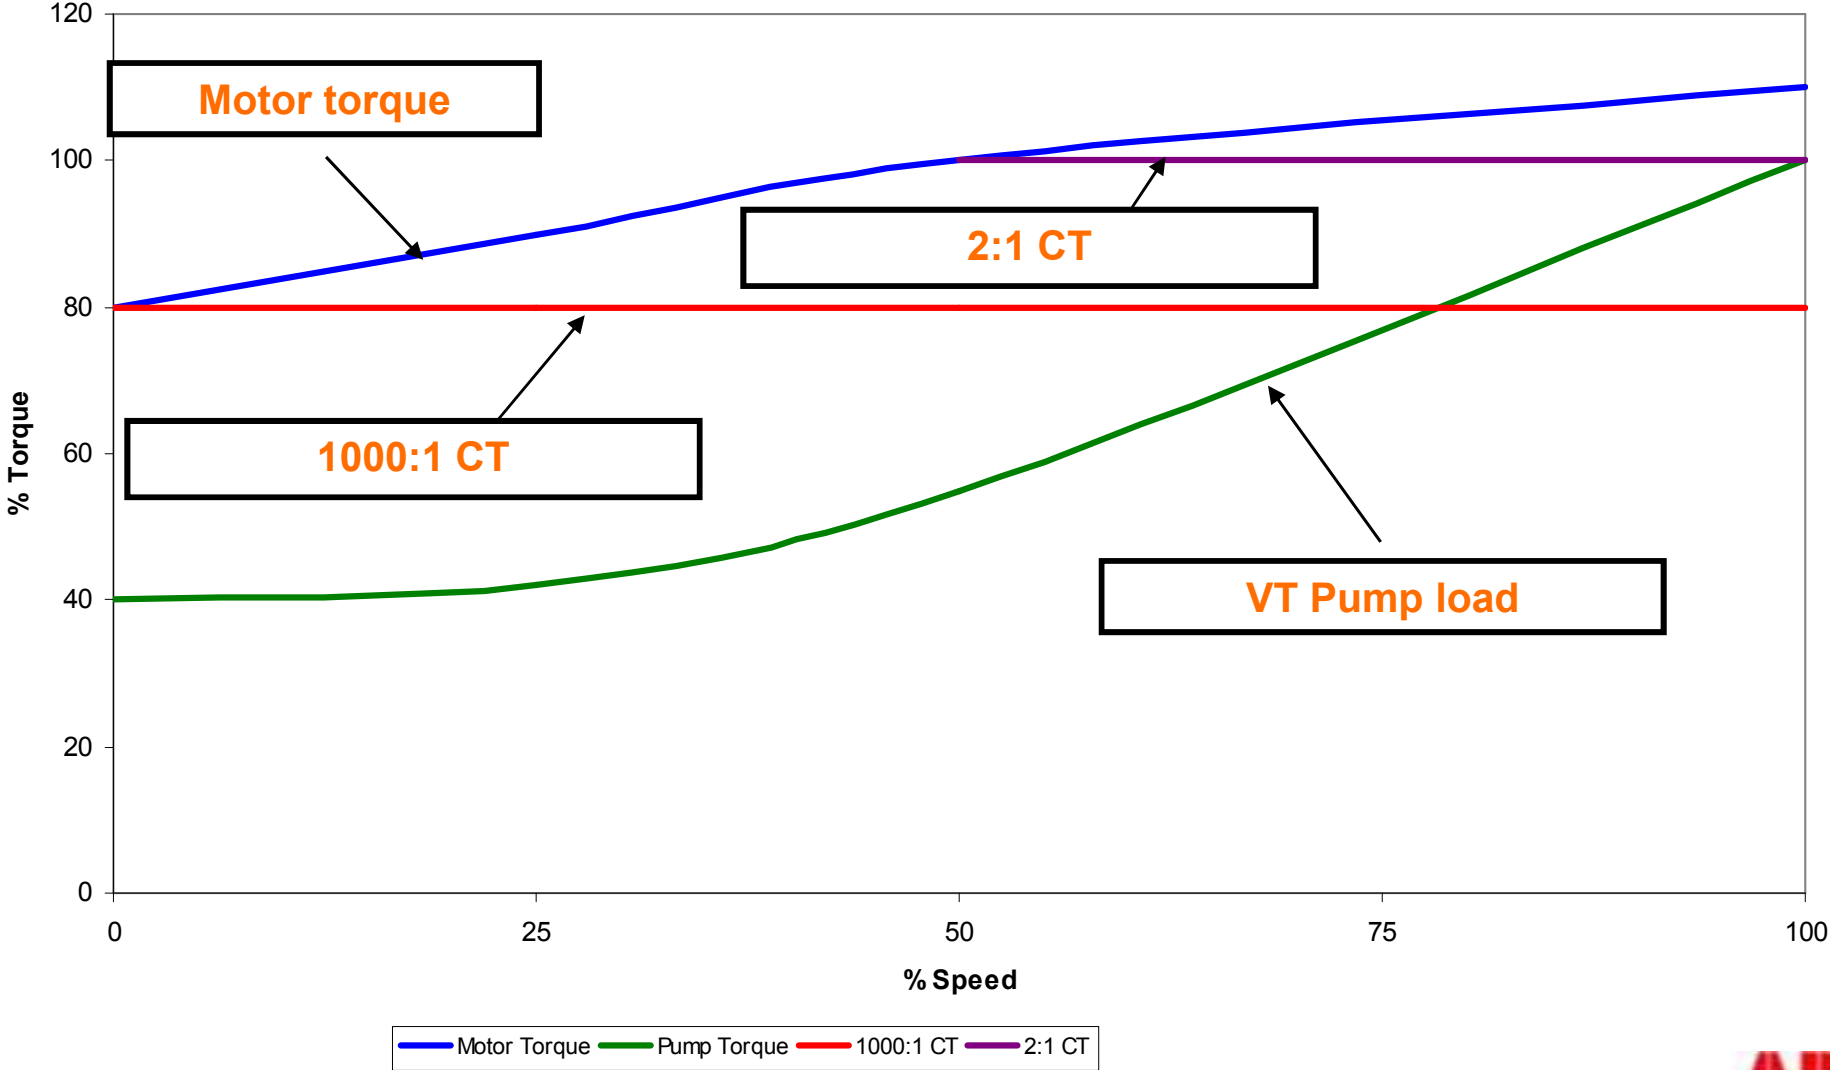


Intermittent torque

- Intermittent torque is torque that is required for a relatively short period of time. Examples:
 - Torque to breakaway the load and start motion
 - Friction
 - Torque to accelerate the load
 - Inertia


Torque example

- Torque (lb-ft) = F (lb) x r (ft)

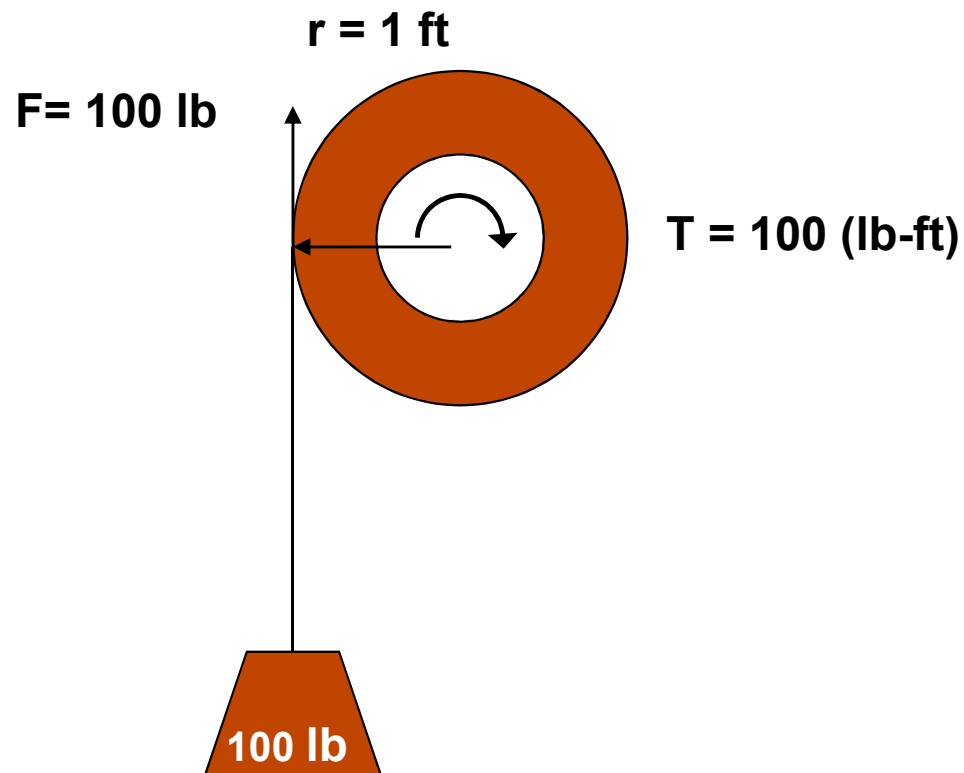


Speed

- With direct mechanical drive, motor speed is determined by mechanical speed and physical dimensions
- Speed (RPM) = v (ft/min) / (r (ft) $\times 2 \times \pi$)

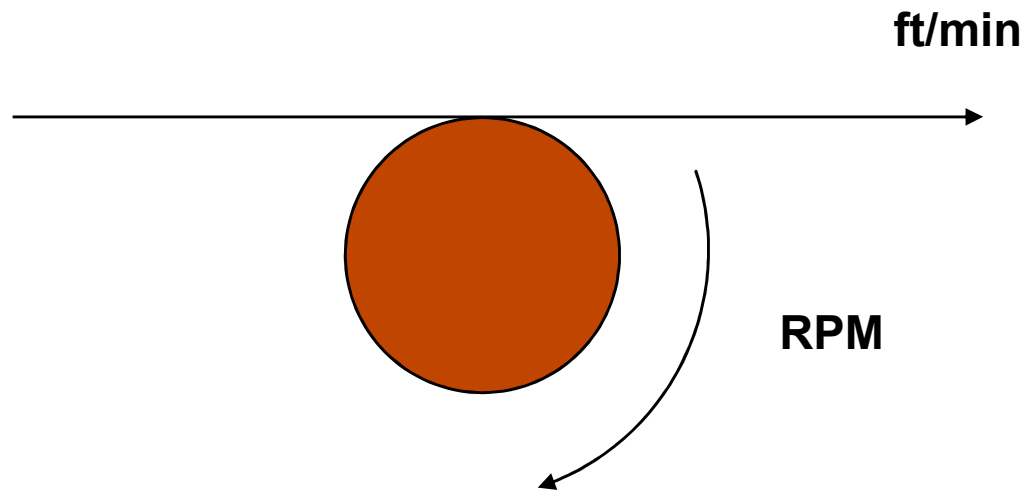

Speed example

- Speed (RPM) = $v(\text{ft}/\text{min}) / (r(\text{ft}) \times 2 \times \pi)$
- Speed (RPM) = $750(\text{ft}/\text{min}) / (1 \text{ (ft)} \times 2 \times \pi) = 119 \text{ (RPM)}$

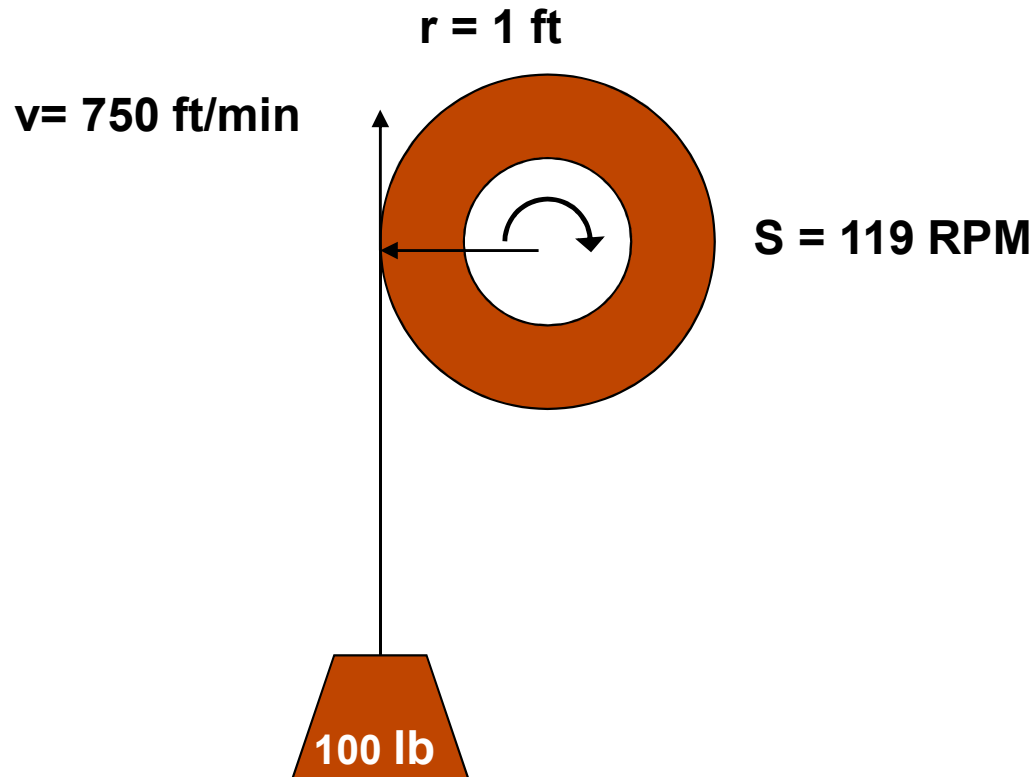

Power

- Power is the product of torque times speed
 - $\text{Power (HP)} = \text{Torque (lb-ft)} \times \text{Speed (RPM)} / 5252$
 - For our example:
 - Torque = 100 lb-ft
 - Speed = 119 RPM
 - $\text{Power} = 100 \text{ (lb-ft)} \times 119 \text{ (RPM)} / 5252 = 2.3 \text{ HP}$

Motor sizing

- In our example
 - Torque = 100 lb-ft
 - Speed = 119 RPM
 - Power = $100 \times 119 / 5252 = 2.3$ HP
- What size motor do we pick?
 - 3 HP @ 1790 RPM?
 - 40 HP @ 1790 RPM?

HP	Base Speed	Rated Torque
3	1790	9
5	1790	15
7.5	1790	22
10	1790	29
15	1790	44
30	1790	88
40	1790	117

A motor only develops its nameplate power at its nameplate speed. At a reduced speed it develops a proportionately reduced power.

Motor sizing

HP	Base Speed	Rated Torque
3	1790	9
5	1790	15
7.5	1790	22
10	1790	29
15	1790	44
30	1790	88
40	1790	117

- What if we add a gear box?
 - Torque at motor = torque / gear ratio
 - Speed at motor = speed x gear ratio
- Now what motor do we pick?

Gear Ratio	1	2	5	10	15
Torque at motor (lb-ft)	100	50	20	10	6.7
Speed at motor (RPM)	119	239	597	1194	1790

Intermittent torque

- Torque for Acceleration
 - Torque = Inertia x Acceleration rate
 - If you know:
 - Inertia (WK2) in lb-ft²
 - Acceleration time in sec.
 - Change in motor speed in RPM
 - Then:
 - Torque = WK2 (lb-ft²) x Speed(RPM) / (Accel time(sec.) x 307.6)

Intermittent torque

- Torque for Acceleration
 - Assume for our example:
 - Total $WK^2 = 1.2 \text{ lb-ft}^2$
 - Includes 100 lb load, drum, 15:1 gear box and motor
 - Change in speed is 1790 RPM
 - If accel time is 10 seconds
 - Accel Torque = $1.2(\text{lb-ft}^2) \times 1790(\text{RPM}) / (10(\text{sec.}) \times 307.6)$
 - Accel Torque = 0.7(lb-ft)
 - Total torque = $6.7 + 0.7 = 7.4 \text{ lb-ft}$; less than rated motor torque
 - If accel time = 1 second
 - Accel Torque = $1.2(\text{lb-ft}^2) \times 1790(\text{RPM}) / (1(\text{sec.}) \times 307.6)$
 - Accel Torque = 7.0 (lb-ft)
 - Total torque = $6.7 + 7.0 = 13.7 \text{ lb-ft}$, 150% of rated motor torque

Pick a drive

- Assume for our example:
 - Motor is 3 HP, 1790 rpm, 4.2 FLA, 9 lb-ft
 - Torque to lift load and accel in 10 s is 7.4 lb-ft
 - Max current is less than 4.2 amps
 - Use 3 HP normal duty drive, 4.9 amps, with 110% O.L. (5.4 amps peak)
 - Torque to lift load and accel in 1 s is 13.7 lb-ft
 - Max current is about 6.4 amps
 - Use 3 HP heavy duty drive, 5.6 amps, with 150% O.L. (8.4 amps peak)

Sample rating table

ACS800-U1 size	I_{\max} A	Normal use		Heavy-duty use		Frame size	Air flow ft ³ /min	Heat dissipation BTU/Hr
		I_{2N} A	P_N HP	I_{2hd} A	P_{hd} HP			
Three-phase supply voltage 208 V, 220 V, 230 V or 240 V								
-0002-2	8.2	6.6	1.5	4.6	1	R2	21	350
-0003-2	10.8	8.1	2	6.6	1.5	R2	21	350
-0004-2	13.8	11	3	7.5	2	R2	21	410
-0006-2	24	21	5	13	3	R3	41	550
-0009-2	32	27	7.5	17	5	R3	41	680
-0011-2	46	34	10	25	7.5	R3	41	850
-0016-2	62	42	15	31	10	R4	61	1150
-0020-2	72	54	20 *	42	15 **	R4	61	1490
-0025-2	86	69	25	54	20 **	R5	147	1790
-0030-2	112	80	30	68	25 **	R5	147	2090
-0040-2	138	104	40 *	80	30 **	R5	147	2770
-0050-2	164	132	50	104	40	R6	238	3370
-0060-2	202	157	60	130	50 **	R6	238	4050
-0070-2	282	192	75	154	60 **	R6	238	4910
Three-phase supply voltage 380 V, 400 V, 415 V, 440 V, 460 V or 480 V								
-0004-5	6.5	4.9	3	3.4	2	R2	21	410
-0005-5	8.2	6.2	3	4.2	2	R2	21	480
-0006-5	10.8	8.1	5	5.6	3	R2	21	550
-0009-5	13.8	11	7.5	8.1	5	R2	21	690
-0011-5	17.6	14	10	11	7.5	R2	21	860
-0016-5	24	21	15	15	10	R3	41	1150
-0020-5	32	27	20	21	15	R3	41	1490
-0025-5	46	34	25	27	20	R3	41	1790

Special cases


- Intermittent torque is required for a relatively long time
 - Large inertias
 - Results in long accel time, several minutes
 - Drive and motor sized for acceleration torque
 - Examples
 - Centrifuges
 - Kilns
 - Long periods of breakaway torque
 - Mixer starting with product

Watch the limits

- Limits that can come in to play
 - Torque
 - AC Motors have max torque limits, about 200% (Drive limits motor to about 70% of motor's rated breakdown torque)
 - Speed
 - Limited by maximum safe mechanical speed
 - Limited by maximum drive frequency
 - Limited by reduced maximum torque above base speed (Constant HP operation)
 - Current
 - Limited by inverter
 - Full speed motor current rises when line voltage is low
 - Regenerative (braking) torque
 - If less than 10% flux braking may be good enough
 - If more than 10% but intermittent, such as stopping only, use brake chopper and resistor
 - If more than 10% and continuous, consider a regenerative drive

Variable torque above base speed

Variable torque

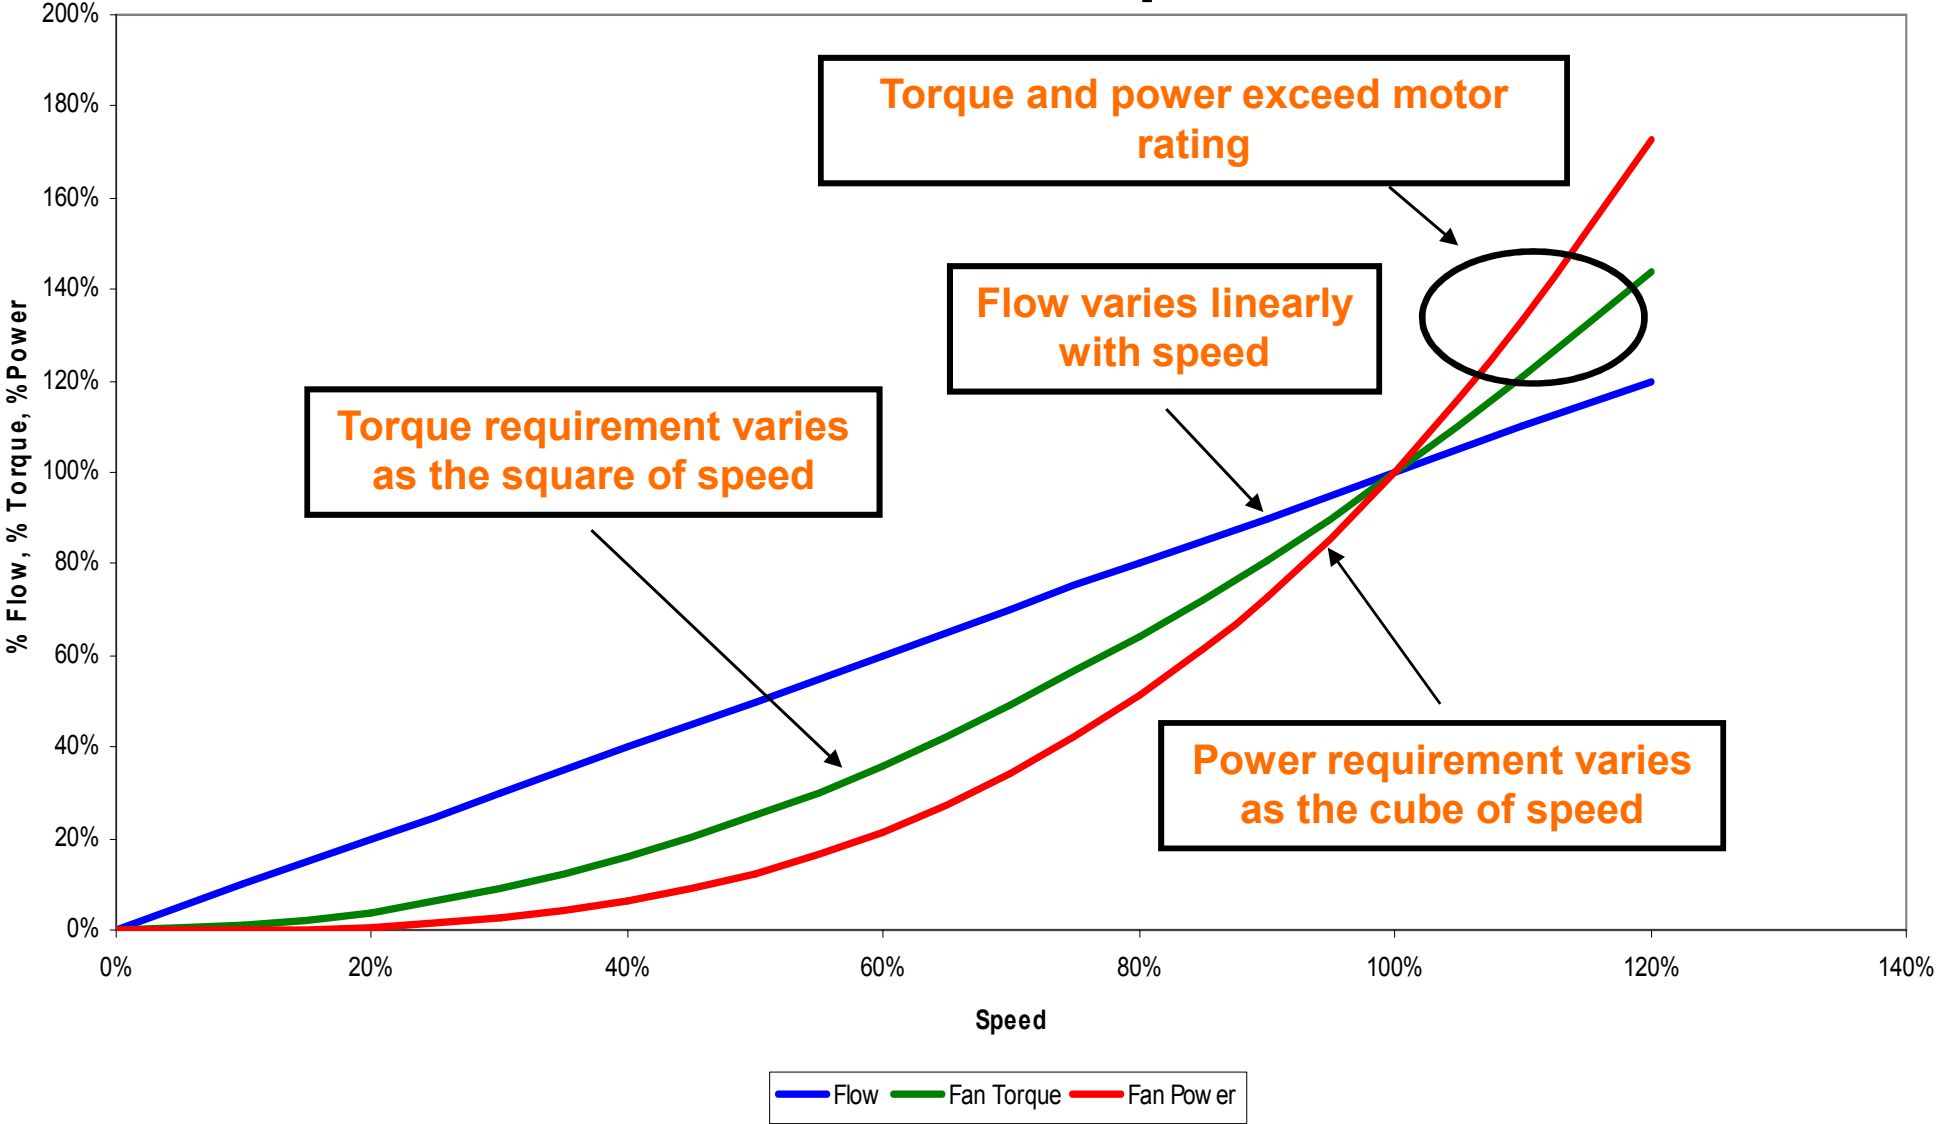

Conclusion

- Drive sizing made easy
 - Determine the application's requirements
 - Torque
 - Continuous
 - Intermittent
 - Speed
 - Pick the motor
 - Try to gear in to run at base speed
 - Size on torque not power!
 - Pick the inverter
 - Continuous current
 - Overload current

Now, that's easy!

Automation & Power World 2011

April 18-21, 2011 in Orlando, Florida













Workshop statistics

Over 400 hours of training

- ~45 customer presented case studies
- 87 sessions in the Technology and Solution Center
- 11 hours of panel discussions consisting of customers, industry experts and ABB executives
- Nearly 50 hours of hands on technical training

ABB Automation & Power World

Registration options

	Full Conference	Courtesy Registration
Access to ABB product developers and application experts in the 70,000 ft ² (over 1.5 acre) Technology & Solution Center		
Access to a series of complimentary and educational workshops.		
Free Lunch and Tuesday Evening Reception		
Access to over 300 additional educational workshops – Including ARC Analysts presentations		
Up to \$1,500 off a future ABB purchase*		
Complimentary ARC report valued at \$2,500!*		
Evening Events (Monday and Wednesday)		
* See www.abb.com/a&pworld for more details	Cost	Free!
	\$300 per day or \$800 for all three days.	


Top ten reasons to attend



- Become more valuable, choose from over 400 educational workshops and hands-on training sessions
- Connect with thousands of peers and industry experts from 40 countries
- Ask questions of, and give feedback to, ABB product developers and executive management
- Get up to date with new and emerging technologies and industry trends
- Learn how to maximize the value from your existing assets
- Discover how to improve grid reliability, energy efficiency and industrial productivity
- Apply lessons learned from over 45 customer-presented case studies
- Focus on critical non-technical issues facing your company in the business forums
- Succeed professionally by earning CEUs on select workshops and PDHs for every workshop you attend
- See the widest range of technologies from one company at one conference!

Automation & Power World 2011

April 18-21, 2011 in Orlando, Florida

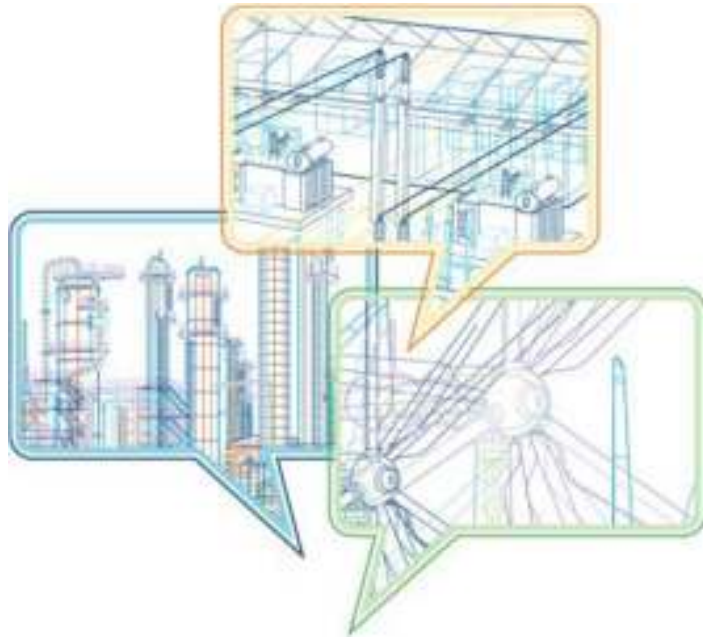

Register today!

www.abb.com/a&pworld

Join the Automation & Power
conversation:

Stay in the loop:



Power and productivity
for a better world™

