

On-load tap-changer type UCGD./III, VUCGD./III, UCLD./III, VUCLD./III, UCDD./III,
15 tap positions, coarse/fine switching.

Max. effective No. of turns in pos. 1.


The tap-changer is delivered set in pos. 8,
the preceding pos. was 7.

Lindningskopplare typ UCGD./III, VUCGD./III, UCLD./III, VUCLD./III, UCDD./III,
15 lägen, grov/fin koppling.

Max antal effektiva varv i läge 1.

Lindningskopplaren levereras inställd i läge 8,
föregående läge var 7.

Pos. Läge	R connects in direction R förbinder i riktning	Tap selector and diverter switch connect Väljaren och lastkopplaren förbinder
1	↓	1-V-x
2		2-H-v
3		3-V-x
4		4-H-v
5	↓	5-V-x
6		6-H-v
7	↓	7-V-x
8	↑	8-H-v
9	↑	9-V-x
10		10-H-v
11	↑	11-V-x
12		12-H-v
13		13-V-x
14		14-H-v
15	↓	15-V-x

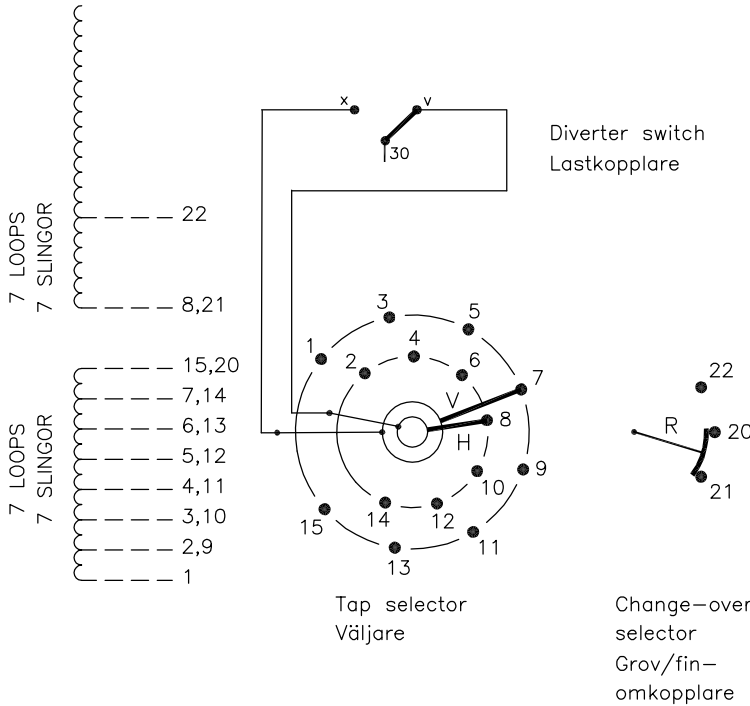

The tap-changer is shown in pos. 8,
the preceding pos. was 7.

The tap selector and the change-over selector
are seen from above.

Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 8,
föregående läge var 7.

Väljaren och grov/fin-omkopplaren sedda uppifrån.
Kontaktarm V ligger över kontaktarm H.

Continuous lines show leads included in the
tap-changer. Dashed lines show leads belonging
to the cleats and leads.

Heldragna linjer visar ledare som ingår i
lindningskopplaren. Streckade linjer visar
ledare som tillhör anslutningsdonet.

2	VUCL Added	CA	12	37
1	VUCG Added	CE	07	47
Rev Ind	Revision	Appd	Year	Week

Accepted by qual control R.Yngvesson	Accepted for prod by	Description (English) CONNECTION DIAGRAM	DATAORIGINAL
Design checked by B-O.Stenestam	Drawn by L.Bergman	Description (own language) KOPPLINGSSCHEMA	File name 0369-4
Drawing checked by M.Hedlund	Issued by Dept Year Week COM/TKO 97 16	5492 0369-4	Lang 1
Asea Brown Boveri			Revind -

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © ABB 19

Sheet	Cont
Form No.	Year Week
Dept	Year Week
Revind	Year Week
Design checked by	Year Week