


Camarque

Elegant LED lighting



Aesthetically pleasing, decorative LED luminaire

- Fire-resistant polycarbonate luminaire body with opal diffuser
- Angled and banded trim options in a range of finishes
- Semi-recessing accessory available
- Complies to IEC 60598.2.22 and IEC 60598-1

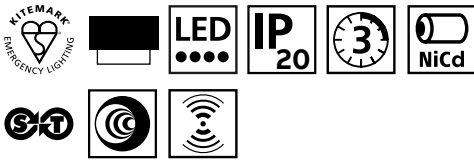


Luminaire

Order code	Description	Input voltage	Lamp type	Lamp output (lm)	Power consumption (VA/W)	Operation / duration (hrs)	Environment temp. (°C)	Weight (kg)
CLQ1LA1	CLQ LED 2D WH/OPAL HF	110-230 AC/DC 0-60Hz	1 x LED 20W	1830	20.8 / 19.5	230V	0-40	1.7
CTCLQ4LA1	CLQ LED 2D WH/OPAL CT	220-240 AC 50/60Hz	1+1 LED 20+2W	1830/207	25.8 / 23	3	0-30	2.2
IR2CLQ4LA1	CLQ LED 2D WH/OPAL IR2	220-240 AC 50/60Hz	1+1 x LED 20+2W	1830/207	25.8 / 23	3	0-30	2.2
LTCCLQ1LA1	CLQ LED 2D WH/OPAL LTC	220-240 AC 50/60Hz	1 x LED 20W	1830	20.8 / 19.5	230V	0-40	1.8
STCLQ4LA1	CLQ LED 2D WH/OPAL SLFTST	220-240 AC 50/60Hz	1+1 x LED 20+2W	1830/207	25.8 / 23	3	0-30	2.1



Accessories


Order code	Description
CLQ/SR	Semi-recessing kit

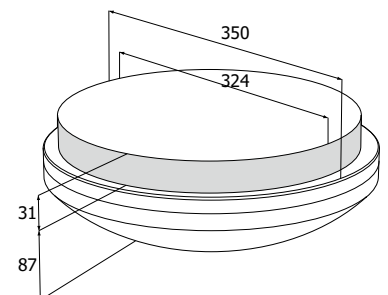





Cable entry via 20 mm hole on rear of unit.
Ceiling cutout 330 mm when semi-recessing.

Camarque

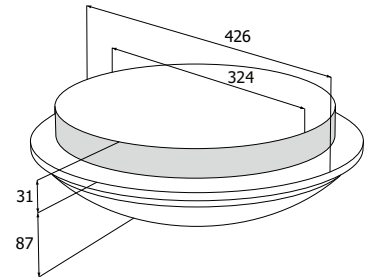Elegant LED lighting



Angled trim accessory

Order code	Trim colour
CLQ/GA	
CLQ/SA	
CLQ/WA	
CLQ/BKA	
CLQ/SR	Semi-recessing kit

Ceiling cutout 330 mm when semi-recessing

