

High-precision lubrication oil density measurement with the CoriolisMaster FCB300 mass flowmeter NOVELIS aluminum rolling mill in Lüdenscheid, Germany

Customer




Novelis is the world leader in aluminum rolling, producing nearly 20 percent of the world's flat-rolled aluminum products. When it comes to aluminum recycling of beverage cans, Novelis recycles approximately 40 billion cans each year — enough to circle the globe more than 100 times. This recycled aluminum is primarily utilized by the company's own rolling facilities to produce new can sheet. This recycling loop can be repeated endlessly because, unlike many other materials, aluminum does not degrade during the recycling process. The Lüdenscheid mill in Germany produces 13000 tons of aluminum foil each year.



The challenge

The rolls are the heart of the production process and require constant lubrication using high-quality oil. However, oil thinning also occurs time and time again during production, which reduces lubrication performance. Rolls can be damaged once the oil density drops below a certain level, resulting in extremely high repair costs and requiring production to come to a stop.

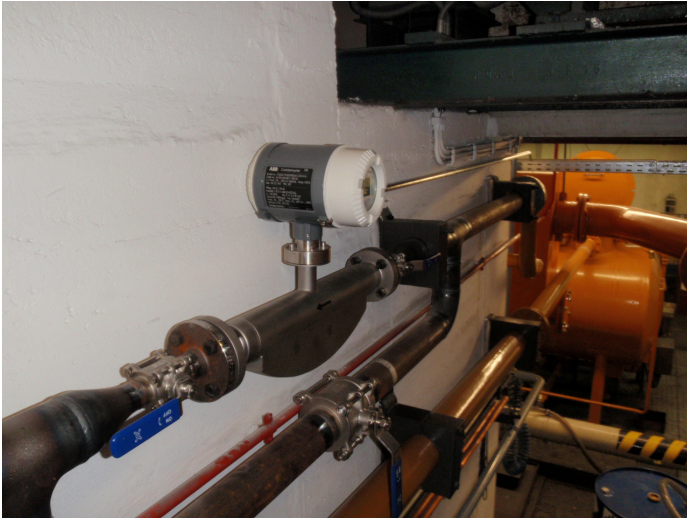

FC/ME102-EN 08.2012

The solution

Oil thinning is accompanied by a minimum density change of around 0.8 g/l. With the CoriolisMaster FCB350 offering high-precision density measurement of up to 0.5 g/l in field adjustment, fluctuations in density can be detected at an early stage. Appropriate countermeasures must then be taken to prevent damage to the rolls.

In addition to high-precision density measurement, it is important to ensure the density signal is particularly smooth so that unique trends can be generated. The CoriolisMaster FCB350 delivers excellent performance in this area too and is not only easy to handle, but is also compact and features low levels of pressure loss. As well as this, the device's ability to measure flowrate is a welcome bonus.

Contact us

ABB Limited

Process Automation

Oldends Lane, Stonehouse
Gloucestershire, GL10 3TA
UK

Tel: +44 (0)1453 826661

Fax: +44 (0)1453 829671

ABB Inc.

Process Automation

125 E. County Line Road
Warminster, PA 18974
USA

Tel: +1 215 674 6000

Fax: +1 215 674 7183

measurement@us.abb.com

ABB Automation Products GmbH

Process Automation

Dransfelder Str. 2
37079 Goettingen
Germany

Tel: +49 551 905-534

Fax: +49 551 905-555

www.abb.com

Note

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents - in whole or in parts - is forbidden without prior written consent of ABB.

Copyright© 2012 ABB

All rights reserved

3KDE010009R5501