


FurseWELD

Cable to earth rod CR24

Cable to earth rod CR24 - FurseWELD

Earth rod A ϕ (mm)	Earth rod B ϕ (")	Stranded/solid circular conductor size C (mm ²)	Mould part no.	Order code	Powder cartridge part no.	Handle clamp part no.
14.2	5/8	16 *	CR24-4-14216	7TCA083910R2988	115P10	HCPK4
14.2	5/8	25	CR24-4-14225	7TCA083910R2989	115P10	HCPK4
14.2	5/8	35	CR24-4-14235	7TCA083910R2990	115P10	HCPK4
14.2	5/8	50	CR24-4-14250	7TCA083910R1766	200P10	HCPK4
14.2	5/8	70	CR24-4-14270	7TCA083910R1767	250P10	HCPK4
14.2	5/8	95	CR24-4-14295	7TCA083910R1768	250P10	HCPK4
14.2	5/8	120	CR24-4-142120	7TCA083910R2992	2 x 150P10	HCPK4
14.2	5/8	150	CR24-4-142150	7TCA083910R2864	2 x 150P10	HCPK4
14.2	5/8	185	CR24-5-142185	7TCA083910R2993	2 x 200P10	HCPK5
14.2	5/8	240	CR24-5-142240	7TCA083910R2994	2 x 200P10	HCPK5
17.2	3/4	16 *	CR24-4-17216	7TCA083910R3028	115P10	HCPK4
17.2	3/4	25	CR24-4-17225	7TCA083910R3029	115P10	HCPK4
17.2	3/4	35	CR24-4-17235	7TCA083910R2769	115P10	HCPK4
17.2	3/4	50	CR24-4-17250	7TCA083910R2692	250P10	HCPK4
17.2	3/4	70	CR24-4-17270	7TCA083910R2459	2 x 150P10	HCPK4
17.2	3/4	95	CR24-4-17295	7TCA083910R3022	2 x 150P10	HCPK4
17.2	3/4	120	CR24-4-172120	7TCA083910R1769	2 x 150P10	HCPK4
17.2	3/4	150	CR24-5-172150	7TCA083910R2469	2 x 200P10	HCPK5
17.2	3/4	185	CR24-5-172185	7TCA083910R2882	2 x 200P10	HCPK5
17.2	3/4	240	CR24-5-172240	7TCA083910R2798	2 x 250P10	HCPK5
17.2	3/4	300	CR24-5-172300	7TCA083910R1770	2 x 250P10	HCPK5

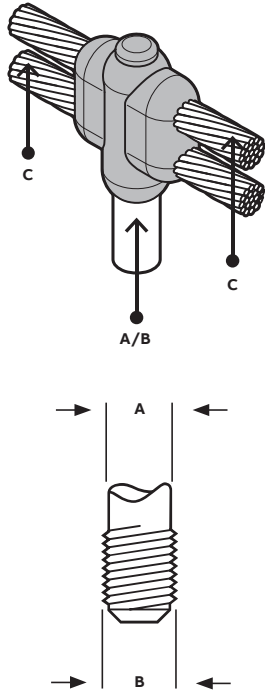

Suitable for connections to copperbond rods - for connections to solid copper and stainless steel rods please contact our sales office

Threaded portion of copperbond rods must be removed prior to welding

Special moulds for all FurseWELD products can be manufactured to meet specific customer applications on request

*4 x S103 Sleeve required when joining conductors 16 mm² or smaller

For order codes of powder cartridges and handle clamps, see pages 49-50

FurseWELD moulds should only be used with FurseWELD powders, handle clamps and accessories. If moulds, powders, handle clamps and accessories from other manufacturers are utilized, we cannot guarantee the safe use or the integrity of the completed joint

FurseWELD moulds for use with stranded conductor are designed for use with non-compacted conductor to BS EN 60228. If a mould for compacted conductor is required, please contact your local representative

Conductors must be installed in the orientation shown to achieve the correct connection