

CATALOG

ABB Ability™ System 800xA® 6.0.3.4

Product Catalog



Table of contents

008	System 800xA Extended Automation
010	System 800xA, System Capabilities
012	System 800xA Software
012	License
013	800xA 6.0 System, Lifecycle Management – System Expansion
013	System Expansion
014	System 800xA 6.0 System Identifier
014	Control System Lifecycle Management Program
014	System Identifier
015 – 036	800xA 6.0 System
015	System 800xA Base System
016	Tag Expansion
017	Subscriber System Tags
018	System 800xA Applications
018	Connectivity
019	Connectivity
020	System Extensions

021	Cyber Security
022	Control Room Solutions
024	Operator Workplaces
025	Extended Operations
025	Public Addressing - Live Video System
026	Batch Management
027	Standard Engineering Tools
030	Engineering Systems
032	Professional Engineering Tools
032	Information Management
033	System 800xA History
034	IM Historian Server
035	IM Historian
036	Safety
036	Asset Optimization
037	Asset Monitors
037	Device Management & Fieldbuses
039	Libraries
040	Localization (NLS)
041–061	AC 800M Processor Units
042	AC 800M Controllers selection guide
046	Hardware Upgrade orders
047	System Units
047	AC 800M Processor Units
050	AC 800M High Integrity Units

051	Extra Batteries
051	Control Network
051	Serial Interfaces on TP830
052	Communication Interface selection guide
054	Serial Communication Interface
054	MODBUS TCP
054	PROFIBUS DP
054	PROFINET IO
055	FOUNDATION Fieldbus
055	IEC 61850
055	Ethernet/IP
056	Advant Fieldbus 100
056	MasterBus 300
056	S100 I/O Bus
057	Satt I/O
057	INSUM
057	DriveBus
058	Bus Accessories
059	AC 800M Power supply and Voters selection guide
061	AC 800M Power supply and Voters
061	AC 800M Mounting Rails
062–084	S800 I/O Modules
065	S800 I/O Modules Selection guide
066	Extended warranty for S800 I/O Hardware
066	ISA-S71.04 level G3 Compliance

066	Field Communication Interface
067	Upgrade Kit and Tool Cables
068	S800 I/O Modules
071	Pulse Counting Modules
072	Label sets for I/O Modules
072	High Integrity I/O Modules
073	Module Termination Units
075	S800L I/O Modules
075	Label sets for S800L I/O Modules
076	ModuleBus Communication Parts
077	S800 I/O Power Supply and selection guide
079	Power Supply
080	Process Industries Application Libraries
080	Process Control Device Library
080	Process Control Device Library Licenses
081	Additional Control Device Library Licenses
081	PCDL Application Engineering
082	Process Control Equipment Library
083	Process Control Equipment Library Licenses
083	Additional Control Equipment Library Licenses
084	PCEL Application Engineering
084	ProBase
085–097	S900 Remote I/O System
086	Ex zone 1 system components
088	Ex zone 2 system components

090	S900 Remote I/O System – Safe area system components
091	Safe area system components
092	Accessories
093	Field Housing S900-FH660S
094	Field Housing S900-FH680S
095	FOUNDATION Fieldbus Network Components
096	PROFIBUS Network Components
097	S800 I/O, S900 I/O, Fieldbus and AC 800M - Extended warranty time
098–099	Media
098	ABB Ability™ System 800xA – Medi
099	Dongles
100–105	Panel 800 Version 6.2
101	Specifications Panel 800 Version 6.2
102	Lifecycle Management Program
103	Panel Builder 800
103	Operator Panels
105	Dongles
105	Accessories
107–112	System 800xA Networks
108	System 800xA Networks selection guide
110	Network switches
110	Network routers/firewalls
111	Network accessories

111	Modular Transceivers (SFPs)
112	Specifications Optical Transceivers
113	IEC 61850 Engineering Tool for System 800xA 6.0
114	Extended Warranty Time S800 I/O, S900 I/O, Fieldbus and AC 800M
115	References
115	References and documentation
115	System 800xA Hardware Selector
116	Links and trademark info

System 800xA Extended Automation

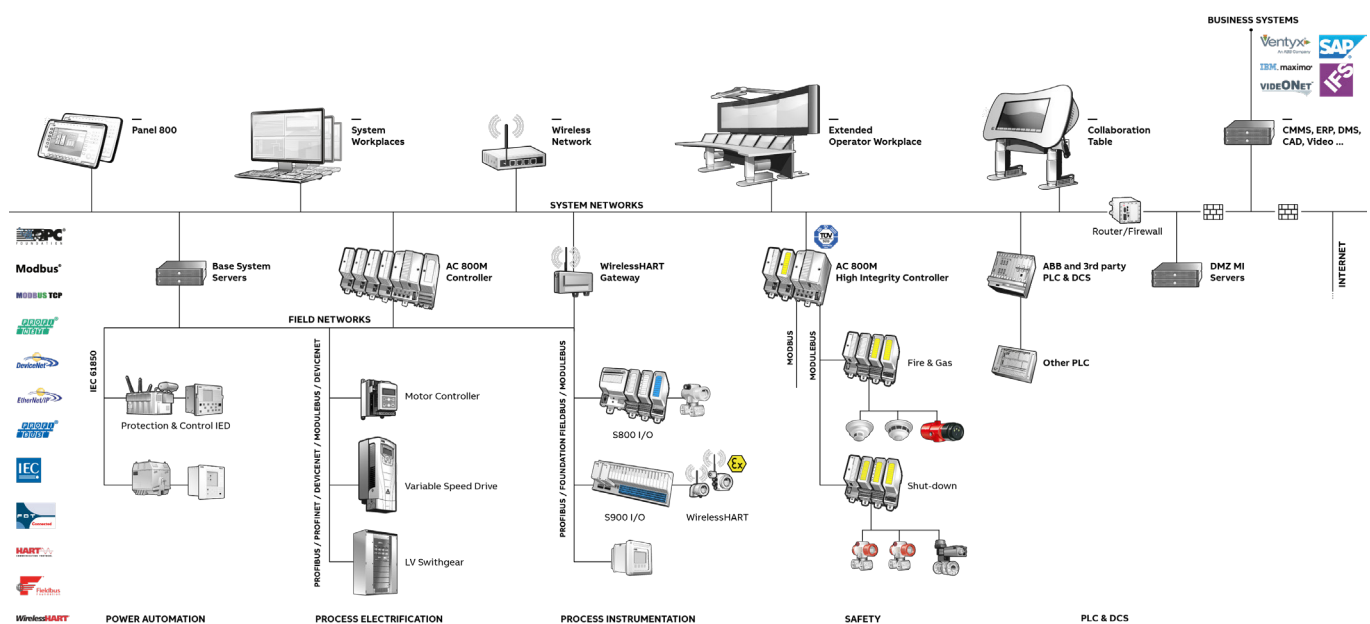


ABB Ability™ System 800xA® is not only a DCS (Distributed Control System) it's also an Electrical Control System, a Safety System and a collaboration enabler with the capacity to improve engineering efficiency, operator performance and asset utilization.

System 800xA is the only automation platform that has the ability to engineer, commission, control, and operate automation strategies for process, power, electrical and safety in the same, redundant, reliable system. Also, facilitating collaboration is System 800xA's pre-integrated applications such as a full featured historian, asset optimization and batch management.

Promoting collaboration

Collaboration between people and systems is a necessity to increase engineering efficiency, asset utilization, energy savings, and operator effectiveness. System 800xA's 'xA' stands for Extended Automation and utilizes the system architecture which was built for collaboration.

System 800xA

ABB's award winning System 800xA provides you with a better way to achieve measurable productivity and profitability improvements. System 800xA extends the scope of traditional DCS systems to include all automation functions in a single operations and engineering environment; enabling your plants to perform smarter and better at substantial cost savings.

Embracing the principles of open, real-time networking, System 800xA provides a scalable solution that spans and integrates loop, unit, area, plant, and inter plant controls. From providing a secure foundation with robust, but flexible, base level regulatory and sequence control to higher level management and advanced control functions that include safety controls, batch management, maintenance management, information management, and network management solutions, System 800xA meets the application needs of a wide variety of industries.

System 800xA provides you with a secure, reliable control environment with minimum effort through built-in security features such as access control, user authentication, and audit trail capability. ABB enhances secure system operations by actively participating on security standards committees, conducting threat-modeling studies, and incorporating "safe design" practices into product development.

Based upon the Aspect Object technology and a common set of hardware, System 800xA seamlessly integrates traditionally isolated DCS and Safety systems. SIS realization is achieved by either utilizing individual controllers or through dedicated applications within the same controller. With this embedded control and safety architecture, System 800xA reduces costs significantly; achieving the objectives of both systems – maximum plant availability at minimum risk.

For more information about ABB Ability™ System 800xA® please visit our web:
solutions.abb/800xA

ABB Ability™ System 800xA®

System Capabilities

System 800xA from ABB is a control system that enables plant wide collaboration between people, systems and equipment. System 800xA utilizes a system architecture built for collaboration in a fully redundant, reliable environment.

Removing the barriers in traditional distributed control systems, System 800xA provides a collaboration environment that is required to increase productivity while reducing risk and total cost of ownership.

System 800xA Capabilities	
Tags	120,000
Total number of Clients, normal or remote (nodes with one or several workplaces)	80
I/O channels	From a hundred to over 1,000 per controller depending on CPU type and application.
Operator screens per system	160
Operator screens per Operator Workplace	4
Operator Workplaces, normal or remote	80
Engineering Workplaces	20
Remote Engineering Workplaces	5
Information Management Workplaces	80
Desktop Displays for trends and events	150
Batch Workplaces	40
Nodes in one control network segment (excl. domain server and controllers)	100
Aspect Services redundancy	1 (single, redundant 1oo2 or 2oo3)
AC 800M Connectivity services	8 (16 if redundant)
AC 800M controllers per connectivity services	48 (Application Dependent)

System 800xA Capabilities	
PROFIBUS Connectivity services	8 (16 if redundant), 2,500 devices per server
HART Connectivity services	8 (16 if redundant), 2,500 devices per server
Foundation Fieldbus Connectivity services	8 (16 if redundant), 4,000 devices per server
PLC Connect services	3 (6 if redundant), 25,000 signals per server
Asset Optimization services	4
Multisystem Integration Subscribers	2
Multisystem Integration Providers	20
Connectivity servers, total	12 (24 if redundant)
Application servers	10
Batch servers	1 (single or redundant 1oo2)
Information Management servers (used as single, redundant, or consolidating servers)	6
Supported Fieldbuses	Foundation Fieldbus, PROFIBUS, PROFINET, HART
Electrical Integration	IEC 61850
Standard Serial Protocols	RS232C: MODBUS RTU/TCP, 3964R, Comli
External application communication	OPC, OLE-DB, ODBC
Network	Ethernet TCP/IP Redundant
Network device supervision	SNMP
Operating System	Server: Windows Server 2012 R2 or Windows Server 2016. Client: Windows 8.1 Professional/Enterprise (64 bit US English Version), Windows 10 Enterprise or Windows IoT Enterprise, 2015 or 2016 Long Term Service branch.

PC Requirements	Server	Client	Single PC
PC models verified for use with System 800xA can be found on our web page for certified 3rd party products at http://www.abb.com/product/us/9AAC171278.aspx			
Processor	State of the art certified hardware for best performance.		
Memory	Minimum 8GB, additional memory based on intended use. Only running 64-bit.		
Disk	120 GB For additional requirements for History Data, see System 800xA System Guide	120 GB	120 GB
Network Interface Card	Minimum 100 Mbit. 1 Gbit backbone and network cards recommended.		
Graphic Card	-	Min. 512 MB Graphics card. For optimal performance 512 MB per monitor is recommended.	Min. 512 MB Graphics card. For optimal performance 512 MB per monitor is recommended.
Monitor	Large monitor (19" or more) recommended. Resolution: minimum 1280x1024 recommended.	Large monitor (19" or more) recommended. Resolution: minimum 1280x1024 recommended.	Large monitor (19" or more) recommended. Resolution: minimum 1280x1024 recommended.
UPS	Recommended	Recommended	Recommended
Virtualization	VMware vSphere ESXi	VMware vSphere ESXi	VMware vSphere ESXi

Performance and capacity	
Graphical displays	Unlimited (depending on available Hard disk space)
Display exchange time	Standard Main Faceplate: ≤1 second. Graphic display with 100 objects: ≤1 seconds
Command response time (order to indication)	<2 seconds
Reports	Unlimited
Alarm and event lists	100
X-Y plots	Unlimited
Active Batch Phases	300
Asset Monitors	20,000
History Logs per system (Information Manager)	180,000
History Log disc space per value (Information Manager)	21 bytes
Stored OPC Messages (Information Manager)	12,000,000
History Logs per server (800xA History)	150,000
History Log disc space requirements (800xA History)	40 bytes
Stored OPC Messages (800xA History)	Time/Disc space limited
Event burst capacity	1000 alarms/second for 3 seconds plus 10/s for 15 minutes
Event storage disc space requirements	Storage per message: 6k bytes
Alarm/Event throughput/sec	30
OPC DA throughput (items per sec) per AC 800M Connectivity server	30,000
Max number of softpoint signals	25,000
Max number of soft events	10 /second
Scheduling Service capacity	Max. 200 simultaneous jobs per scheduling server
Calculation Services	10
Calculations/second	100
Write transactions/second	The Calculation server can write up to 10 values/second to process (AC 800M) objects
Calculations that may be queued waiting to be executed	1,000 calculations per Calculation server

This table is an extract from the "800xA 6.0 System Guide Summary" and may be changed without notice. Note that combination of functions may impact the total capacity, and that conditions may apply for certain parameters. For explanations and further details we kindly refer to the System 800xA System Guide.

System 800xA Software

The system installation is supported by the Automated Installation program. The Automated Installation program is a shell framework to ease the installation and configuration of your 800xA System.

Installation is never prevented due to lack of licensing, but licenses are required to unlock features for operating or engineering the system. Updates and security related software from non-ABB companies must be downloaded and installed separately, as guided from the Automated Installation program.

The Automated Installation program is supplied on the 800xA media box. The common part is to specify the system details of your system in the Automated Installation program System Planner and generate a unique setup package for each node (workstation) describing what should be installed from the 800xA media box, or a file server, onto each node, and how it should be configured.

The System 800xA Installer is installed on each node, and then the following steps are executed to install and configure your node:

- Windows configuration
- System Verifier tool
- System installation
- System configuration

The setup-files may also reside on the file server. Windows configuration configures the environment (IP address, hostname, Windows components, and Windows services) connect to the workgroup or domain. The System Verifier tool checks for the necessary 3rd party software and where installations are required.

License

The central licensing system (CLS) is local to each system. Each system is ordered separately, and a separate license file is fetched for each system from the Software Factory. This also means that each system is managed individually updates and upgrades, as well as initial system installation.

The software or hardware described in the document is furnished under a license and may be used, copied, or disclosed only in accordance with the terms of such license.



800xA 6.0 System

Lifecycle Management – System Expansion

Automation Software Maintenance Program

Automation Software Maintenance is the control system life-cycle support program and is aimed at providing services for the maintenance, continuous enhancement and evolution of the ABB installed base of control systems.

Each and every control system under Automation Software Maintenance can make use, depending on the active subscription mode, of the following main program deliverables listed below

Software Updates and upgrades

Automation Software Maintenance users have the exclusive right to receive control system software updates and upgrades:

- An Automation Software Maintenance agreement, at the appropriate agreement mode, provides access to software patches, technical corrections, roll-ups, service packs, firmware updates, feature packs, software updates, upgrades and software for control system evolution purposes.
- The Automation Software Maintenance user, at the appropriate agreement level, is entitled to newer licensed software versions of the installed control systems products as they are released. This right gives the user access to software upgrades and enhancements for System 800xA.

Cyber and IT security reports and updates

Automation Software Maintenance users have the exclusive right to access IT security validation reports, ABB reviews, tests and validates on a regular basis Microsoft security updates and 3rd party virus scanner software for compatibility with the 800xA control system.

Automation Software Maintenance users will have access to all available cyber and IT security reports and updates for application as needed in order to ensure that the running control systems are better protected against any security risks which are encountered more often now than ever before.

Each and every control system must be under Automation Software Maintenance before making use of the published IT security validation reports.

Expert product technical support

Automation Software Maintenance users have access to ABB expert and R&D support organizations. This support is being provided for troubleshooting of product defects and issues they encounter during the validity of the subscription.

Read more about our Automation Software Maintenance Program here: new.abb.com/control-systems/service/offerings/service-agreements

System 800xA 6.0 System Identifier

Control System Lifecycle Management Program

Control System Lifecycle Management Program



Automation Software Maintenance is the ABB control system lifecycle management program for the Extended Automation, Freelance, Compact Product Suite, Symphony Plus and OCS product lines. ABB recommends its customers to use Automation Software Maintenance for all its installed control systems.

With this program, customers can keep control software up-to-date and maintain a flexible path forward to new system software technology. It provides services to maintain and continually advance and enhance your ABB control system installation. You may choose the level of maintenance and upgrade support that works best for your immediate needs and long-term production targets.

Read more about our Automation Software Maintenance Program and its many valuable services here: new.abb.com/control-systems/service/offerings/service-agreements

Please contact your local sales representative for detailed information on the program and on how to order Automation Software Maintenance subscriptions.

System Identifier

800xA System Identifier		Article no.	
800xA System Identifier System identifier, used as identifier for each individual 800xA system. The ID must be used when ordering hardware and software to a system. After ordering this item a system license in design phase can be downloaded from SOFA.		3BSE081075R1	

800xA 6.0 System

Remark

Remark
When System Software Expansion licenses are ordered, the Serial Number of the ABB Software License Certificate for the previously ordered System Software licenses must be stated on the order to the ABB Supplier.

Base System

System 800xA Base System

The base system is used as the base for 800xA production system, mulitsystem integration subscriber system and as Read only system. Tags can be added to all these systems.

Only one type of subscriber tags (ie. subscriber tags or read only subscriber tags) can be added to a subscriber system. A subscriber system can not be converted from read only to read and write and vice versa.

800xA Base System		Article no.	
	800xA Base System Includes one Operator Workplace, one Engineering Workplace, AC800M Connectivity, Redundant Aspect Server, Plant Explorer, Logging of Operator actions,Topology Status Viewer, Softpoint Server, Scheduler, Primary History Logs (logging of signals for Operator trends.	3BSE087723R1	

800xA Production License		Article no.	
	800xA Production License Ordered to be able to download a production license to switch the system from Engineering Phase to Production Phase.	3BSE081642R1	

Base System

Tag Expansion

Tags	Article no.	
All process objects with faceplate for operator interactions counts as a tag. (Total max 120,000. Can not be mixed with redundant tags)		
100 tags, non-redundant	3BSE078782R1	
1,000 tags, non-redundant	3BSE078782R2	
10,000 tags, non-redundant	3BSE078782R3	
A TSA is NEEDED for a system with more than 60,000 tags.		

Redundant Tags	Article no.	
All process objects with an operator faceplate counts as a tag. (Total max 120,000. Can not be mixed with non-redundant tags) Enables tag access through redundant Connectivity Servers.		
100 tags, redundant	3BSE078783R1	
1,000 tags, redundant	3BSE078783R2	
10,000 tags, redundant	3BSE078783R3	
A TSA is NEEDED for a system with more than 60,000 tags.		

Non-Redundant to Redundant Tag Conversion	Article no.	
All process objects with faceplate for operator interaction counts as a tag. (Total max 120,000. Redundant and non-redundant tags can not be mixed) Enables tag access through redundant Connectivity Servers.		
100 Non-redundant to Redundant Tag Expansion	3BSE079637R1	
1,000 Non-redundant to Redundant Tag Expansion	3BSE079637R2	
10,000 Non-redundant to Redundant Tag Expansion	3BSE079637R3	
A TSA is NEEDED for a system with more than 60,000 tags.		

Base System

Subscriber System Tags

Subscriber System Tags	
	Tags in the subscriber system in a Multisystem Integration configuration. These tags are Object with a faceplate that collects data from a provider system. Subscriber tags are only required in the subscriber system.
	Subscriber tag is required for every provider tag that needs to be accessed from graphics, alarms, trends etc, in a subscriber system.
	Note that non-redundant Multisystem Subscriber Tags can not be mixed with Multisystem Subscriber Redundant Tags. Note that Multisystem Subscriber Tags can not be mixed with Multisystem Read Only Subscriber Tags.

Multisystem Subscriber Tags	Article no.	
Tags in the subscriber system in a Multisystem Integration configuration.		
100 Multisystem Subscriber Tags	3BSE079526R1	
1,000 Multisystem Subscriber Tags	3BSE079526R2	
10,000 Multisystem Subscriber Tags	3BSE079526R3	
A TSA is NEEDED for a system with more than 60,000 tags.		

Multisystem Subscriber Redundant Tags	Article no.	
Tags in the subscriber system in a Multisystem Integration configuration. Enables tag access through redundant Connectivity Servers.		
100 Multisystem Subscriber Redundant Tags	3BSE079527R1	
1,000 Multisystem Subscriber Redundant Tags	3BSE079527R2	
10,000 Multisystem Subscriber Redundant Tags	3BSE079527R3	
A TSA is NEEDED for a system with more than 60,000 tags.		

Non-Redundant to Redundant Multisystem Subscriber Tag Conversion	Article no.	
Tags in the subscriber system in a Multisystem Integration configuration.		
100 Multisystem Subscriber Non-Redundant to Redundant Tags	3BSE079641R1	
1,000 Multisystem Subscriber Non-Redundant to Redundant Tags	3BSE079641R2	
10,000 Multisystem Subscriber Non-Redundant to Redundant Tags	3BSE079641R3	
A TSA is NEEDED for a system with more than 60,000 tags.		

Base System

System 800xA Applications

Multisystem Read Only Subscriber Tags	Article no.	
<p>Tags in a read only subscriber system in a Multisystem Integration Configuration. Read only subscriber systems provides aspect object enabled read only clients to office users. Subscriber tags are only required in the subscriber system.</p> <p>A subscriber tag is required for every tag that needs to be accessed in a provider system.</p> <p>Tag access is required for tags in graphics, alarms, trends etc. Note that Multisystem Read Only Subscriber Tags can not be mixed with Multisystem Subscriber Tags.</p>		
<p>100 Multisystem Read Only Subscriber Tags Tags in a read only subscriber system in a Multisystem Integration Configuration.</p>	3BSE079104R1	
<p>1,000 Multisystem Read Only Subscriber Tags Tags in a read only subscriber system in a Multisystem Integration Configuration.</p>	3BSE079104R2	
<p>10,000 Multisystem Read Only Subscriber Tags Tags in a read only subscriber system in a Multisystem Integration Configuration.</p>	3BSE079104R3	
A TSA is NEEDED for a system with more than 60,000 tags.		
<p>Office Workplace – Read Only Client Includes one local or remote read-only operator workplace, Excel based reporting aspects. Microsoft Excel is NOT included. Use of up to 2 screens is included. (Only in systems with read-only MI tags)</p>	3BSE078864R1	

Base System

Connectivity

Connectivity	Article no.	
<p>Note that there may be 800xA price list options that are not supported with a particular OCS controller. Please refer to the table "Available functions per Controller Connectivity" in the System Guide "Technical Data and Configuration Information". To check what connectivity combinations that are valid, use the Project Wizard or refer to the System 800xA System Guide for information.</p>		
<p>PLC Connect Faceplates, graphical elements and means to communicate with the system. (one per system)</p>	3BSE078822R1	
<p>PLC Connect Dial-Up Scaled on number of dial up lines in a system.</p>	3BSE078823R1	
<p>KNX Connect Data access to KNX devices connected via ABB KNX IP router. Only a limited set of KNX protocol functions are implemented. The 800xAserver node communicates over TCP/IP with the router. (Router is not included) A TSA is NEEDED to buy this item.</p>	3BSE078865R1	
<p>800xA for Advant Master Faceplates, graphical elements and means to communicate with the system. (One license per system.) 800xA for Advant Master hardware (PU410) needs to be ordered separately. Please refer to price book 3BSE001706, Advant OCS with Master Software.</p>	3BSE078816R1	

Base System

Connectivity

Connectivity	Article no.	
Advant Master Central Backup Backup and restore of applications for Advant Master controllers(AC410, AC450, MP200/1, SG400) One license per system. Requires 800xA for Advant Master.	3BSE078817R1	
800xA for Harmony Faceplates, graphical elements and means to communicate with the system.	3BSE078819R1	
800xA for AC 870P / Melody Graphical elements and means to communicate with the system (Faceplates not included) (One per system.)	3BSE078821R1	
800xA for MOD 300 Faceplates, graphical elements and means to communicate with the system. One license per system. 800xA for MOD 300 hardware (PU410/PU412) needs to be ordered separately. Please refer to price book 3BSE001709, Advant OCS with MOD 300 Software.	3BSE078818R1	
800xA for DCI Faceplates, graphical elements and means to communicate with the Harmony Distributed Control Unit (HDCU), includes: Batch connectivity, VB6 and PG2 faceplates, HDCU maintenance functions.	3BSE078820R1	
800xA for Safeguard Faceplates, graphical elements and means to communicate with the system. Note: Requires also 800xA for Advant Master.	3BSE078824R1	
800xA for AC 100 Faceplates, graphical elements and means to communicate with the AC 100 Controller, OPC server included. AC 100 OPC Server Hardware needs to be ordered separately. Please refer to price book 3BSE001706, Advant OCS with Master Software.	3BSE078825R1	

Base System

System Extensions

System Extensions	Article no.	
Multicore support These licenses were removed in conjunction with the release of 6.1, also for previous 800xA versions.	-	
Point of Control Collaboration based transfer of plant operation responsibility between locations and users.	3BSE078830R1	
800xA OPC Client Connection This enables third party OPC clients to connect to 800xA via the 800xA. OPC server, includes OPC DA, AE & HDA. One per external access.	3BSE078826R1	
OLE-DB Real Time Data Client Connection Allows realtime system data to be accessed via an OLE-DB interface. One per external access.	3BSE078827R1	
SMS and e-mail Messaging Sending messages based on alarm and event information to user devices such as mobile telephones, e-mail accounts and pagers.	3BSE078828R1	
Calculation Engine Provides the ability to run mathematical calculations on any available System 800xA aspect property or attribute. One license per server or redundant server pair.	3BSE078829R1	
Snapshot Reports Makes it possible to create aspects that automatically execute a query and produce a report consisting of properties of objects in the system.	3BSE078832R1	
CAD Viewer license View CAD drawings in DXF and DWG formats stored in aspects. DWG (version 13, 14, 2000, 2004, 2007, 2010) DXF (version 12, 13, 14, 2000, 2004, 2007, 2010)	3BSE079674R1	

Base System

Cyber Security

Cyber Security		Article no.	
	Digital Signature Makes it possible to digitally sign aspects to ensure that data is kept unchanged after approval.	3BSE078833R1	
	Advanced Access Control Reauthentication, double reauthentication and inactivity logout.	3BSE078834R1	
	Audit Trail Logging of all user initiated actions in a system. e.g. Graphics editing, Control Logic editing, Batch recipe editing and start/stop of servers etc.	3BSE078835R1	

Operations

Control Room Solutions



Control room operators make hundreds of decisions every working day – decisions that have a great impact on productivity, quality, and safety. What's more, the more alert, stimulated and harmonious they are, the better the decisions they make. For plant and control room managers, the key question is thus how to create and maintain operator well-being at levels that ensure their very best performance.

An operator environment designed with human factors in focus can convert potentially dangerous fatigue and distraction into proactive alertness that extracts the very best from every individual – in both routine operations and critical situations.

Operator well-being is a key success factor for safe, productive and reliable operations. 24/7 control room solutions designed for the long-run and built to last.

Equipment such as Control room equipment, chairs, desks, sound absorbers, cap desks, operator desks and other adjacent accessories. The

equipment is marketed along an extensive knowledge about control room design and human factors. Collaboration is a key word and is used from a workflow perspective, analyzing operations in normal and critical situations and how collaboration is enhanced through design are interesting values for the end user operations. The equipment itself might not be the main competitive advantage, but in combination with their know-how this offering is highly interested to almost any projects.

By involving ABB in a control room pre-study, you get the unique possibility to create a control room environment that perfectly suits your needs and individual situation of operations. The pre-study focuses on human factors interacting with 800xA and uses high standard control room equipment in a very cost efficient way.

Operator information overviews are built to match the physical dimensions and personal preferences of each individual. With motorized sit/stand desk-height, screen adjustment options, light and sound settings, each environment represents the ultimate in form and function. Designed to keep operators alert even during calm or monotonous periods, the desks and auxiliary products are bio-mechanically optimized, appealing to use and built to last.

The main purpose of this Product guide is to give a good overview and understanding of products specified to be used with 800xA. The offering includes other desk series and adjacent equipment suitable for 24/7 environments. To fully comply with project specification, we are able to customize desk to meet the desired requirements. Please contact CGM for support.

The Control Room Solution offering is being expanded due to our acquisition of CGM, a company that specializes in control room design and products.

Some products will remain visible in the Wizard for configuration purposes. During a transition period we kindly request you to use e-mail for orders and requests. The offering is available as hardware only, in a separate price book named Control room solutions.

Please send all questions related to control room solutions to SE-cgm-info@abb.com.



Operations

Operator Workplaces

Operator Workplaces	Article no.	
Operator Workplace – Additional Client Includes one local or remote operator workplace, Excel based reporting aspects, Microsoft Excel is NOT included. Use of up to 2 screens is included. The total quantity of Operator Workplaces, Large Operator Workplaces and Engineering Workplaces – must not exceed 80. License is needed for each concurrent user.	3BSE078749R1	
Large Operator Workplace Client Includes one local or remote Operator Workplace, with the possibility to use 3 or 4 screens and desktop with higher resolution than 1920*1200. The total quantity of Operator Workplaces, Large Operator Workplaces and Engineering Workplaces must not exceed 80. License is needed for each concurrent user.	3BSE078750R1	

Extended Operator Workplaces	Article no.	
The EOW specific hardware is during a transition period not available for ordering through BOL. Information and order of EOW hardware specific setup and configuration should be sent to SE-cgm-info@abb.com		
EOW-2 Workplace License Includes the Software licenses for an Extended operator workplace size 2, the following features are included: 2 Operator Workplace, 1 Large workplace, 1 Video Input channel, 3 Video Clients, 3 CAD viewer.	3BSE087745R1	
EOW-3 Workplace License Includes the Software licenses for an Extended operator workplace size 3, the following features are included: 3 Large workplace, 1 Video Input channel, 3 Video Clients, 3 CAD viewer.	3BSE087746R1	

Extended Operations	Article no.	
Alarm awareness light control (per area) Situation awareness with colored light showing the alarm priority. LED light combined with sound absorbers, covered surface approx 6 sqm. Including KNX connect and LED Lighting Control and Power Box. One license per area. A TSA is NEEDED to buy this item.	3BSE078868R1	
Alarm Operations, < 2000 Tags Alarm Grouping, Alarm Shelving and Basic Alarm Analysis. Alarm Help aspects. (Alarm Hiding and Alarm Response are parts of the base system)	3BSE078751R1	
Alarm Operations, < 5000 Tags Alarm Grouping, Alarm Shelving and Basic Alarm Analysis. Alarm Help aspects. (Alarm Hiding and Alarm Response are parts of the base system)	3BSE078751R2	
Alarm Operations, >= 5000 Tags Alarm Grouping, Alarm Shelving and Basic Alarm Analysis. Alarm Help aspects. (Alarm Hiding and Alarm Response are parts of the base system)	3BSE078751R3	

Operations

Extended Operations

Extended Operations	Article no.	
Alarm History and Reports, < 2000 Tags Long term Alarm storage and analyze, Alarm system KPI reports, web and e-mail distribution of reports.	3BSE078869R1	
Alarm History and Reports, < 5000 Tags Long term Alarm storage and analyze, Alarm system KPI reports, web and e-mail distribution of reports.	3BSE078869R2	
Alarm History and Reports, >= 5000 Tags Long term Alarm storage and analyze, Alarm system KPI reports, web and e-mail distribution of reports.	3BSE078869R3	
Symbol Factory for Process Graphics 2 Support for Symbol Factory graphics items in graphics displays.	3BSE080146R1	

Public Addressing	Article no.	
Public Addressing output channel One output channel with one language. The channel can convert alarms in alarmlists and predefined text messages to sound. The sound content can be configured differently for each output channel.	3BSE078808R1	
Public Addressing additional language One additional language for all channels.	3BSE078809R1	

Live Video System	Article no.	
Video Input Channel 1-10 Includes one software license needed to receive an IP addressed video stream to the video server. Article used to buy stream 1-10	3BSE087724R1	
Video Input Channel 11-25 Includes one software license needed to receive an IP addressed video stream to the video server. Article used to buy stream 11-25	3BSE087725R1	
Video Input Channel 26-50 Includes one software license needed to receive an IP addressed video stream to the video server. Article used to buy stream 26-50	3BSE087726R1	
Video Input Channel 51 - 500 Includes one software license needed to receive an IP addressed video stream to the video server. Article used to buy stream 51-500	3BSE087727R1	
Video View Client One concurrent client for viewing recorded or live video streams. Each client must have compatible video codec software installed.	3BSE079119R1	

Production Management

Batch Management

Batch Management	Article no.	
Batch Base System Provides the basic server functionality for Batch Management. The Batch Server includes 10 Batch Equipment. 1 Batch client included.	3BSE078752R1	
10 Additional Batch Equipment The number of batch equipment instances includes each piece of equipment configured in Batch Management including both Units and Shared Equipment Modules.	3BSE078756R1	
100 Additional Batch Equipment The number of batch equipment instances includes each piece of equipment configured in Batch Management including both Units and Shared Equipment Modules.	3BSE078757R1	
Batch Management Full Client This Client feature provides access to Batch Management functions. The Client feature is based upon concurrent users, not physical workstation installation. Including SL and SQL server licenses. Requires Operator Workplace Client or Engineering Workplace Client. Maximum 40 Clients. One Batch Client is included with the Batch Base System.	3BSE078754R1	
Redundant Batch Server Option Provides redundancy for the basic server functionality for batch management. Requires Batch Base System, item D010.	3BSE078753R1	
Batch Advanced Phase Templates This feature provides access to the Batch Advanced templates control modules for phases, units and shared equipment modules. For use with AC 800M controllers. Batch Phase Control library option, includes 2000 Advanced Phases.	3BSE078758R1	
Batch Schedule Interface Webservice interface to batch scheduling and equipment status. This feature is used to interface Batch Management to external applications such as schedulers and ERP systems.	3BSE078755R1	
Simple Batch Parameter Management Batch spreadsheet recipe scheduling tool for desktop PC interface to Batch Management using Excel. (Not required when Batch Schedule Interface is ordered)	3BSE079105R1	

Engineering

Standard Engineering Tools

Standard Engineering Tools	Article no.	
Engineering Workplace – Additional Client Includes Control Configuration for AC 800M, Bulk Data Handling, Graphic Configuration, Document Manager, Parameter Manager, I/O allocation function and Script Manager Professional. (one client is included with the Base system) The total quantity of Operator Workplaces-Additional and Remote Clients, Large Operator Workplaces and Engineering Workplaces – must not exceed 80.	3BSE078790R1	
Engineering Workplace with Application Change Management – Client Includes one Engineering Workplace and in addition Application Change Management. The total quantity of Operator Workplaces-Additional and Remote Clients, Large Operator Workplaces and Engineering Workplaces – must not exceed 80.	3BSE078810R1	
Engineering Workplace with Load Evaluate Go Includes one Engineering Workplace and license for Load Evaluate Go. The total quantity of Operator Workplaces-Additional and Remote Clients, Large Operator Workplaces and Engineering Workplaces - must not exceed 80. A TSA is NEEDED for a system with more than 60,000 tags.	3BSE079103R1	
Advanced Engineering Workplace – Client Includes one Engineering Workplace and licence for Application Change Management (ACM) and Load Evaluate Go (LEG). The total quantity of Operator Workplace-Additional and Remote Clients, Large Operator Workplaces and Engineering Workplaces – must not exceed 80. A TSA is NEEDED for a system with more than 60,000 tags.	3BSE079106R1	
SoftController To be used with the programming tool Control Builder M. This product is to be used as a test tool only. One license is required per SoftController.	3BSE078794R1	

Engineering

Engineering Systems

Engineering Systems	Article no.
Engineering System Small 6.0.3 An engineering system which only can run in engineering mode. System Small works with up to 5 engineering clients. License includes: Base system 120,000 tags singular/redundant 120,000 tags multisystem integration subscriber/provider Multi System Provider Connections, 10 Load evaluate go, Softpoint server, Point of control Snapshot reports AC 800M Connect, PLC Connect, 10 PLC Connect Dial-up, AC400 Connect, Harmony Connect, Melody Connect, MOD 300 Connect, Safeguard Connect, DCI Connect, Freelance 800F Connect, AC100 Connect Advant Master Central Backup 800xA OPC Client Connection, 10 OLE-DB Real Time Data-Client Connection, 10 IEC 61850 Connectivity, 1 200 IEDs (singular or redundant servers) Audit Trail, Advanced Access Control, Digital Signature SMS & Email Messaging, 800xA Event Forwarder, Calculation Engine Operator Clients, 80 Large Operator Clients, 39 EOW-x2 Operator Workplace, 25 EOW-x3 Operator Workplace, 17 Alarm Management, Alarm History & Reports CAD Viewer, 79 PG2 Symbol Factory Video Clients, 1 Video input channels, 1 Smart Client Workplace, 100 Public Address output channels, 20 Public Address languages, 10 cpmPlus Platform ECS Maximo plug-in ECS SAP plug-in History Signals, 150 000 Dual History Signals, 150 000 Data Access to Signals, 150 000 Soft Controller, 75 UDP Communication Library, 100 TCP Communication Library, 100 Burner Management Library, for 100 CPUs	3BSE092952R1

Engineering Systems	Article no.	
<p>INFI90 Function Code Library MOD 300 CCF Library for AC 800M</p> <p>Substation operation Library AC 800M High Integrity and Process Control, 75 Engineering Workplaces (incl. Control Builder M, Function Designer & Bulk Data Manager), 5 Application Change Management, (incl SQL Srv), 50 000 Graphics Builder, 5 Script Manager Professional, 5 Reuse Assistant, 5 Library Assistant, 5 Asset Monitors, 10 000 PC, Network, Software Monitoring, 2 000 tags</p> <p>Maximo integration SAP integration SAP / Plant Maintenance Integration Advanced Harmony Control System Monitoring CLAM Asset monitor, 500 Generic Heat Exchanger Asset Monitor, 20 HART Device Integration, 10 000 HART Multiplexer Connect Fieldbus Builder HART, 1 Foundation Fieldbus Device Integration, 10 000 Fieldbus Builder Foundation Fieldbus, 1 Profibus Device Integration, 10 000 Fieldbus Builder Profibus, 1</p> <p>Process Control Device Library, 12 000 PCDeviceLib App Engineering License , 12 000 Process Control Equipment Library With production management, 100 Process Control Equipment Library Without production management, 99 ProBase Software License, for 75 CPUs of any type Licenses for AC 800M Controllers and Communication interfaces, 50 of each</p>		

Engineering

Engineering Systems

Engineering Systems	Article no.
<p>Engineering System Large 6.0.3 An engineering system which only can run in engineering mode. System Large works with more than 5 engineering clients. License includes: Base system 120,000 tags singular/redundant 120,000 tags multisystem integration subscriber/provider Multi System Provider Connections, 10 Load evaluate go, Softpoint server, Point of control Snapshot reports</p> <p>AC 800M Connect, PLC Connect, 10 PLC Connect Dial-up, AC400 Connect, Harmony Connect, Melody Connect, MOD 300 Connect, Safeguard Connect, DCI Connect, Freelance 800F Connect, AC100 Connect</p> <p>Advant Master Central Backup 800xA OPC Client Connection, 10 OLE-DB Real Time Data-Client Connection, 10 IEC 61850 Connectivity, 1 200 IEDs (singular or redundant servers)</p> <p>Audit Trail, Advanced Access Control, Digital Signature SMS & Email Messaging, 800xA Event Forwarder, Calculation Engine</p> <p>Operator Clients, 80 Large Operator Clients, 39 EOW-x2 Operator Workplace, 25 EOW-x3 Operator Workplace, 17 Alarm Management, Alarm History & Reports</p> <p>CAD Viewer, 79 PG2 Symbol Factory Video Clients, 1 Video input channels, 1 Smart Client Workplace, 100 Public Address output channels, 20 Public Address languages, 10</p> <p>cpmPlus Platform ECS Maximo plug-in ECS SAP plug-in</p> <p>History Signals, 150 000 Dual History Signals, 150 000 Data Access to Signals, 150 000 Soft Controller, 75 UDP Communication Library, 100 TCP Communication Library, 100 Burner Management Library, for 100 CPUs</p> <p>INFI90 Function Code Library MOD 300 CCF Library for AC 800M Substation operation Library AC 800M High Integrity and Process Control, 75 Engineering Workplaces (incl. Control Builder M, Function Designer & Bulk Data Manager), 39 Application Change Management, (incl SQL Srv), 50 000 Graphics Builder, 5 Script Manager Professional, 5 Reuse Assistant, 10 Library Assistant, 5 Asset Monitors, 10 000 PC, Network, Software Monitoring, 2 000 tags</p>	3BSE092953R1

Engineering Systems	Article no.	
<p>Maximo integration SAP integration SAP / Plant Maintenance Integration Advanced Harmony Control System Monitoring CLAM Asset monitor, 500 Generic Heat Exchanger Asset Monitor, 20 Shell and Tube Heat Exchanger Asset Monitor, 20</p> <p>HART Device Integration, 10 000 HART Multiplexer Connect Fieldbus Builder HART, 1 Foundation Fieldbus Device Integration, 10 000 Fieldbus Builder Foundation Fieldbus, 1 Profibus Device Integration, 10 000 Fieldbus Builder Profibus, 1</p> <p>Process Control Device Library, 12 000 PCDeviceLib App Engineering License , 12 000 Process Control Equipment Library With production management, 100 Process Control Equipment Library Without production management, 99 ProBase Software License, for 75 CPUs of any type Licenses for AC 800M Controllers and Communication interfaces, 50 of each</p>		
<p>Batch Management Engineering, 6.0.3 Engineering mode license for Batch. License includes: Batch Server (singular/redundant) Batch Clients, 40 Batch Equipment, 1000 Batch Advanced phases, 20 000 Batch Spreadsheet Scheduler connections, 9 Batch schedule Interface</p>	3BSE092955R1	
<p>Information Management Engineering 6.0.3 Engineering mode license for IM Historian Server. License includes: IM Historian Server, 2 History logs (single/dual/consolidated) 100,000 Display Builder for MDI Client, 15 Multiscreen display interface (MDI), 150 Desktop Trends, 150 Excel Data Access, 150 ODBC Access to Historian Logs and Events, 3 ODBC-Client Connection OLE-DB Access to Historian Logs and Events OLE-DB-Client Connection, 60</p>	3BSE092956R1	

Engineering

Professional Engineering Tools

Professional Engineering Tools		Article no.	
Please Note! Aspect Studio and Aspect Express are not available in the price list. Please, contact your BU Area Sales Manager for quotation.			
	Reuse Assistant Wizard help for selection of reusable solutions.	3BSE078791R1	
	PETI – Base for INtools Process Engineering Tool Integration (PETI) Supports synchronization of properties between INtools objects and existing 800xA objects and property map definition changes. New 800xA object creation is NOT supported.	3BSE078792R1	
	PETI – New Object Creation Support Process Engineering Tool Integration (PETI) support for new 800xA object creation.	3BSE078793R1	

Information Management

Smart Client Workplaces		Article no.	
	Smart Client Workplaces - License for one smart client workplace for access to system information from the office network. Includes: View Process Graphics 2 displays, Trend displays, Build/view business graphics, historic data, alarm & events analyze (H & AE analyze requires IM)		
	Smart Client Workplace - Client 1-10	3BSE079531R10	
	Smart Client Workplace - Client 11-50	3BSE079531R50	
	Smart Client Workplace - Client 51-100	3BSE079531R100	

Information Management

System 800xA History

800xA History Signals – Logs		Article no.	
	History signals capable of storing actual and historic values retrieved from 800xA, Heritage ABB DCS systems and OPC sources. Each signal includes logging, trending, calculations and archiving. A signal is a numeric (Boolean, Integer or Real) data stored in the 800xA History server.		
	800xA History Signals – 100 logs	3BSE079539R1	
	800xA History Signals – 1,000 logs	3BSE079539R10	
	800xA History Signals – 15,000 logs	3BSE079539R150	

800xA Dual History Signals – Logs		Article no.	
	History signals for parallel logging in two history servers. Each signal includes logging, trending calculations and archiving for parallel logging in two history servers. A signal is a numeric (Boolean, Integer or Real) data stored in the 800xA History Server. The number of dual history signals should match the number of history signals that should be logged in two servers.		
	800xA History Dual Signals – 100 logs	3BSE079540R1	
	800xA History Dual Signals – 1,000 logs	3BSE079540R10	
	800xA History Dual Signals – 15,000 logs	3BSE079540R150	

Data access to 800xA History Signals – Logs		Article no.	
	For OPC UA: DA and HDA client is included. For OPC: DA, HDA client and server is included. In addition ODBC access to data stored in history signals is included.		
	Gives access to both the current and the historical values, and in addition Alarms and Events for the signals. (Same size as total number of 800xA History Signals).		
	800xA History Data Access – 100 logs	3BSE079541R1	
	800xA History Data Access – 1,000 logs	3BSE079541R10	
	800xA History Data Access – 15,000 logs	3BSE079541R150	

Information Manager

IM Historian Server

IM Historian Server	Article no.	
IM Historian Server Logging of signals for Operator trends is included in the core system for up to three months. Logging for a longer time period, archiving to external media like DVD, discs or web based Historian tools require Historian server. 500 logs are included.	3BSE078842R1	

History Logs	Article no.	
Each signal to be logged counts as one log.		
100 History Logs	3BSE078843R1	
1,000 History Logs	3BSE078843R2	
15,000 History Logs	3BSE078843R3	

Dual History Logs	Article no.	
Each signal to be logged counts as one log, for parallel logging in two history servers. (Two IM Historian Servers are required).		
100 Dual History Logs	3BSE078844R1	
1,000 Dual History Logs	3BSE078844R2	
15,000 Dual History Logs	3BSE078844R3	

Consolidated History Logs	Article no.	
Each signal to be logged counts as one log, for consolidated logs collect data from multiple History Servers and store it in a single location. This provides a common history repository for viewing and reporting.		
100 Consolidated History Logs	3BSE078845R1	
1,000 Consolidated History Logs	3BSE078845R2	
15,000 Consolidated History Logs	3BSE078845R3	

Information Manager

IM Historian

Convert History Logs to Dual History Logs	Article no.	
(Total max 150,000, and max 50,000/Server) Use this option when converting an existing systems single History Logs to Dual History Logs.		
100 Convert Single to Dual History Logs	3BSE079643R1	
1,000 Convert Single to Dual History Logs	3BSE079643R2	
15,000 Convert Single to Dual History Logs	3BSE079643R3	

Historian Display and Reporting Options	Article no.	
Display Builder for MDI – Additional Client Provides the ability to create Multi-Display Interface (MDI) information displays for desktop applications.	3BSE078846R1	
Multi-Display Interface – Additional Client Provides the ability to view Multi-Display Interface (MDI) information displays on any PC Desktop (Max 64 per server)	3BSE078847R1	
Desktop Trends – Additional Client Provides trend viewing for desktop applications. Includes web enabled trend display for long and short term history and stock ticker like viewer. (Max 64 per server)	3BSE078848R1	

Historian Data Access Options	Article no.	
Excel Data Access To access historical data through SQL from third party applications. Used to access historical data in Excel from non-800xA PC's. For 800xA Client PC's Excel Data Access is included. (Max 64 per server)	3BSE078849R1	
ODBC Historical Data Server Open Database Connection (ODBC) server which is needed for applications e.g. Batch Report that utilize commercial third party reporting tools. It includes 3rd party code (one per server). ODBC Clients are purchased separately from the ODBC server.	3BSE078850R1	
ODBC Client Connection Open Database Connection (ODBC) client which is needed for applications e.g. Batch Report that utilize commercial third party reporting tools. The number of client connections required is based on whether the applications utilize the connection directly or indirectly. If the connection is made indirectly (using Oracle), then the client connection requires only one. If the client connections are direct, then the number of clients should equal the number of concurrent users. ODBC Clients are purchased separately from the ODBC server (max 10 per ODBC server).	3BSE078851R1	

800xA 6.0 System

Safety

Enabler for combined PA Control and Certified Safety software	Article no.	
AC 800M High Integrity and Process Control lic. One fixed license feature per AC 800M controller running both non-SIL and SIL applications in the same controller.	3BSE078759R1	

800xA 6.0.3 System

Asset Optimization

Asset Optimization	Article no.	
100 Asset Monitors Asset monitoring and Basic Asset Monitor Library. Each Aspect Object being monitored by one or more asset monitors counts as one.	3BSE078871R1	
1000 Asset Monitors Asset monitoring and Basic Asset Monitor Library. Each Aspect Object being monitored by one or more asset monitors counts as one.	3BSE078871R2	
800xA Maximo Integration Enables integration into Maximo for work order management. Application Engineering available through ConsultIT.	3BSE078873R1	
800xA SAP / Plant Maintenance Integration Enables integration into SAP for work order management. Application Engineering available through ConsultIT.	3BSE078874R1	

Asset Optimization

Asset Monitors

Asset Monitors	Article no.	
Generic Heat Exchanger Asset Monitor It monitors the performance against standard operating parameters independent of type of heat exchanger.	3BSE078875R1	
Shell/Tube Heat Exchanger Asset Monitor It monitors the performance against standard operating parameters based on the size of shell and tube heat exchanger.	3BSE078876R1	
Advanced Harmony System Monitoring Enables Harmony Control Network monitors for diagnostic monitoring, reporting, and analysis	3BSE078877R1	
100 Control Loop Asset Monitors Each Control Loop Asset Monitor monitors and assesses the performance of a control loop in real-time and report significant problems related to the control loop and final control element. The total quantity of Control Loop Asset Monitors must not exceed 500.	3BSE078878R100	
300 Control Loop Asset Monitors Each Control Loop Asset Monitor monitors and assesses the performance of a control loop in real-time and report significant problems related to the control loop and final control element. The total quantity of Control Loop Asset Monitors must not exceed 500.	3BSE078878R300	
500 Control Loop Asset Monitors Each Control Loop Asset Monitor monitors and assesses the performance of a control loop in real-time and report significant problems related to the control loop and final control element. The total quantity of Control Loop Asset Monitors must not exceed 500.	3BSE078878R500	
PC, Network and Software Monitoring Enables availability monitoring of IT assets, like servers and workstations, network and software components.	3BSE078879R1	

800xA 6.0 System

Device Management & Fieldbuses

Device Management HART	Article no.	
For HART devices to be accessed using HART Device Type Manager (DTM's) within System 800xA. Includes HART Device Library with generic and specific HART Device Aspect Objects incl. DTM's, I/O DTM for S800 and S900, HART Instruments Asset Monitor Library and OPC Server. Each HART device aspect object accessed with DTM counts as one. (Max 1000 per Connectivity Server when OPC Communication is used.)		
100 HART Device Aspect Objects	3BSE078880R1	
1,000 HART Device Aspect Objects	3BSE078880R2	
10,000 HART Device Aspect Objects	3BSE078880R3	
HART Multiplexer Connect Enables HART Device Integration to connect to HART devices via HART Multiplexers.	3BSE078881R1	

800xA 6.0 System

Device Management & Fieldbuses

Device Management FOUNDATION Fieldbus		Article no.	
	For FOUNDATION Fieldbus (FF) devices to be accessed using Fieldbus Builder FF within System 800xA. Includes FF Device Library with FF Device Aspect Objects, FF Instruments Asset Monitor Library and OPC Server. Each FF device aspect object counts as one. (Max 1000 per Connectivity Server. For details refer to System Guide.)		
	100 FF Device Aspect Objects	3BSE078882R1	
	1,000 FF Device Aspect Objects	3BSE078882R2	
	10,000 FF Device Aspect Objects	3BSE078882R3	

Device Management PROFIBUS		Article no.	
	For PROFIBUS DP/PA devices to be accessed using Device Type Manager (DTM's) within System 800xA. Includes PROFIBUS Device Library with specific PROFIBUS Device Aspect Objects incl. DTM's, I/O DTM for S800 and S900, and PROFIBUS Instruments Asset Monitor Library. Each PROFIBUS device aspect object accessed with DTM counts as one. (Max 2500 per Connectivity Server if OPC communication is used. For details refer to System Guide.)		
	100 PROFIBUS Device Aspect Objects	3BSE078883R1	
	1,000 PROFIBUS Device Aspect Objects	3BSE078883R2	
	10,000 PROFIBUS Device Aspect Objects	3BSE078883R3	

IEC 61850-Ed1 Connect		Article no.	
	For operation client to access data and alarm and event values from intelligent Electronic Devices (IEDs) according to IEC 61850-Ed1 (Edition 1) within System 800xA.		
	IEC 61850-Ed1 Connect Allows operation clients to access data and alarm and event values from Intelligent Electronic Devices (IEDs) according IEC 61850 Edition 1. Package includes IEC 61850 OPC server software with configuration tool on Connectivity Servers. One license per OPC Server instance.	3BSE078884R1	
	Redundant IEC 61850-Ed1 Connect Option Allows operation clients to access data and alarm and event values through redundant OPC-servers from Intelligent Electronic Devices (IEDs) according IEC 61850 Edition1. Package includes IEC 61850 OPC server software with configuration tool on Connectivity Servers. One license per OPC Server instance.	3BSE078885R1	

800xA 6.0 System

Libraries

Libraries	Article no.	
INFI90 Function Code Library for AC 800M Control functions, faceplates and graphics elements that makes it easier to create functionality that has earlier been configured in an INFI90 system. Media is downloaded separately.	3BSE078890R1	
MOD 300 CCF Library for AC 800M Control functions, faceplates and graphics elements that makes it easier to create functionality that has earlier been configured in a MOD300 system. Media is downloaded separately.	3BSE078889R1	
TCP Communication Library License Control functions to create TCP based communication protocols in the AC800M controller. One licence is needed for each controller using the library.	3BSE079542R1	
UDP Communication Library License Control functions to create UDP based communication protocols in the AC 800M controller. One licence is needed for each controller using the library.	3BSE079543R1	
PM867 Burner Management Library License Control functions for burner management applications. One license is needed for each PM867 using the library.	3BSE086363R1	

Localization

National Language Support (NLS) is intended for the localization of the operator interface to the desired language. NLS contains a set of functions that are harmonized with the Windows regional settings to enable a multilingual environment for the ABB Ability™ System 800xA®.

The System 800xA supports translations, mainly the operator interface and the operator manuals as shown in the Table 3 and Table 4. The translation, or System 800xA Language Package, is implemented as a system extension and is possible to install without stopping the system.

The NLS Localization Guide describes what and how localization can be performed by a project with or without an installed Language Package. The English version of the Windows operating system is required. The System 800xA Language Packages can be downloaded free of charge from ABB Library.

It is always advisable to download full Language Package from ABB Library or advised, for each new installation to secure the latest updates for language packages.

Table 3. Supported Language Packages for Functional Areas

Language Packages	Functional Areas							
	Base System	*Safety	SMS & eMailing	**Asset Optimization	FOUNDATION FIELDBUS	Batch Management	*** Information Management	SFC Viewer
English (default)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Arabic	Yes	Yes						Yes
Chinese	Yes	Yes		Yes	Yes	Yes	Yes	Yes
French	Yes	Yes	Yes				Yes	Yes
German	Yes	Yes	Yes	Yes		Yes	Yes	Yes
Russian	Yes	Yes					Yes	Yes
Spanish	Yes	Yes	Yes				Yes	Yes
Swedish	Yes	Yes	Yes			Yes	Yes	Yes

* Confirmation and authentication operation dialog Window for SIL-2 high integrity controller.

** Only system messages

*** Storage of messages in local language

Table 4. Supported Language Packages for Connectivity

Language Packages	Connectivity			
	800xA for AC 800M	800xA for Advant Master	PLC Connect	800xA for Melody
English (default)	Yes	Yes	Yes	Yes
Arabic	Yes			
Chinese	Yes	Yes	Yes	
French	Yes	Yes		
German	Yes	Yes		Yes
Russian	Yes	Yes		
Spanish	Yes			
Swedish	Yes	Yes		

NLS language packs: NLS language is EN (English) by default. Other NLS Languages (Arabic, Chinese, French, German, Russian, Spanish and Swedish) are made available within 12 months after the initial software version release. The order in which they are created is driven by global project requirements.

AC 800M Processor Units

CPU Modules

Several CPU modules are available that vary in terms of processing power, memory size, and redundancy support. Each CPU module is equipped with built in Ethernet port(s) for communication with other controllers and for interaction with operators, engineers, managers, and higher level applications. These ports can be configured for redundancy for those cases where availability is of paramount importance. It is also equipped with two RS-232C ports that can be used for point-to-point communication with programming/debugging tools and with third-party systems and devices.

The SIL3-rated and IEC61508-certified, AC 800HI controller supports running both process control and safety application, in the same machine.

The AC 800M controller can be configured with 800xA control builder. When configured with the 800xA control builder AC 800M becomes a tightly integrated part of the System 800xA.

Communication & I/O Modules

To each CPU module, a number of communication and I/O modules can be added, for example:

- Additional RS-232C ports
- PROFIBUS DP, PROFINET IO
- Foundation Fieldbus HSE/H1
- DeviceNet
- IEC 61850
- Ethernet IP
- MasterBus 300
- MODBUS TCP
- S100 I/O
- S800 I/O
- S800L I/O
- S900 I/O



AC 800M PM891 controller



AC 800M controller



AC 800M High Integrity

AC 800M Controllers selection guide

Features / CPUs	PM851A	PM856A	PM858	PM860A	PM861A	PM862
Processor Unit	PM851AK01 incl: 1 PM851 CPU and required optional items	PM856AK01 incl: 1 PM856 CPU and required optional items	PM858K01 incl: 1 PM858 CPU and required optional items PM858K02 incl: 2 PM858K01	PM860AK01 incl: 1 PM860 CPU and required optional items	PM861AK01 incl: 1 PM861A CPU and required optional items PM861AK02 incl: 2 PM861AK01	PM862K01 incl: 1 PM862 CPU and required optional items. PM862K02 incl: 2 PM862K01
Optional items (partly included in Processor Units, see Price List)	TP830 Baseplate, TP850 CEX-bus term., TK850 CEX-bus cable, TB807, Modulebus term, Battery RAM backup, TB852/TB853 RCU-link term, TB851/TB855/TB856 RCU-link cable, SB822 External Battery Unit, TK212A Tool cable, TC562 Short Distance Modem, TK853V020 Modem cable, BC810K02, BC820K02, CEX-bus Interconnection unit; TK851V010 Connection cable, SD831/SD832/SD833 Power Supply, SS832 Voting Unit, Mains Breaker Kit, SM811 Supervisory Module and SM812 Supervisory Module.					
High Integrity Controller	No	No	No	No	No	No
Clock frequency	24 MHz	24 MHz	33 MHz	48 MHz	48 MHz	67 MHz
Memory (RAM)	8 MB	8 MB	16MB	8 MB	16 MB	32 MB
From 5.1 FP4	12 MB	16 MB		16 MB		
RAM available for application	2.282 MB	2.282 MB	7.147 MB	2.282 MB	7.155 MB	23.521 MB
From 5.1 FP4	6.253 MB	10.337 MB		10.346 MB		
Processor type	MPC860	MPC860	MPC866	MPC860	MPC860	MPC866
Flash memory for storage of application and data	Yes	Yes	Yes	Yes	Yes	Yes
CPU redundancy support	No	No	Yes	No	Yes	Yes
Switch over time in red. conf.	-	-	max 10 ms	-	max 10 ms	max 10 ms
Performance, 1000 boolean operations (a:=b and c)	0.46 ms	0.46 ms	0.36 ms	0.23 ms	0.23 ms	0.18 ms
No. controllers per control projects	32					
No. of applications per control project	1024					
No. of applications per controller	32					
No. of programs per application	64					
No. of tasks per controller	32					
Number of different cycle times	32					
Cycle time per application programs	Down to 1 ms					
Flash PROM for firmware storage	2 MB	2 MB	4 MB	2 MB	2 MB	4 MB
Power supply	24 V DC (19.2-30 V DC) max 5 % ripple acc. to IEC 61131-2					
Power consumption +24 V	typ/max 180/300 mA	typ/max 180/300 mA	typ/max 210/360 mA	typ/max 180/300 mA	typ/max 250/430 mA	typ/max 210/360 mA
Power dissipation	typ 4.32 W	typ 4.32 W	typ 5.1 W	typ 4.32 W	typ 6.0 W	5.1 W
Power Reservoir	Internal 5 ms power reservoir, sufficient for the CPU to make a controlled power down					
Power supply connector	Detachable 4-pole screw terminal block					
Redundant power supply status inputs	Yes: 2 inputs designated SA, SB (Max 30 V, high level >15 V, low level < 8 V)					
Built-in back-up battery	Type: Lithium, 3.6 V, 0.95 Ah, size 1/2 AA, 0.3 g Lithium content					
Real-time clock stability	100 ppm (approx. 1 h/year)					
Clock synchronization	1 ms between AC 800M controllers by CNCP protocol					
Comm. modules on CEX bus	1	12	12	12	12	12
Supply current on CEX bus	Supply current: Max 24 V - 2.4 A (fuse 3.15 A fast, PM891 has an embedded auto fuse)					
I/O clusters on Modulebus with non-redundant CPU	1 el. + 1 opt.	1 el. + 7 opt.	1 el. + 7 opt.	1 el. + 7 opt.	1 el. + 7 opt.	1 el. + 7 opt.
I/O clusters on Modulebus with redundant CPU	NA	NA	7 optical	NA	0 el. + 7 opt.	7 optical


Features / CPUs	PM851A	PM856A	PM858	PM860A	PM861A	PM862
I/O capacity on Modulebus with non-redundant/redundant CPU	Max 24/NA I/O modules	Max 96/NA I/O modules	Max 96/84 I/O modules	Max 96/NA I/O modules	Max 96/84 I/O modules	Max 96/84 I/O modules
Modulebus scan rate	0 - 100 ms (actual time depending on number of I/O modules)					
Supply current on Electrical Modulebus	Supply current: Max 24 V - 1.0 A (short circuit proof, fuse 2.0 A), Max 5 V - 1.5 A (short circuit proof)					
I/O capacity on PROFIBUS (remote I/O)	Max 99 I/O stations (max 62 redundant I/O stations), max 24 I/O modules per I/O station (max 12 redundant I/O pairs)					
Ethernet channels	1	2	2	2	2	2
Ethernet interface	Ethernet (IEEE 802.3), 10 Mbit/s, RJ-45, female (8-pole)					
Control Network protocol	MMS (Manufacturing Message Service) and IAC (Inter Application Communication)					
Recommended Control Network backbone	100 Mbit/s switched Ethernet					
No. of controllers on Control Network	max 50					
RS-232C interface	2 (one general, 1 for service tool)					
RS-232C interface (COM3) (non red.conf. only)	RS-232C, 75-19 200 baud, RJ-45 female (8-pole), not opto isolated, full RTS-CTS support					
RS-232C interface (COM4) (non red.conf. only)	RS-232C, 9 600 baud, RJ-45 female (8-pole), opto isolated, no RTS-CTS support					
Temperature <ul style="list-style-type: none"> • Operating • Storage 	+5 to +55 °C (+41 to +131 °F) -40 to +70 °C (-40 to +158 °F)					
Temperature changes	3 °C/minutes according to IEC/EN 61131-2					
Altitude	2000 m according to IEC/EN 61131-2					
Pollution degree	Degree 2 according to IEC/EN 61131-2					
Corrosion protection	G3 compliant to ISA 71.04					
Vibration	10 < f < 50 Hz: 0.0375 mm amplitude, 50 < f < 150 Hz: 0.5 g acceleration, 5 < f < 500 Hz: 0.2 g acceleration					
Emitted noise	< 55 dB (A)					
Shock, no package	150 m/s ² in 11 ms, 20 g in 3 ms					
Relative humidity	5 to 95 %, non-condensing					
Isolation voltage	Type test voltage: 500 V AC (corresponding to 700 V DC)					
Environmental conditions	Industrial					
Protection class	IP20 according to EN 60529, IEC 529					
Certificates and Standards	CE- marking: Meets EMC directive 2004/108/EC acc. to EN 61000-6-4, EN 61000-6-2 and Low Voltage Directive acc. to EN 61131-2 Electrical Safety: EN 50178, IEC 61131-2, UL 508 Hazardous location: UL 60079-15, cULus Class 1, Zone 2, AEx nA IIC T4, ExnA IIC T4Gc X					
TÜV Approval	No	No	No	No	No	No
Emission	Tested according to EN 61000-6-4 EMC – Generic Emission Standard, Part 2 – Industrial Environment					
Immunity	Tested according to EN 61000-6-2 EMC – Generic Immunity Standard, Part 2 – Industrial Environment					
Dimensions	Width 119 x Height 186 x Depth 135 mm (4.7 x 7.3 x 5.3 in.)					
Weight (including base)	1100 g (2.4 lbs)	1100 g (2.4 lbs)	1200 g (2.6 lbs)	1100 g (2.4 lbs)	1200 g (2.6 lbs)	1200 g (2.6 lbs)

AC 800M Controllers selection guide

Features / CPUs	PM864A	PM865	PM866A	PM867	PM891
Processor Unit	PM864AK01 incl: 1 PM864A CPU and required optional items PM864AK02 incl: 2 PM864AK01	PM865K01 incl: 1 PM865 CPU and required optional items PM865K02 incl: 2 PM865K01	PM866AK01 incl: 1 PM866A CPU and required optional items PM866AK02 incl: 2 PM866AK01	PM867K01 incl: 1 PM867 CPU and required optional items PM867K02 incl: 2 PM867K01	PM891K01 incl: 1 PM891 CPU and required optional items PM891K02 incl: 2 PM891K01
Optional items (partly included in Processor Units, see Price List)	TP830 Baseplate, TP850 CEX-bus term., TK850 CEX-bus cable, TB807, Modulebus term, Battery RAM backup, TB852/TB853 RCU-link term, TB851/TB855/TB856 RCU-link cable, SB822 External Battery Unit, TK212A Tool cable, TC562 Short Distance Modem, TK853V020 Modem cable, BC810K02, BC820K02, CEX-bus Interconnection unit; TK851V010 Connection cable, SD831/SD832/SD833 Power Supply, SS832 Voting Unit, Mains Breaker Kit, SM811 Supervisory Module and SM812 Supervisory Module.				
High Integrity Controller	No	Yes	No	Yes	No
Clock frequency	96 MHz	96 MHz	133 MHz	133 MHz	450 MHz
Memory (RAM) From 5.1 FP4	32 MB	32 MB	64 MB	64 MB	256 MB
RAM available for application	23.522 MB	22.184 MB	51.389 MB	46.559 MB	208.985 MB
Processor type	MPC862	MPC862P	MPC866	MPC866	MPC8270
Flash memory for storage of application and data	Yes	No	Yes	No	Yes
CPU redundancy support	Yes	Yes	Yes	Yes	Yes
Switch over time in red. conf.	max 10 ms	max 10 ms	max 10 ms	max 10 ms	max 10 ms
Performance, 1000 boolean operations (a:=b and c)	0.15 ms	0.17 ms	0.09 ms	0.09 ms	0.043 ms
No. controllers per control projects	32				
No. of applications per control project	1024				
No. of applications per controller	32				
No. of programs per application	64				
No. of tasks per controller	32				
Number of different cycle times	32				
Cycle time per application programs	Down to 1 ms				
Flash PROM for firmware storage	2 MB	4 MB	4 MB	18 MB	16 MB
Power supply	24 V DC (19.2-30 V DC) max 5 % ripple acc. to IEC 61131-2				
Power consumption +24 V	typ/max 287/487 mA	typ/max 287/487 mA	typ/max 210/360 mA	typ/max 210/360 mA	typ/max 660/750 mA
Power dissipation typ.	6.9 W	6.9 W	5.1 W	5.1 W	15.8 W
Power Reservoir	Internal 5 ms power reservoir, sufficient for the CPU to make a controlled power down				
Power supply connector	Detachable 4-pole screw terminal block				
Redundant power supply status inputs	Yes: 2 inputs designated SA, SB (Max 30 V, high level >15 V, low level < 8 V)				
Built-in back-up battery	Type: Lithium, 3.6 V, 0.95 Ah, size 1/2 AA, 0.3 g Lithium content				No
Real-time clock stability	100 ppm (approx. 1 h/year)				50 ppm
Clock synchronization	1 ms between AC 800M controllers by CNCP protocol				
Comm. modules on CEX bus	12	12	12	12	12
Supply current on CEX bus	Supply current: Max 24 V - 2.4 A (fuse 3.15 A fast, PM891 has an embedded auto fuse)				
I/O clusters on Modulebus with non-redundant CPU	1 el. + 7 opt.	1 el. + 7 opt.	1 el. + 7 opt.	1 el. + 7 opt.	0 el. + 7 opt.
I/O clusters on Modulebus with redundant CPU	0 el. + 7 opt.	0 el. + 7 opt.	0 el. + 7 opt.	0 el. + 7 opt.	0 el. + 7 opt.
I/O capacity on Modulebus with non-redundant/ redundant CPU	Max 96/84 I/O modules	Max 96/84 I/O modules	Max 96/84 I/O modules	Max 96/84 I/O modules	Max 84/84 I/O modules

Features / CPUs	PM864A	PM865	PM866A	PM867	PM891
Modulebus scan rate	0 - 100 ms (actual time depending on number of I/O modules), 0 - 300 for PM865 and PM867				
Supply current on Electrical Modulebus	Supply current: Max 24 V - 1.0 A (short circuit proof, fuse 2.0 A), Max 5 V - 1.5 A (short circuit proof)			24 V : max 1.0 A 5 V : max 1.5 A	Not supported
I/O capacity on PROFIBUS (remote I/O)	Max 99 I/O stations (max 62 redundant I/O stations), max 24 I/O modules per I/O station (max 12 redundant I/O pairs)				
Ethernet channels	2	2	2	2	2
Ethernet interface	Ethernet (IEEE 802.3), 10 Mbit/s, RJ-45, female (8-pole)				10/100 Mbit/s
Control Network protocol	MMS (Manufacturing Message Service) and IAC (Inter Application Communication)				
Recommended Control Network backbone	100 Mbit/s switched Ethernet				
No of controllers on Control Network	max 50				
RS-232C interface	2 (one general, 1 for service tool)				1 for service tool (COM 4)
RS-232C interface (COM3) (non red.conf. only)	RS-232C, 75-19 200 baud, RJ-45 female (8-pole), not opto isolated, full RTS-CTS support				Not supported
RS-232C interface (COM4) (non red.conf. only)	RS-232C, 9 600 baud, RJ-45 female (8-pole), opto isolated, no RTS-CTS support				
Temperature <ul style="list-style-type: none">• Operating• Storage	+5 to +55 °C (+41 to +131 °F) -40 to +70 °C (-40 to +158 °F)				
Temperature changes	3 °C/minutes according to IEC/EN 61131-2				
Altitude	2000 m according to IEC/EN 61131-2				
Pollution degree	Degree 2 according to IEC/EN 61131-2				
Corrosion protection	G3 compliant to ISA 71.04				
Vibration	10 < f < 50 Hz: 0.0375 mm amplitude, 50 < f < 150 Hz: 0.5 g acceleration, 5 < f < 500 Hz: 0.2 g acceleration				
Emitted noise	< 55 dB (A)				
Shock, no package	150 m/s2 in 11 ms, 20 g in 3 ms				
Relative humidity	5 to 95 %, non-condensing				
Isolation voltage	Type test voltage: 500 V AC (corresponding to 700 V DC)				
Environmental conditions	Industrial				
Protection class	IP20 according to EN 60529, IEC 529				
Certificates and Standards	CE- marking: Meets EMC directive 2004/108/EC acc. to EN 61000-6-4, EN 61000-6-2 and Low Voltage Directive acc. to EN 61131-2 Electrical Safety: EN 50178, IEC 61131-2, UL 508 Hazardous location: UL 60079-15, cULus Class 1, Zone 2, AEx nA IIC T4, ExnA IIC T4Gc X				
TÜV Apparoval	No	IEC 61508 SIL3	No	IEC 61508 SIL3	No
Emission	Tested according to EN 61000-6-4 EMC – Generic Emission Standard, Part 2 – Industrial Environment				
Immunity	Tested according to EN 61000-6-2 EMC – Generic Immunity Standard, Part 2 – Industrial Environment				
Dimensions	Width 119 x Height 186 x Depth 135 mm (4.7 x 7.3 x 5.3 in.)				Width 174 x Height 186 x Depth 94 mm
Weight (including base)	1100 g (2.4 lbs)	1200 g (2.6 lbs)	1200 g (2.6 lbs)	1200 g (2.6 lbs)	1600 g (3.5 lbs)

Measurements

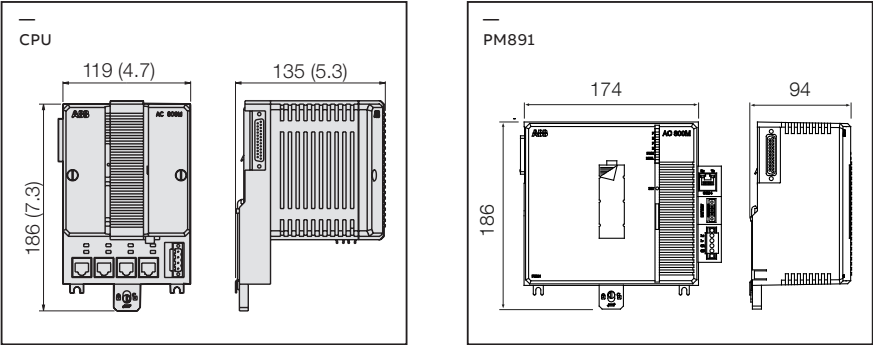


AC 800M Hardware

Hardware Upgrade orders

AC 800M Hardware	Please note that this Hardware Price List can be used for both System 800xA v5 and System 800xA v6. No licenses are included for the items in this Price List. Licenses for running the Hardware can be purchased using the Software Expansion Lists.
Hardware Upgrade orders	For Hardware Upgrade orders please send your inquiry to Service Center mail box: offer.selog@se.abb.com
ISA-S71.04 level G3 Compliance	Modules are compliant to ISA-S71.04 level G3, unless explicitly stated differently.
Extended Warranty for AC 800M Hardware	We can offer an extended warranty for one, two, or three years in addition to normal warranty conditions for AC 800M Hardware. See price list Extended Warranty.


AC 800M Hardware

System Units

System Units	
	The Tool Cable TK212A is most useful when working with AC 800M. Please order a cable (Item P215) together with your first order of PM851AK01, PM856AK01, PM858K01, PM858K02, PM860AK01, PM861AK01, PM861AK02, PM862K01, PM862K02, PM864AK01, PM864AK02, PM866AK01, PM866AK02, PM867K01, PM867K02, PM891K01 or PM891K02.

AC 800M Hardware


AC 800M Processor Units

AC 800M Processor Units		Article no.	
	PM851AK01 Processor Unit 24 Mhz and 12 MB Package including: <ul style="list-style-type: none">• PM851A, CPU• TP830, Baseplate, width=115 mm• TB850, CEX-bus terminator• TB807, ModuleBus terminator• Battery for memory backup (4943013-6)• No license included.	3BSE066485R1	
	PM856AK01 Processor Unit 24 MHz and 16 MB Package including: <ul style="list-style-type: none">• PM856A, CPU• TP830, Baseplate, width=115 mm• TB850, CEX-bus terminator• TB807, ModuleBus terminator• Battery for memory backup (4943013-6)• No license included.	3BSE066490R1	

AC 800M Hardware







AC 800M Processor Units



AC 800M Processor Units		Article no.	
	PM858K01 Processor Unit 33 MHz and 16 MB Package including: <ul style="list-style-type: none"> • PM858, CPU • TP830, Baseplate, width ≈115mm • TB850, CEX-bus terminator • TB807, ModuleBus terminator • TB852, RCU-Link terminator • Battery for memory backup (4943013-6) • No license included. Only compatible with 800xA 6.0.2, Compact Control Builder 6.0.0-1 and onwards. Please see Product Update for more information	3BSE082895R1	
	PM858K02 Redundant Processor Units 33 MHz and 16 MB Package including: <ul style="list-style-type: none"> • 2 pcs PM858, CPU • 2 pcs TP830, Baseplate, width ≈115mm • 2 pcs TB807, ModuleBus terminator • 1 pcs TK850, CEX-bus expansion cable • 1 pcs TK851, RCU-Link cable • 2 pcs Battery for memory backup (4943013-6) • No license included. Only compatible with 800xA 6.0.2, Compact Control Builder 6.0.0-1 and onwards. Please see Product Update for more information	3BSE082896R1	
	PM860AK01 Processor Unit 48 MHz and 16 MB Package including: <ul style="list-style-type: none"> • PM860A, CPU • TP830, Baseplate, width=115 mm • TB850, CEX-bus terminator • TB807, ModuleBus terminator • Battery for memory backup (4943013-6) • No license included. 	3BSE066495R1	
	PM862K01 Processor Unit 67 MHz and 32 MB Package including: <ul style="list-style-type: none"> • PM862, CPU • TP830, Baseplate, width ≈115mm • TB850, CEX-bus terminator • TB807, ModuleBus terminator • TB852, RCU-Link terminator • Battery for memory backup (4943013-6) • No license included. Only compatible with 800xA 6.0.2, Compact Control Builder 6.0.0-1 and onwards. Please see Product Update for more information.	3BSE076940R1	
	PM862K02 Redundant Processor Units 67 MHz and 32 MB Package including: <ul style="list-style-type: none"> • 2 pcs PM862, CPU • 2 pcs TP830, Baseplate, width ≈115mm • 2 pcs TB807, ModuleBus terminator • 1 pcs TK850, CEX-bus expansion cable • 1 pcs TB851, RCU-Link cable • 2 pcs Battery for memory backup (4943013-6) • No license included. Only compatible with 800xA 6.0.2, Compact Control Builder 6.0.0-1 and onwards. Please see Product Update for more information.	3BSE081636R1	





AC 800M Hardware

AC 800M Processor Units

AC 800M Processor Units		Article no.	
	PM866AK01 Processor Unit 133 MHz and 64 MB Package including: <ul style="list-style-type: none">• PM866A, CPU• TP830, Baseplate, width =115mm• TB850, CEX-bus terminator• TB807, ModuleBus terminator• TB852, RCU-Link terminator• Battery for memory backup (4943013-6)• No license included.	3BSE076939R1	
	PM866AK02 Redundant Processor Units 133 MHz and 64 MB Package including: <ul style="list-style-type: none">• 2 pcs PM866A, CPU• 2 pcs TP830, Baseplate, width =115mm• 2 pcs TB807, ModuleBus terminator• 1 pcs TK850, CEX-bus expansion cable• 1 pcs TB851, RCU-Link cable• 2 pcs Battery for memory backup (4943013-6)• No license included.	3BSE081637R1	
	PM891K01 Processor Unit 450 MHz and 256 Mb Package including: <ul style="list-style-type: none">• PM891 CPU Module• TB850, CEX-bus terminator• TB853, RCU Control Link Terminator• No license included	3BSE053241R1	
	PM891K02 Redundant Processor Unit 450 MHz and 256 MB Package including: <ul style="list-style-type: none">• 2 pcs PM891K01 Processor Unit• 1 pcs TK850V007 CEX-bus Extension Cable• 1 pcs TK855 RCU Data Link Cable• 1 pcs TK856 RCU Control Link Cable• No license included Please note: The BC810K02 is not included in the PM891K02 Redundant Processor Unit kit. In order to make hot replacement of PM891 Processor Unit possible, the BC810K02 is required and has to be ordered separately.	3BSE053242R1	
	SB822 Rechargeable battery unit External DIN-rail mounted rechargeable battery unit including lithium-ion battery, 24V DC connector and connection cable TK821V020. Width=85 mm. Equivalent amount of Lithium metal=0,8g (0,03oz)	3BSE018172R1	
	MB803V4 Compact Flash Card 4GB Compact Flash memory card for AC 800M controllers. Size 4 GB. Replaces the MB801V512 Compact Flash Card (3BSE042257R1)	2PAA121688R1	

System Units

AC 800M High Integrity Units

AC 800M High Integrity Units		Article no.	
	<p>The PM867 CPU unit and SM812 are intended for use in High Integrity systems. High integrity, certified for SIL3. Requires configuration according to Safety Manual. Local organizations must comply with the Qualifications to secure successful sales of ABB safety systems, to order safety equipment.</p>		
	<p>PM867K01 Processor Unit 133 MHz and 64 MB Package including:</p> <ul style="list-style-type: none"> • PM867, CPU • TP830, Baseplate, width =115mm • TB850, CEX-bus terminator • TB807, ModuleBus terminator • TB852, RCU-Link terminator • Battery for memory backup (4943013-6) • No license included. <p>Only compatible for 800xA 6.0.2 and onwards. Please see Product Update for more information.</p>	3BSE076355R1	
	<p>PM867K02 Redundant Processor Units 133 MHz and 64 MB Package including:</p> <ul style="list-style-type: none"> • 2 pcs PM867, CPU • 2 pcs TP830, Baseplate, width =115mm • 2 pcs TB807, ModuleBus terminator • 1 pcs TK850, CEX-bus expansion cable • 1 pcs TB851, RCU-Link cable • 2 pcs Battery for memory backup (4943013-6) • No license included. <p>Only compatible for 800xA 6.0.2 and onwards. Please see Product Update for more information.</p>	3BSE081638R1	
	<p>SM812K01 Safety CPU module kit Collaborating safety CPU with PM867 processor unit. Package including:</p> <ul style="list-style-type: none"> • SM812, Safety Module • TP868, Baseplate, width=60mm • TK852V10, Synchronization link cable <p>Only compatible for 800xA 6.0.2 and onwards. Please see Product Update for more information.</p>	3BSE072270R1	
	<p>SS823 Voting Device Required in a High Integrity 800xA system. One per power supply unit, also at redundant configurations. Input d.c. 24 V. Dual 24 V to single 24 V, 20A. DIN rail mounted.</p>	3BSE038226R1	

System Units

Extra Batteries

Extra Batteries



For extra Lithium batteries (4943013-6), please refer to Business Online (BOL).

Communication




Control Network

Control Network

No articles, such as cables, hubs, switches etc, for Control Network are included in this price list. Please refer to Product Guide AC 800M, for recommended articles.
Recommended network components are available in the 800xA Networks price list.

Communication

Serial Interfaces on TP830

Serial Interfaces on TP830		Article no.	
  	RS232-C interfaces for protocols COMLI, MODBUS, Siemens 3964R, the free-programmable serial protocol etc. Also for connection of engineering tool.		
	TK212A Tool cable RJ45 8P8C plug Used to connect a PC to CI801, CI840 or CI840A for download of software. Download to CI801 requires a TK527V030 in addition. RJ45 (male) to Dsub-9 (female), length 3 m. RJ45 8P8C plug (with shell). Cable : UL2464 26 AWG x 8C.	3BSC630197R1	
	TC562 Short Distance Modem, G1 Compliant Length < 10 km. Point-to-point up to 1 km at 19200 bps. Power 24V d.c. To be used with CI531, CI532Vxx, CI534Vxx and CI853. Note! This part is exempted from the scope of 2100/65/EU (RoHS) as provided in article 2 (4)(c), (e), (f) and (j) therein (ref.: 3BSE088609 – EU DECLARATION OF CONFORMITY - ABB Advant Master Process Control System)	3BSC630049R1	
	TK853V020 Modem Cable, 2 m Cable for connection between modem TC562 and TP830.	3BSC950201R1	


Communication Interface selection guide

Supported Communication modules	PROFIBUS DP	FOUNDATION FIELDBUS	RS-232 C	MB300	INSUM	Drivebus	S100 I/O	Genius TRIO I/O	Satt I/O	MODBUS TCP	IEC 61850
Module	CI854A/CI854B	CI860	CI853	CI855	CI857	CI858	CI856	CI862	CI865	CI867/CI867A	CI868/CI868A
Protocol	DP-V1 (PA via Linking Device)	FF HSE (H1 via Linking Device)	MODBUS RTU master, COMLI master/slave, Siemens 3964R master, User defined protocols	MasterBus 300	IEEE 802.3	ABB's DriveBus	ABB's S100 I/O	Genius	ABB's Satt I/O	MODBUS TCP	IEC 61850
Master or slave	Master	Master	Master/slave	Master	Master	Master	Master	Master	Master	Master/slave	
Number of channels	2	1	2	2	1	1 main, 2 aux	1	1	1	2 (CI867A 1 channel)	1
Max units on CEX bus	12	12	12	12	6	2	12	12	4	12	12
Transmission speed	9.6 - 12,000 kbit/s	10/100 Mbit/s	75 - 19 200 b/s	10 Mbit/s, 200 Datasets/s	10 Mbit/s	4 Mbit/s	-	38.4 - 153.6 kbit/s	-	10/100 Mbit/s (Ch1), 10 Mbit/s (Ch2)	10/100 Mbit/s
Cable redundancy	Yes	No	No	Yes	No	No	No	No	No	No	No
Module redundancy	Yes	Yes	No	No	No	No	No	No	No	Yes	No
Hot Swap	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Used together with High Integrity Controller	Yes	No	Yes	Yes	Yes	No	No	No	No	Yes	Yes
Connectors	DB female (9-pin)	RJ-45 female (8-pin)	RJ-45 female (8-pin)	RJ-45 female (8-pin)	RJ-45 female (8-pin)	Fiberoptic	Miniribbon (36-pin)	Phoenix (4-pin)	BNC	RJ-45 female (8-pin)	RJ-45 female (8-pin)
24 V current consumption	typ 190 mA	typ 100 mA	typ 100 mA	typ 150 mA	typ 150 mA	typ 200 mA	typ 200 mA	typ 190 mA	typ 120 mA	typ 160 mA	typ 160 mA
Protection class	IP20 according to EN60529, IEC 529										
Certification											
• CE-marked	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
• UL 508	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes
• UL 60079-15 (Class 1 Zone 2)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes
Dimensions	Width 58 x Height 186 x Depth 135 mm (2.3 x 7.3 x 5.3 in.)										
Weight (including base)	700 g (1.5 lbs)	455 g (0.9 lbs)	520 g (1.2 lbs)	700 g (1.5 lbs)	600 g (1.3 lbs)	700 g (1.5 lbs)	600 g (1.3 lbs)	600 g (1.3 lbs)	600 g (1.3 lbs)	700 g (1.5 lbs)	700 g (1.5 lbs)

Supported Communication modules	AF100	PROFINET IO	EtherNet/IP DeviceNet
Module	CI869	CI871/CI871A	CI873/CI873A
Protocol	Advant Fieldbus 100	PROFINET IO	EtherNet/IP DeviceNet (via LD800DN)
Master or slave	Slave	Master	Master
Number of channels	2	1	1
Max units on CEX bus	4	12	4
Transmission speed	Up to 500 Kbit/s	10/100 Mbit/s	10/100 Mbit/s
Cable redundancy	Yes	No	No
Module redundancy	Yes	No	No
Hot Swap	Yes	Yes	Yes
Used together with High Integrity Controller	Yes	Yes	Yes
Connectors	Phoenix (4-pin)	RJ-45 female (8-pin)	RJ-45 female (8-pin)
24 V current consumption	typ 160 mA	typ 160 mA	typ 160 mA
Protection class	IP20 according to EN60529, IEC 529		
UL 508	Yes	Yes	Yes
UL 60079-15 (Class 1 Zone 2)	Yes	Yes	Yes
Dimensions	Width 58 x Height 186 x Depth 135 mm (2.3 x 7.3 x 5.3 in.)		
Weight (including base)	700 g (1.5 lbs)	700 g (1.5 lbs)	700 g (1.5 lbs)


Communication

Serial Communication Interface

Serial Communication Interface		Article no.	
	RS232-C interfaces for protocols COMLI, MODBUS, Siemens 3964R, the free-programmable serial protocol etc.		
	CI853K01 Dual RS232-C interface Package including: <ul style="list-style-type: none"> • CI853, Communication Interface • TP853, Baseplate, width = 60 mm 	3BSE018103R1	


Communication

MODBUS TCP

MODBUS TCP		Article no.	
	CI867K01 Modbus TCP Interface Packaging including: <ul style="list-style-type: none"> • CI867, Communication Interface (2 Ch) • TP867, Baseplate, width = 60 mm 	3BSE043660R1	
	CI867AK01 Modbus TCP interface Package including: <ul style="list-style-type: none"> • CI867A, Communication Interface (1 Ch) • TP867, Baseplate, width = 60 mm Only compatible with 800xA 6.0.3.3 and 6.1.1, CompactControl Builder 6.0.0-3 and 6.1.1, and onwards.	3BSE092689R1	


Communication

PROFIBUS DP

PROFIBUS DP		Article no.	
	The required PROFIBUS network components (Linking Devices, etc) must be ordered from price list, PROFIBUS Network Components.		
	CI854BK01 PROFIBUS-DP/V1 Communication Interface Package including: <ul style="list-style-type: none"> • CI854B, Communication Interface • TP854, Baseplate, width = 60 mm Only compatible with 800xA 6.0.3.2, Compact Control Builder 6.0.0-2 and onwards. Please see Product Update for more information.	3BSE069449R1	


Communication

PROFINET IO

PROFINET IO		Article no.	
	CI871AK01 PROFINET IO Communication Interface Package including: <ul style="list-style-type: none"> • CI871A, Communication Interface • TP867, Baseplate, width = 60 mm Only compatible with 800xA 6.0.3.3 and 6.1.1, Compact Control Builder 6.0.0-3 and 6.1.1, and onwards.	3BSE092693R1	


Communication

FOUNDATION Fieldbus

FOUNDATION Fieldbus	Article no.	
 <p>The required FOUNDATION Fieldbus network components (Linking devices, etc) must be ordered from price list, FOUNDATION Fieldbus Network Components.</p> <p>CI860K01 FOUNDATION Fieldbus HSE Interface Package including:</p> <ul style="list-style-type: none"> • CI860, Communication Interface • TP860, Baseplate, width = 60 mm 	3BSE032444R1	



Communication

IEC 61850

IEC 61850	Article no.	
 <p>For order of IEC 61850 related products, local organizations must comply with the Demands on the Purchaser to secure successful sales of IEC 61850 with System 800xA. Ref doc, 3BSE058798.</p> <p>CI868AK01 IEC 61850 Communication Interface Package including:</p> <ul style="list-style-type: none"> • CI868A, Communication Interface • TP867, Baseplate, width=60mm <p>Only compatible with 800xA 6.0.3.3 and 6.1.1, Compact Control Builder 6.0.0-3 and 6.1.1, and onwards.</p>	3BSE092691R1	


Communication

Ethernet/IP

Ethernet/IP	Article no.	
 <p>CI873AK01 Ethernet/IP Communication Interface Packaging including:</p> <ul style="list-style-type: none"> • CI873A, Communication Interface • TP867, Baseplate width=60mm <p>Only compatible with 800xA 6.0.3.3 and 6.1.1, Compact Control Builder 6.0.0-3 and 6.1.1, and onwards.</p>	3BSE092695R1	
 <p>LD 800DN EtherNet/IP to DeviceNet Linking Device, G1 Compliant Package including:</p> <ul style="list-style-type: none"> 1 pcs LD 800DN 1 pcs Installation Guide 2 pcs Termination resistors for DeviceNet, 1/4 W, 121 Ohm <p>Only to be used with CI873 Communication Interface.</p>	3BSC690164R1	


Communication

Advant Fieldbus 100

Advant Fieldbus 100		Article no.	
	CI869K01 AF 100 Communication Interface Package including: <ul style="list-style-type: none"> • CI869, Communication Interface • TP869, Baseplate, width=60mm Note! This part is exempted from the scope of 2011/65/EU (RoHS) as provided in Article 2(4)(c), (e), (f) and (j) therein (ref.: 3BSE087241 - Technical Overview - ABB Advant Master Process Control System).	3BSE049110R1	


Communication

MasterBus 300

MasterBus 300		Article no.	
	CI855K01 MasterBus 300 Interface Communication between AC 800M and S100 system. Package including: <ul style="list-style-type: none"> • CI855, MB300 Interface Module • TP853, Base plate 	3BSE018106R1	


Communication

S100 I/O Bus

S100 I/O Bus		Article no.	
	CI856K01 S100 I/O Interface Installed on DIN rail. Communication between AC 800M and S100 system. Package including: <ul style="list-style-type: none"> • CI856, Communication Interface • TP856, Baseplate, width = 60mm 	3BSE026055R1	


Communication

Satt I/O

Satt I/O		Article no.	
	For SATT 19" rack I/O and S200 I/O via ControlNet. For additional Satt 19" rack I/O components, please refer to Business Online (BOL).		
	CI865K01 SATT I/O Communication Interface Package including: <ul style="list-style-type: none"> - CI865, Communication Interface - TP865, Baseplate, width = 60 mm 	3BSE040795R1	


Communication

INSUM

INSUM		Article no.	
	CI857K01 INSUM Ethernet Interface Package including: <ul style="list-style-type: none"> - CI857, Communication Interface - TP853, Baseplate, width = 60 mm 	3BSE018144R1	











Communication

DriveBus

DriveBus		Article no.	
	CI858K01 DriveBus Interface Package including: <ul style="list-style-type: none"> - CI858, Communication Interface - TP858, Baseplate, width = 60 mm 	3BSE018135R1	

Communication

Bus Accessories

Bus Accessories		Article no.	
         	TK850V007 CEX-Bus Extension Cable Use of TK850V007 needs TK851 as CEX-bus terminator. Length 0,7 m	3BSC950192R1	
	TB850 CEX-Bus Terminator A TB850 CEX-Bus terminator must always be installed on the last unit on the CEX bus. With 25-pin DB25P male connector. With screw fixing.	3BSC950193R1	
	TB851 CEX-Bus Terminator When Communication Interface units are mounted on adjacent DIN rails, they are connected by means of a CEX-Bus extension cable (TK850) and terminated using a TB851 CEX-Bus terminator. With 25-pin DB25S female connector. With screw fixing.	3BSC950194R1	
	BC810K02 CEX-bus Interconnection Unit Including: <ul style="list-style-type: none"> • 2 pcs BC810, Interconnection Unit • 2 pcs TP857, Baseplate, width = 60 mm • TK851, Interconnection Cable • 2 pcs TB850, CEX-Bus Terminator 	3BSE031155R1	
	BC820K02 RCU-Link and CEX-Bus Interconnection Units Allows AC 800M redundant PM858, PM862 or PM866 (A) pair to be up to 200 m apart, cables not included. Including: <ul style="list-style-type: none"> • 2 pcs BC820, RCU-Link and CEX-Bus Interconnection Unit • 2 pcs TP850, Baseplate, width=60mm • 2 pcs TK857 RCU-Link Cable for BC820 • 2 pcs TB850, CEX-Bus Terminator 	3BSE071500R1	
	TK851V010 Connection Cable Length = 1.0 m. Used as: <ul style="list-style-type: none"> • RCU Link Cable • BC810 Interconnection Cable 	3BSC950262R1	
	TB852 RCU Link Terminator Terminator for RCU link.	3BSC950263R1	
	TB853 RCU Control Link Terminator Terminator for RCU Control link.	3BSE057022R1	
	TK855 RCU Data Link Cable Length = 1.0 m. Used as RCU Data Link Cable with PM891.	3BSC950356R1	
	TK856 RCU Control Link Cable Length = 1.0 m. Used as RCU Control Link Cable with PM891	3BSE057021R1	
	TK857V003 RCU Link Cable Length = 0.3 m. Used with BC820.	3BSC950375R1	

AC 800M Power supply and Voters selection guide

Feature	SD831	SD832	SD833	SD834	SS832	SS823	SD853	SD854	SS855
Rated output current	3 A	5 A	10 A	20 A	10 A	20 A	10 A	20 A	40 A
Rated output power	72 W	120 W	240 W	480 W	-	-	240 W	480 W	-
Rated output voltage	d.c. 24 V	d.c. 24 V	d.c. 24 V	d.c. 24 V	-	-	24 V d.c.	24 V d.c.	-
Rated input power	134/143 VA	240/283 VA	447/514 VA	547/568 VA	2 x 10 A	500 W			2 x 20 A
Mains/input voltage, nominal	100-240 V a.c. 110-300 V d.c.	100-120 V a.c. 200-240 V a.c. Auto-select input	100-120 V a.c. 200-240 V a.c. Auto-select input	100-240 V a.c. 110-150 V d.c	2x24 V d.c	1x24 V d.c	100-240 V a.c. 110-150 V d.c.	100-240 V a.c. 110-150 V d.c.	-
Mains voltage variation allowed	100-240 V a.c. +-10 %. 110-300 V d.c. -20 % / +25 %	100-120 V a.c. +-10 %, 200-240 V a.c. +-10 %	100-120 V a.c. +-10 %, 200-240 V a.c. +-10 %	85-276 V a.c. 88-187 V d.c.	-	-	85-264 V a.c 88-180 V d.c.	85-264 V a.c. / 88-180 V d.c.	-
Primary peak inrush current at power on	<28/<54 A	<10 A	<10 A	<13 A	-	-	6 A / 9 A peak	10 A / 4.5 A peak	-
Applications	SELV and PELV	SELV and PELV	SELV and PELV	SELV and PELV	-	-	SELV and PELV	SELV and PELV	-
Load sharing	-	-	-	Parallell connection	-	Yes	Parallell connection	Parallell connection	Two in parallell for voting 40 A
Supervision relay	No	No	No	Yes	Yes	Yes	Yes	Yes	No
Power Factor (at rated output power)	0.61/0.56	0.56/0.47	0.59/0.51	0.95/0.90	-	-	0.99/0.97	0.99/0.95	-
Heat dissipation	10/8 W	14/13 W	24/22 W	40/31 W	18 W	24 W at 20 A and 6 W at 5 A	16.4 W / 12.1 W, 120/230 V a.c.	29.6/22.1 W, 120/230 V a.c.	2 x 10 A: 1.7 W 2 x 20 A: 5.9 W
Efficiency factor (%)	88/89.8	89.4/90.2	91/91.6	92.4/93.9	-	-	93.6/95.2	94.2/95.6	
Output voltage regulation at max. current	< 50 mV / < 100 mV	< 70 mV / < 100 mV s	< 70 mV / < 100 mV	< 10 mV / < 100 mV	0.85 V lower than input	1.2 V lower than input	< 50 mV	< 100 mV	
Ripple (peak to peak)	< 50 mV	< 50 mV	< 50 mV	< 100 mV	-	-	< 50 mV	50 mV	
Secondary voltage holdup time at mains blackout	29/120 ms	80/78 ms	46/47 ms	32/51 ms	-	-	37 ms	32 ms	
Maximum output current (min)	3.3 A	6 A At ambient temp < 45 °C	12 A At ambient temp < 45 °C	30 A < 4 s	25 A (Overload)	35 A (Overload)	12 A At ambient temp < 45 °C	24 A At ambient temp < 45 °C	65 A (up to 5 seconds)
Maximum ambient temperature	55 °C	55 °C	55 °C	55 °C	55 °C	55 °C	70 °C	70 °C	70 °C
Primary: Recommended external fuse ⁽¹⁾	10-20 A	10-20 A	10-20 A	10-20 A	-	-	10-20 A	10-20 A	-
Secondary: Short circuit	4-8 A	10-14 A	14-18 A	Hiccup (2s on 17s off)	Max 25 A RMS	-	Hiccup (2s on 17s off)	Hiccup (2s on 17s off)	Max 26 A RMS
Secondary: Over-Voltage protection	< 39 V	< 39 V	< 39 V	< 37 V	-	< 30 V	Max 32 V	Max 32 V	-
Class of protection	I PE (Protective Earth) connection required				-	-	I PE (Protective Earth) connection required		
Protection rating	IP20 according to IEC60529								

⁽¹⁾ Microcircuit Breaker (MCB), Characteristic B

* For detailed information on each module, please visit: 800xahardwareselector.com

[illegible]


AC 800M Processor Units

AC 800M Power supply and Voters

AC 800M Power supply		Article no.	
	SD831 Power Supply, 3 A, G2 Compliant Input a.c. 100-240 V or d.c. 110-300 V. Output d.c. 24 V 3 A. If redundant power application is required connect to SS8XX. Voting unit. Width = 35mm. DIN rail mounted.	3BSC610064R1	
	SD832 Power Supply, 5 A, G2 Compliant Input a.c. 100-120/200-240 V. Output d.c. 24 V 5 A, auto-select input. If redundant power application is required connect to SS8XX. Voting unit. Width = 35mm. DIN rail mounted.	3BSC610065R1	
	SD833 Power Supply, 10 A, G2 Compliant Input a.c. 100-120/200-240 V, auto-select input. Output d.c. 24 V 10 A. If redundant power application is required connect to SS8XX. Voting unit. Width = 60 mm. DIN rail mounted.	3BSC610066R1	
	SD834 Power Supply, 20 A, G2 Compliant Input a.c. 100-240 V or d.c. 110-150 V. Output d.c. 24 V 20 A. If redundant power application is required connect to SS8XX. Voting unit. Width = 85 mm. DIN rail mounted.	3BSC610067R1	
	SD853 Power Supply 10 A, G3 Compliant 10 A Power Supply Module. Input AC 100-240 V. Input DC 110-150 V. Output DC 24-28 V. Mounting on horizontal DIN rail. Width 39 mm	3BSE088188R1	
	SD854 Power Supply 20 A, G3 Compliant 20 A Power Supply Module. Input AC 100-240 V. Input DC 110-150 V. Output DC 24-28 V. Mounting on horizontal DIN rail. Width 48 mm	3BSE088189R1	
	SS832 Power Voting Unit, G2 Compliant Input d.c. 24 V. Dual 24 V to single 24 V, 2x10 A. Width = 35 mm. DIN rail mounted.	3BSC610068R1	
	SS855 Power Voting Unit 40 A, G3 Compliant Input 2*8.4...36.4 V, 2x20 A DIN rail mounted.	2PAA125624R1	
	Mains Breaker Kit for DIN Rail 115/230 V 115/230 V a.c. with input terminals, breaker and 3 fused (6.3 A), double output terminals. Width = 102,5 mm.	3BSE022262R1	

AC 800M Processor Units

AC 800M Mounting Rails

AC 800M Mounting Rails		Article no.	
	AI-profile with DIN Rail, Cable Duct 28,3" Mounting 719 mm (28,3") DIN rail length 683 mm (26,9") For RE820.	3BSE022257R1	
	AI-profile with DIN Rail, Cable Duct 24" Mounting 592 mm (24") DIN rail length 556 mm (21,9")	3BSE022256R1	
	AI-profile with DIN Rail, Cable Duct 19" Mounting 465 mm (19") DIN rail length 429 mm (16,9")	3BSE022255R1	

S800 I/O Modules

S800 I/O is a comprehensive and modular process I/O system that communicates with parent controllers either direct connected using the Modulebus or over industry-standard field buses. Thanks to its broad connectivity it fits a wide range of process controllers from ABB and others.


By permitting installation in the field, close to sensors and actuators, S800 I/O reduces the installation cost by reducing the cost of cabling. And thanks to features such as hot swap of modules, on-line reconfiguration and redundancy options, it contributes to keeping production – and thereby profits up.

S800 I/O features include:

- Comprehensive coverage
- Flexible configuration and installation
- Ease of set up
- Reliability and accuracy

- HART pass-through
- Redundancy also on I/O module level
- High Integrity I/O modules certified to SIL3
- High accuracy time tagging
- Defined outputs at communication errors
- I/O modules with Intrinsic Safety interfaces

With its cost-effective design and just 59 mm depth installation, S800L I/O modules are the perfect choice for PLC applications. Robust mechanics, one-piece handling, easy mounting and smart connections save your time in all phases of installation. The comprehensive S800 I/O system consists of more than 40 different module types to respond to every need. Classification of corrosive protection, electrical safety, hazardous location and marine certification brings the possibility to install S800 I/O in a wide variety of applications. S800 I/O is installed with more than 30 million channels worldwide.

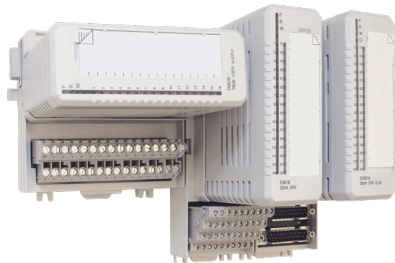

S800 I/O



S800L I/O



S800L I/O

S800 I/O Modules

Digital input modules	
DI810	16 channels, 2 groups of 8 channels, 24 V d.c., current sink.
DI811	16 channels, 2 groups of 8 channels, 48 V d.c., current sink.
DI814	16 channels, 2 groups of 8 channels, 24 V d.c., current source.
DI818	32 channels, 2 groups of 16 channels, 24 V d.c., current sink.
DI820	8 channels, separate returns, 110 V d.c., 120 V a.c.
DI821	8 channels, separate returns, 220 V d.c., 230 V a.c.
DI825	With time tagging, 8 channels, separate returns, 125 V d.c.
DI828	16 channels, separate returns, 110 V d.c., 120 V a.c. / d.c.
DI830	With time tagging. 16 channels, 2 groups of 8 channels, 24 V d.c., current sink. Resolution: < 0.5 ms.
DI831	With time tagging. 16 channels, 2 groups of 8 channels, 48 V d.c., current sink. Resolution: < 0.5 ms.
DI885	With time tagging & wire-fault detection. 8 channels, common return, 24-48 V d.c., current sink. Resolution: 1 ms.
Pulse input module	
DP820	2 channels, separate returns, 0.25 Hz - 1.5 MHz, signal voltage: 5 / 12 V d.c.
DP840	8 channels, extended diagnostics, wire-fault detection, current limited sensor supply, 0.5-20 kHz, 12/24 V d.c or NAMUR, common return.
Digital output modules	
DO810	16 channels, 2 groups of 8 channels, 24 V d.c., max 0.5 A d.c., transistor, current source, short-circuit-proof.
DO814	16 channels, 2 groups of 8 channels, 24 V d.c., max 0.5 A, transistor, current sink, short-circuit-proof.
DO815	8 channels, 2 groups of 4 channels, 24 V d.c., max 2 A, transistor, current source, short-circuit-proof, wire-fault detection.
DO818	32 channels, 2 groups of 16 channels, 24 V, max 0.5 A d.c., transistor, current source, short-circuit-proof
DO820	8 channels, separate returns, 5-250 V, max 3 A a.c./d.c., relay (N.O.).
DO821	8 channels, separate returns, 5-250 V, max 3 A a.c./d.c., relay (N.C.).
DO828	16 channels, separate returns, 5-250V a.c. / 5-125V d.c. max 2A a.c./d.c., relay (N.O.).
Analog input modules	
AI810	8 channels, single-ended, 0(4)-20 mA, 0(2)-10 V, 12 bits.
AI815	8 channels with HART. 0(4)..20 mA, 0(1)..5 V, 12 bit, single ended, current limited transmitter supply.
AI820	Differential inputs, 4 channels, 0(1)-5 V, $\pm 0(2)$ -10 V, $\pm 0(4)$ -20 mA, 14 bits + sign.
AI825	Individually galvanically isolated channels, 4 channels, $\pm 0(2)$ -10 V, $\pm 0(4)$ - 20 mA, 14 bits + sign.
AI830A	RTD inputs, 8 channels, Pt100, Ni100, Ni120, Cu10, resistor 0-400 ohms, 14 bits, 3-wire.
AI835A	TC inputs, 8 channels, (7+ ref. junction), separate returns. TC types B, C, D, E, J, K, L, N, R, S, T, U, - 30...75 mV, 15 bits.
Analog output modules	
AO810V2	8 channels, common return, 0(4)-20 mA, 14 bits, load: 850 ohms (short-circuit-proof).
AO815	8 channels with HART. 4..20 mA, 12 bit, load: 750 ohms, common return, short-circuit-proof.
AO820	4 channels, individually galvanically isolated, separate returns, measuring range: $\pm 0(2)$ -10 V, $\pm 0(4)$ -20 mA, resolution: 12 bits + sign, load: 500 ohms (current) / 5 kohms (voltage), short-circuit-proof.
Intrinsic-safety modules	
DI890	8 channels, separate returns, proximity sensors (NAMUR) or voltage-free contact., current sink, wire-fault detection.
DO890	4 channels, separate returns, load 150-5000 ohms, 11 V @ 40 mA, current source, wire-fault detection, short circuit-proof.
AI890	8 channels, single-ended, 0(4)-20 mA, 12 bits, transmitter power supply.
AI893	8 channels, TC: 7 + ref. junction, sep. returns. TC types B, C, E, J, K, L, N, R, S, T, U, -10...80 mV. RTD: Pt50-1000, Ni100-500, Cu10-100, resistor 0-4000 W, 3-wire. 15 bits + sign.
AI895	8 channels, single-ended, 4-20 mA, 12 bits, transmitter power supply, HART pass-through.
AO890	8 channels, common return, 0(4)-20 mA, 12 bits, load: 725 ohms short-circuit-proof.
AO895	8 channels, common return, 4-20 mA, 12 bits, load: 725 ohms short-circuit-proof, HART pass-through.
Redundant modules	
DI840	16 channels, common return, 24 V d.c., current sink, extended diagnostics, time-tagging, current limited sensor supply.
DP840	8 channels, common return, 0.5-20 kHz, 12/24 V d.c or NAMUR, extended diagnostics, wire-fault detection.
DO840	16 channels, common return, 24 V d.c., max. 0.5 A, transistor, current source, short-circuit-proof, extended diagnostics.
AI843	TC input, 8 channels + ref. junction. TC types: B, C, E, J, K, L, N, R, S, T, U, -30...75 mV, 16 bits, extended diagnostics.
AI845	8 channels, 12 bits, 0(4)-20 mA 0(1)-5 V, extended diagnostics, HART pass-through, current limited transmitter supply, single ended.
AO845A	8 channels, 12 bits, common return, 4-20 mA, extended diagnostics, HART pass-through, 750 ohms.


S800L I/O Modules

S800L modules	
DI801	16 channels, 1 group, 24 V d.c., current sink.
DI802	8 channels, 110 V d.c., 150 V a.c.
DI803	8 channels, 220 V d.c., 230 V a.c.
DO801	16 channels, common return, 24 V, max 0.5 A d.c., transistor, current source, short-circuit-proof.
DO802	8 channels, 5-250 V, max 2 A a.c./d.c., relay (N.O.).
AI801	8 channels, single-ended, 0(4)-20 mA, 12 bits.
AO801	8 channels, common return, 0(4)-20 mA, 12 bits, load: less than 750 ohms.
Accessories	
TU805K01	For DI801 & DO801. With field power distribution screw terminals. For two or three wire connection.

Environmental Data for S800 I/O	
Climatic Operating Conditions	+5 to +55 °C (Storage -40 to +70 °C, RH = 5 to 95 % no condensation, IEC/EN 61131-2
Protection class	IP20 according to EN 60529, IEC 529
Corrosive protection	G3 compliant according to ISA-71.04
Electromagnetic Compatibility and CE-mark	Meets EMC directive 2004/108/EC according to EN 61000-6-2 and EN 61000-6-4
Electromagnetic Emission	Tested according to EN 61000-6-4 EMC – Generic Emission Standard, Part 2 – Industrial Environment
Electromagnetic Immunity	Tested according to EN 61000-6-2 EMC – Generic Immunity Standard, Part 2 – Industrial Environment
Electrical Safety *	UL508, IEC/EN 61131-2
Hazardous Classified Locations *	C1 Div 2 cULus, C1 Zone 2 cULus, ATEX Zone 2
Safety Integrity (IEC 61508)	PM865/SM811, PM867/SM812, AI880A, DI880, DO880: IEC 61508 up to SIL3

^{a)} For detailed information on each module, please visit: www.800xahardwareselector.com

Measurements

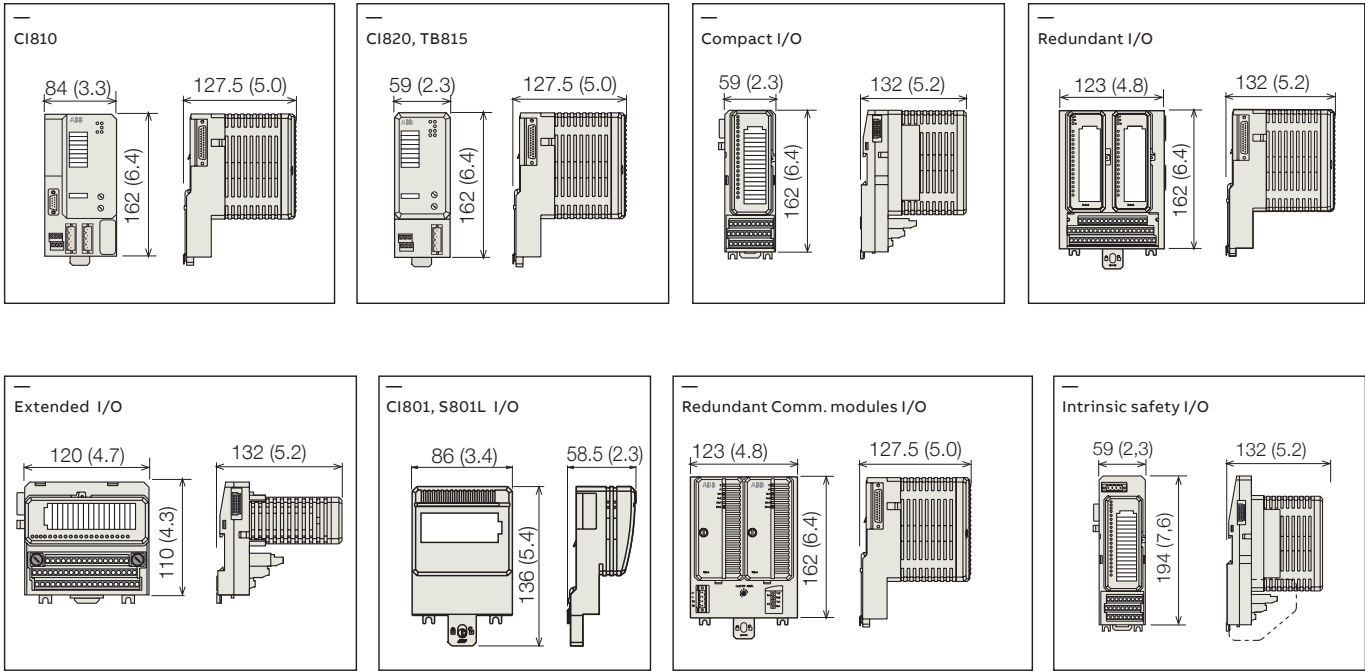

Dimensions in mm (in.)

S800 I/O modules selection guide

	NAMUR inputs	Binary 24 V	Binary 48 V	Binary 110 V	Binary 230 V	Binary Relay	Analog Unipolar	Analog Bipolar	Temperature RTD	Temperature T/C	SOE	HART	Intrinsic safety	Redundant	High integrity
I/O Features S800															
Digital input modules															
DI810		•													
DI811			•												
DI814		•													
DI818		•													
DI820				•											
DI821					•										
DI825				•							•				
DI828				•											
DI830		•									•				
DI831			•								•				
DI840		•									•			•	
DI880		•									•			•	•
DI885		•	•								•				
DI890	•										•		•		
Digital output modules															
DO810		•													
DO814		•													
DO815		•													
DO818		•													
DO820						•									
DO821						•									
DO828						•									
DO840		•												•	
DO880		•												•	•
DO890													•		
Pulse input modules															
DP820		•													
DP840	•	•												•	
Analog input modules															
AI810							•								
AI815							•					•			
AI820								•							
AI825								•							
AI830A									•						
AI835A										•					
AI843										•				•	
AI845							•					•		•	
AI880A							•					•		•	•
AI890							•						•		
AI893									•	•			•		
AI895							•					•	•		
Analog output modules															
AO810V2							•								
AO815							•					•			
AO820								•							
AO845A							•					•		•	
AO890							•						•		
AO895							•					•	•		
S800L modules															
DI801		•													
DI802				•											
DI803					•										
DO801		•													
DO802						•									
AI801							•								
AO801							•								

S800 I/O

Extended warranty for S800 I/O Hardware

Extended warranty for S800 I/O Hardware

We can offer an extended warranty for one, two, or three years in addition to normal warranty conditions for S800 I/O Hardware. See price list Extended Warranty Time.

S800 I/O



ISA-S71.04 level G3 Compliance

ISA-S71.04 level G3 Compliance

Modules are compliant to ISA-S71.04 level G3, unless explicitly stated differently.


Communication

Field Communication Interface

Field Communication Interface		Article no.	
   	CI801 PROFIBUS FCI S800 Interface Including: 1 pcs Power Supply Connector 1 pcs TB807 Modulebus Terminator The basic system software loaded in CI801 does not support the following I/O modules: DI825, DI830, DI831, DI885, AI880A, DI880 and DO880.	3BSE022366R1	
	CI840A PROFIBUS DP-V1 Interface. For redundant communication interface two CI840A and one TU847 or one TU846 must be ordered.	3BSE041882R1	
	TU846 MTU for CI840 For 1+1 CI840 supporting redundant I/O. Vertical mounting of modules. Including: 1 pcs Power Supply Connector 2 pcs TB807 Modulebus Terminator	3BSE022460R1	
	TU847 MTU for CI840. For 1+1 CI840 Supporting non-redundant I/O. Vertical mounting of modules. Including: 1 pcs Power Supply Connector 1 pcs TB807 Modulebus Terminator	3BSE022462R1	


Communication

Field Communication Interface

Field Communication Interface		Article no.	
	Extra, Front label set FCI/AC 70/TB Sheet with 12 labels. For CI810, CI820, CI830, and TB820.	3BSC970089R1	
	Extra, Label set, item design. FCI/AC70/TB Sheet with 40 labels. For CI810, CI820, CI830, and TB820.	3BSC970091R1	
	Mounting kit, vertical CI801/CI840/TB840 For vertical mounting of CI801, CI840, and TB840 on a vertical DIN rail.	3BSE040749R1	
	Mounting profile kit DIN rails and 1 cable duct DIN rail length: 1650 mm + 210 mm (65") + (8.3").	3BSE049768R1	
	Al-profile with DIN Rail and cable duct 19" Mounting 465 mm (19") DIN rail length 429 mm (16,9").	3BSE022255R1	
	Al-profile with DIN Rail and cable duct 24" Mounting 592 mm (24") DIN rail length 556 mm (21,9").	3BSE022256R1	


Communication

Upgrade Kit and Tool Cables

Upgrade Kit and Tool Cables		Article no.	
	TK527V030 Interface cable, 3 m L = 3 m. DE9 pin to DE9 socket. For connection of CI810, CI820 and CI830 to PC. Used to connect a PC to CI801, CI810, CI820 and CI830 for download of software. Download to CI801 requires TK212A in addition. DE9 pin to DE9 socket. Note! This part is exempted from the scope of 2011/65/EU (RoHS) as provided in Article 2(4)(c), (e), (f) and (j) therein (ref.: 3BSE088609 – EU DECLARATION OF CONFORMITY - ABB Advant Master Process Control System)	3BSC950004R1	
	TK212A Tool cable RJ45 8P8C plug Used to connect a PC to CI801, CI840 or CI840A for download of software. Download to CI801 requires a TK527V030 in addition. RJ45 (male) to Dsub-9 (female), length 3 m. RJ45 8P8C plug (with shell). Cable: UL2464 26 AWG x 8C.	3BSC630197R1	
	FS801K01 Service adapter kit Including: 1 pcs Service adapter FS801 1 pcs cable TK802 For connection of CI801 to PC, a cable TK212A is also needed.	3BSE038407R1	


S800 I/O

S800 I/O Modules

Analog Input Modules		Article no.	
	AI810 Analog input 1x8 ch. 0(4)..20mA, 0..10V, 12Bit, single ended. Use Module Termination Unit TU810, TU812, TU814, TU818, TU830, TU833, TU835, TU838 and TU850.	3BSE008516R1	
	AI815 Analog Input HART 1x8 ch. 0(4)..20mA, 0(1)..5V, 12bit, single ended. Current limited transmitter power distribution. Use Module Termination Unit TU810, TU812, TU814, TU818, TU830, TU833, TU835 and TU838.	3BSE052604R1	
	AI820 Analog input 4x1 ch. +-20mA, 0(4)..20mA, +-10V, +-5V, 0(1)..5V, diff., 50V CMV, Rin(curr) 250 Ohms, 14bit + sign. Individually galvanic isolated channels. Use Module Termination Unit TU810, TU812, TU814, TU830 and TU833.	3BSE008544R1	
	AI825 Analog Input 4x1 ch Galv. isol. -20..20mA, -10..10V, 14bit + sign. Individually galvanically isolated channels. Use Module Termination Unit TU811, TU813 and TU831.	3BSE036456R1	
	AI830A Analog input 1x8 ch RTD Pt100, Ni100/120, Cu10, R. Use Module Termination Unit TU810, TU812, TU814, TU830 and TU833.	3BSE040662R1	
	AI835A Thermocouple/mV Input 8 ch. Use Module Termination Unit TU810, TU812, TU814, TU818, TU830 and TU833.	3BSE051306R1	
	AI843 Termocouple/mV Input S/R 8 ch. Single or redundant. 16bit. Use Modules Termination Unit TU818, TU830, TU833, TU842, TU843 and TU852.	3BSE028925R1	
	AI845 Analog Input S/R HART 8 ch. 0(4)..20mA, 0(1)..5V, 12bit, single ended. Current limited transmitter power distribution. Advanced on-board diagnostics. HART support. Use Module Termination Unit TU810, TU812, TU814, TU818, TU830, TU833, TU835, TU838, TU844, TU845 and TU854.	3BSE023675R1	
	AI890 Analog Input Intrinsic Safety 8 ch. 0 (4)...20mA single ended. Intrinsic Safety Interface. Use Module Termination Unit TU890 or TU891.	3BSC690071R1	
	AI893 Analog Input TC/RTD IS 8 ch. For TC and RTD sensors. Intrinsic Safety Interface. Use Module Termination Unit TU890 and TU 891.	3BSC690141R1	
	AI895 Analog Input IS HART 8 ch. 4...20mA single ended. Intrinsic Safety Interface and HART. Use Module Termination Unit TU890 or TU891.	3BSC690086R1	


S800 I/O

S800 I/O Modules

Analog Output Modules		Article no.	
	AO810V2 Analog Output 1x8 ch. 0(4)...20mA, 14bit RLmax 500/850 Ohms. Use Module Termination Unit TU810, TU812, TU814, TU830 or TU833.	3BSE038415R1	
	AO815 Analog Output HART 1x8 ch. 1x8 ch. 4...20mA, 12bit, RLmax 750 ohm. Use Module Termination Unit TU810, TU812, TU814, TU830 or TU833.	3BSE052605R1	
	AO820 Analog Output 4x1 ch. +-20mA, 0(4)...20mA, +-10V, 12bit + sign. Indiv. isol. ch. RL max 500 Ohms. Use Module Termination Unit TU810, TU812, TU814, TU830 or TU833.	3BSE008546R1	
	AO845A Analog Output S/R HART 8 ch. (0) 4...20mA, 12bit, RLmax 750 ohm, Single or redundant. Loop supervised DI function. Use Module Termination Unit TU810, TU812, TU814, TU830, TU833, TU842, TU843, TU852.	3BSE045584R1	
	AO890 Analog Output Intrinsic Safety 8 ch. 0 (4)...20mA. RL max 750 ohm. Intrinsic Safety Interface. Use Module Termination Unit TU890 or TU891.	3BSC690072R1	
	AO895 Analog Output Intrinsic Safety HART 8 ch. (0) 4...20mA. RL max 750 ohm. Intrinsic Safety Interface and HART. Use Module Termination Unit TU890 or TU891.	3BSC690087R1	


S800 I/O

S800 I/O Modules

Digital Input Modules		Article no.	
	DI810 Digital Input 24V d.c. 16 ch. Isolated in two groups of 8 channels. Use Module Termination Unit TU810, TU812, TU814, TU818, TU830, TU833, TU838 and TU850.	3BSE008508R1	
	DI811 Digital input 48 V 16 ch. Isolated in two groups of 8 channels. Use Module Termination Unit TU810, TU812, TU814, TU818, TU830, TU833, TU838 and TU850.	3BSE008552R1	
	DI814 Digital Input 24V Current 16 ch. Isolated in two groups of 8 channels. Current sourcing. Use Module Termination Unit TU810, TU812, TU814, TU830, TU833, TU838.	3BUR001454R1	
	DI818 Digital Input 24V 32 ch. Isolated in two groups of 16 channels. Use Module Termination Unit TU818, TU819 and TU830.	3BSE069052R1	
	DI820 Digital Input 120V a.c. 8 ch. Individually galvanic isolated channels. Use Module Termination Unit TU811, TU813, TU831, TU839 and TU851.	3BSE008512R1	
	DI821 Digital Input 230V 8 ch. Individually galvanic isolated channels. Use Module Termination Unit TU811, TU813, TU831, TU839 and TU851.	3BSE008550R1	
	DI825 Digital Input 125V SOE 8 ch. Individually galvanic Isolated channels. Use Module Termination Unit TU811, TU813 and TU831.	3BSE036373R1	
	DI828 Digital Input, 120V 16 ch. Individually galvanic isolated channels. Use Module Termination Unit TU851.	3BSE069054R1	
	DI830 Digital Input 24V SOE 16 ch. Isolated in two groups of 8 channels. Use Module Termination Unit TU810, TU812, TU814, TU818, TU830, TU833, TU838 and TU850.	3BSE013210R1	
	DI831 Digital Input 48V SOE 16 ch. Isolated in two groups of 8 channels. Use Module Termination Unit TU810, TU812, TU814, TU818, TU830, TU833, TU838 and TU850.	3BSE013212R1	
	DI840 Digital Input 24V S/R 16 ch. Single or redundant. Advanced On-Board diagnostics. Use Module Termination Unit TU810, TU812, TU814, TU818, TU830, TU833, TU838, TU842, TU843 and TU852.	3BSE020836R1	
	DI890 Digital Input Intrinsic Safety 8 ch. Intrinsic Safety Interface. Individually galvanic isolated channels. Use Module Termination Unit TU890 or TU891.	3BSC690073R1	


S800 I/O

S800 I/O Modules

Digital Output Modules		Article no.	
	DO810 Digital Output 24 V 16 ch. Isolated in two groups of 8 channels. 0.5A, short circuit proof. Use Module Termination Unit TU810, TU812, TU814, TU830, TU833.	3BSE008510R1	
	DO814 Digital Output Current 16 ch. Isolated in two groups of 8 channels. 0.5A, shortcut circuit proof. Current sinking. Use Module Termination Unit TU810, TU812, TU814, TU830, TU833, TU838.	3BUR001455R1	
	DO815 Digital Output 24V 8 ch. Isolated in two groups of 8 channels. 2.0A, short circuit proof. Use Module Termination Unit TU810, TU812, TU814, TU830, TU833.	3BSE013258R1	
	DO818 Digital Output 24V 32 ch. Isolated in two groups of 16 channels. 0.5A, short circuit proof. Use Module Termination Unit TU818, TU819, TU830.	3BSE069053R1	
	DO820 Digital Output Relay 8 ch. 24-230V a.c./d.c. 3A, cos phi>0.4, d.c. 42W. Individually galvanic isolated channels. Use Module Termination Unit TU811, TU813, TU831, TU836, TU837, TU851.	3BSE008514R1	
	DO821 Digital Output Relay 8 ch. 24-230V a.c./d.c.. 3A, cos phi>0.4, d.c. 42W. Normal closed. Individually galvanic isolated channels. Use Module Termination Unit TU811, TU813, TU831, TU836, TU837, TU851.	3BSE013250R1	
	DO828 Digital Output, Relay 16 ch. Individually galvanic isolated channels. 5-250V a.c and 5-125V d.c, max 2A. Use Module Termination Unit TU851.	3BSE069055R1	
	DO840 Digital Output 24V S/R 16 ch. Isolated in two groups of 8 channels. Single or redundant. 0.5 A. Advanced On-board diagnostics. Use Module Termination Unit TU810, TU812, TU814, TU830, TU833, TU842, TU843 and TU852.	3BSE020838R1	
	DO890 Digital Output Intrinsic Safety 4 ch. Intrinsic Safety Interface. Individually galvanic isolated channels. Use Module Termination Unit TU890 or TU891.	3BSC690074R1	


S800 I/O

Pulse Counting Modules

Pulse Counting Modules		Article no.	
	DP820 Pulse Counter RS-422 2 ch bidirectional pulse counters and frequency measurement current, 5V, (12V), 24V. 1,5 MHz Rated isol 50V. Use Module Termination Unit TU810, TU812, TU814, TU830, TU833.	3BSE013228R1	
	DP840 Pulse Counter S/R 8 ch. Pulse Counter or Frequency Measurement Module. Redundant or single. 0.5Hz - 20kHz. Use Module Termination Unit TU810, TU812, TU814, TU818, TU830, TU833, TU842, TU843, TU844, TU845, TU852 and TU854.	3BSE028926R1	



S800 I/O

Label sets for I/O Modules

Label sets for I/O Modules		Article no.	
	Transparent film fronts Set of 12 transparent plastic film fronts. To be used with ordinary paper quality.	3BSE072159R1	
	White colored plastic coated paper One sheet of size A4. Original paper quality. No need to use transparent films.	3BSE072160R1	
	Yellow colored plastic coated paper One sheet of size A4. Original paper quality. No need to use transparent films. To be used with DI880, DO880, AI880A.	3BSE072161R1	


S800 I/O

High Integrity I/O Modules

High Integrity I/O Modules		Article no.	
 	The modules can only be connected to a AC 800M controller, PM867. Direct connection to the modulebus and via the optical modulebus via TB840 (not TB820).		
	AI880A Analog Input HI. S/R. HART 8 ch. (0) 4..20mA, 12 bit. HART communication. Single or redundant. High Integrity, certified for SIL3. Requires configuration according to Safety Manual. Loop supervised DI function. Use Module Termination Unit TU834, TU844, TU845 and TU854.	3BSE039293R1	
	DI880 Digital Input HI. S/R 16 ch. 24V d.c. inputs. High Integrity, certified for SIL3. Single or redundant. Requires configuration according to Safety Manual. Use Module Termination Unit TU810, TU812, TU814, TU818, TU830, TU833, TU838, TU842, TU843, TU852.	3BSE028586R1	
	DO880 Digital Output HI. S/R 16 ch. 24V d.c., 0,5A Outputs. High Integrity, certified for SIL3. Single or redundant. Requires configuration according to Safety Manual. Use Module Termination Unit TU810, TU812, TU814, TU830, TU833, TU842, TU843, TU852.	3BSE028602R1	
	SS823 Power Voting Unit, G3 Compliant Required in a High Integrity 800xA system. One per power supply unit, also at redundant configurations. Input d.c 24 V. Dual 24 V to single 24 V, 20A. DIN rail mounted.	3BSE038226R1	






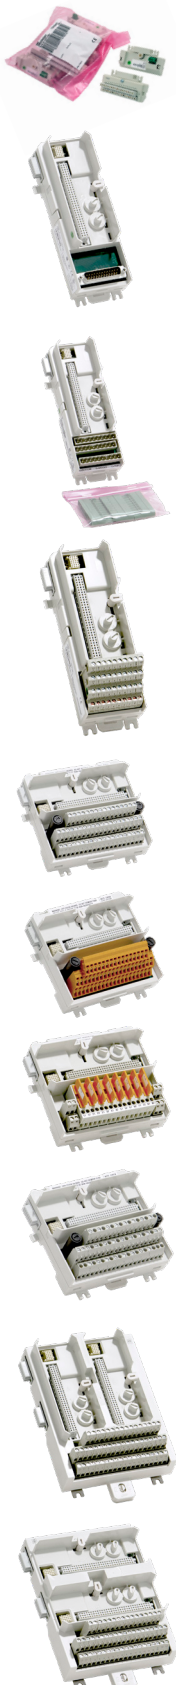






S800 I/O

Module Termination Units

Module Termination Units		Article no.	
	TU805K01 Termination Units 2- or 3-wire Includes 10 pcs of Termination Unit TU805 for DI801 and DO801.	3BSE035990R1	
	TU810V1 Compact MTU, 50V. Compact Module Termination Unit 2x8 signal terminals.	3BSE013230R1	
	TU811V1 Compact MTU, 250V. Compact Module Termination Unit 1x8 signal terminals.	3BSE013231R1	
	TU812V1 Compact MTU, 50V, D-sub. Compact Module Termination Unit with 25 pin D-sub connector, rated isol. 50V. D-sub (female). Connector is not enclosed.	3BSE013232R1	
	TU813 Compact MTU, 250V Crimped snap-in connectors.	3BSE036714R1	
	TU814V1 Compact MTU, 50V, snap-in con. Compact Module Termination Unit 2x8 Signal terminals for crimped snap-in connectors. Detachable (pluggable) connectors are enclosed.	3BSE013233R1	
	TU818 Compact MTU, 50V Compact Module Termination Unit with 1x32 (and 2x16) signal terminals.	3BSE069209R1	
	TU819 Compact MTU, 50V Compact Module Termination Unit with 2x25 pin D-sub connector, D-sub (female) connector is not enclosed.	3BSE068891R1	
	TU830V1 Extended MTU, 50V Extended Module Termination Unit 2x16 signal terminals.	3BSE013234R1	
	TU831V1 Extended MTU, 250V Extended Module Termination Unit 2x8 signal terminals.	3BSE013235R1	
	TU833 Extended MTU, 50V 2x16 signal terminals. Spring-cage terminals.	3BSE038726R1	
	TU834 Extended MTU, 50V Used with AI880A. Shunt Stick not included.	3BSE040364R1	
	TU835V1 Extended MTU, 50V, fused Extended Module Termination Unit 8 fused power outlets, 8 signal terminals.	3BSE013236R1	
	TU836V1 Extended MTU, 250V, fused Extended Module Termination Unit 2x4 fused signals, 2x4 return terminals, 2x2 L 2x2N terminals.	3BSE013237R1	
	TU837V1 Extended MTU, 250V, fused Extended Module Termination Unit 8x1 fused isol. signals, 8x1 L terminals, 2x6 N terminals.	3BSE013238R1	
	TU838 Extended MTU, 50V. Extended Module termination unit 2x4 fused transducer power outlets, 16 signal terminals, 2x4 return terminals, 2x2 L+, 2x2 L- terminals. Module is mounted horizontally.	3BSE008572R1	
	TU839 Extended MTU, 250V Extended Module Termination Unit, 2x8 signal terminals. 2x4 fused sensor power.	3BSE046966R1	
	TU842 Redundant MTU, 50V Used with redundant I/O. Horizontal DIN railmounting.	3BSE020850R1	
	TU843 Redundant MTU, 50V. Used with redundant I/O. Vertical DIN rail mounting.	3BSE021443R1	


S800 I/O and S800L I/O

Module Termination Units

Module Termination Units		Article no.	
           	TU844 Redundant MTU, 50V Used with redundant I/O. Horizontal DIN rail mounting. Shunt Sticks not included.	3BSE021445R1	
	TU845 Redundant MTU, 50V Used with redundant I/O. Vertical DIN rail mounting. Shunt Sticks not included.	3BSE021447R1	
	TU850 Extended MTU, 50V 2x8 signal terminals and 2x8 disconnectable current limited sensor/transmitter outlet power terminals.	3BSE050930R1	
	TU851 Extended MTU, 250V Extended Module Termination Unit with 2x16 signal terminals.	3BSE068782R1	
	TU852 MTU, redundant, 50V Used with redundant I/O. Horizontal DIN rail mounting. With 2x25 pin D-sub connector.	3BSE069964R1	
	TU854 MTU, redundant, 50V Used with redundant I/O. Horizontal DIN rail mounting. With 1x25 pin D-sub connector. Shunt Sticks not included.	3BSE069966R1	
	TU890 Intrinsic Safety MTU Module termination Unit with Intrinsic Safety Interface, 3x9 signal terminals. Including wiring separator.	3BSC690075R1	
	TU891 non Intrinsic Safety MTU Module Termination Unit for 3x9 signal terminals. For non Intrinsic Safety.	3BSC840157R1	
	TY801K01 8 pcs Shunt Stick 125 + 125 ohms shunt. Used for AI845 and AI880A on TU834, TU844, TU845 and TU854.	3BSE023607R1	
	TY804K01 8 pcs Shunt Stick 1000 ohms shunt. Used for DP840 on TU844, TU845, TU854	3BSE033670R1	
	TY805K01 8 pcs Shunt Stick 125 + 125 ohms shunt with current limitation on transmitter power. Used for AI845 and AI880A on TU834, TU844, TU845, TU854.	3BSE081160R1	
	TY820K01 10 pcs Temperature Sensor TY820 is a temperature sensor with a PT 100 element. Used with AI835/AI835A and AI843 to measure cold junction temperature.	3BSE056980R1	


S800L I/O

S800L I/O Modules

Analog Input Modules		Article no.	
	AI801 Analog input 1x8 ch, 0(4)...20mA, 12bit, single ended.	3BSE020512R1	
Analog Output Modules		Article no.	
	AO801 Analog output 1x8 ch, 0(4)...20mA, 12 bit, RLmax 850 Ohm.	3BSE020514R1	
Digital Input Modules		Article no.	
	DI801 Digital Input 24V 16 ch. Current sink.	3BSE020508R1	
	DI802 Digital Input 120V 8 ch. Individually galvanic isolated channels.	3BSE022360R1	
	DI803 Digital Input 230V 8 ch. Individually galvanic isolated channels.	3BSE022362R1	
Digital Output Modules		Article no.	
	DO801 Digital Output 24V 16 ch. 0,5A.	3BSE020510R1	
	DO802 Digital Output Relay 8 ch. 24-230V, a.c./d.c. Individually galvanic isolated channels.	3BSE022364R1	


S800L I/O

Label sets for S800L I/O Modules

Label sets for S800L I/O Modules		Article no.	
	Label Set S800L, 16 ch Text colour: Black, Text style: Helv. reg., Text height: 2 mm. Material: Polyesterfilm Xeroperm t=0,12 Sheet with 12 labels for 16 channels I/O modules.	3BSE019419R1	
	Label Set S800L, 8 ch Text colour: Black, Text style: Helv. reg., Text height: 2 mm. Material: Polyesterfilm Xeroperm t = 0,12 Sheet with 12 labels for 8 channels I/O modules.	3BSE019419R2	





S800 I/O and S800L I/O

ModuleBus Communication Parts

ModuleBus Communication Parts		Article no.	
	TB805 Bus Outlet Modulebus extension cable adaptor D-sub 25, female. One required per extension cable TK801.	3BSE008534R1	
	TB845, Dual Modulebus outlet Modulebus extension cable adaptor two D-sub, female. Two TK801 cables for redundancy.	3BSE021437R1	
	TB806 Bus Inlet Modulebus extension cable adaptor D-sub 25, male. One required per extension cable TK801.	3BSE008536R1	
	TB846 Dual Modulebus inlet Modulebus extension cable adaptor two D-sub, male. Two TK801 cables for redundancy.	3BSE021439R1	
	TK801V003 Cable, 0.3m Modulebus Extension Shielded Cable 0.3m D-sub 25, male-female.	3BSC950089R1	
	TK801V006 Cable, 0.6m Modulebus Extension Shielded Cable 0.6m D-sub 25, male-female.	3BSC950089R2	
	TK801V012 Cable, 1.2 m Modulebus Extension Shielded Cable 1.2m D-sub 25, male-female.	3BSC950089R3	
	TB807 Modulebus terminator Terminator for Modulebus.	3BSE008538R1	
	TB820V2 Modulebus Cluster Modem Optical cluster modem for non redundant operation. Including: 1 pcs Power Supply Connector 1 pcs TB807 Modulebus Terminator	3BSE013208R1	
	TB825 Optical Media Converter Multi Mode Short to long distance optical fiber conversion. For modulebus communication up to 1000 m.	3BSE036634R1	
	TB826 Optical Media Converter Single Mode Short to long distance optical fiber conversion. For modulebus communication up to 5000 m, for S800 I/O HI up to 20 000 m.	3BSE061637R1	
	TB840A Modulebus Cluster Modem Optical cluster modem for 1+1 redundant operation.	3BSE037760R1	
	TB842 Modulebus Optical Port Used together with CI801 and CI840, connected via TB806 or TB846.	3BSE022464R1	
	TU807 Termination Unit for TB840/TB840A For single modulebus I/O. Including: 1 pcs TB807	3BSE039025R1	
	TU840 Termination Unit for 1+1 TB840. Support for redundant I/O Including: 1 pcs Power Supply Connector 2 pcs TB807 Modulebus Terminator	3BSE020846R1	
	TU841 Termination unit for 1+1 TB840. Support for non-redundant I/O. Including: 1 pcs Power Supply Connector 1 pcs TB807 Modulebus Terminator	3BSE020848R1	

S800 I/O and S800L I/O

ModuleBus Communication Parts

ModuleBus Communication Parts		Article no.	
   	TU848 Termination Unit for 1+1 TB840 MTU with individual power supply. Support for redundant I/O. Including: 1 pcs Power Supply Connector, 2 pcs TB807 Modulebus Terminator	3BSE042558R1	
	TU849 Termination Unit for 1+1 TB840. MTU with individual power supply. Support for non-redundant I/O. Including: 1 pcs Power Supply Connector, 1 pcs TB807 Modulebus Terminator	3BSE042560R1	
	TK811V015 POF Cable, 1.5m, Duplex 1.5 m latching duplex connector. Duplex plastic fibre.	3BSC950107R1	
	TK811V050 POF Cable, 5m, Duplex 5 m latching duplex connector. Duplex plastic fibre.	3BSC950107R2	
	TK811V150 POF Cable, 15m, Duplex 15 m latching duplex connector. Duplex plastic fibre.	3BSC950107R3	
	TK812V015 POF Cable, 1.5m, Simplex 1.5 m latching connector. Simplex plastic fibre.	3BSC950118R1	
	TK812V050 POF Cable, 5m, Simplex 5.0 m latching connector. Simplex plastic fibre.	3BSC950118R2	
	TK812V150 POF Cable, 15m, Simplex 15 m latching connector. Simplex plastic fibre.	3BSC950118R3	

S800 I/O Power supply and selection guide

Feature	SD831	SD832	SD833	SD834	SS832	SS823	SD853	SD854	SS855
Rated output current	3 A	5 A	10 A	20 A	10 A	20 A	10 A	20 A	40 A
Rated output power	72 W	120 W	240 W	480 W	-	-	240 W	480 W	-
Rated output voltage	d.c. 24 V	d.c. 24 V	d.c. 24 V	d.c. 24 V	-	-	24 V d.c.	24 V d.c.	-
Rated input power	134/143 VA	240/283 VA	447/514 VA	547/568 VA	240 W (2 x 10 A)	500 W			2 x 20 A
Mains/input voltage, nominal	100-240 V a.c. 110-300 V d.c.	100-120 V a.c. 200-240 V a.c. Auto-select input	100-120 V a.c. 200-240 V a.c. Auto-select input	100-240 V a.c. 110-150 V d.c.	2x24 V d.c.	1x24 V d.c.	100-240 V a.c. 110-150 V d.c.	100-240 V a.c. 110-150 V d.c.	-
Mains voltage variation allowed	100-240 V a.c. +10 %, 110-300 V d.c. -20 % / +25 %	100-120 V a.c. +10 %, 200-240 V a.c. +10 %	100-120 V a.c. +10 %, 200-240 V a.c. +10 %	85-276 V a.c. 88-187 V d.c.	-	-	85-264 V a.c. 88-180 V d.c.	85-264 V a.c. / 88-180 V d.c.	-
Primary peak inrush current at power on	<28/<54 A	<10 A	<10 A	<13 A	-	-	6 A / 9 A peak	10 A / 4.5 A peak	-
Applications	SELV and PELV	SELV and PELV	SELV and PELV	SELV and PELV	-	-	SELV and PELV	SELV and PELV	-
Load sharing	-	-	-	Parallell connection	-	Yes	Parallell connection	Parallell connection	Two in parallell for voting 40 A

S800I/O Power supply and selection guide

Feature	SD831	SD832	SD833	SD834	SS832	SS823	SD853	SD854	SS855
Supervision relay	No	No	No	Yes	Yes	Yes	Yes	Yes	Yes
Power Factor (at rated output power)	0.61/0.56	0.56/0.47	0.59/0.51	0.95/0.90	-	-	0.99/0.97	0.99/0.95	-
Heat dissipation	10/8 W	14/13 W	24/22 W	40/31 W	18 W	24 W at 20 A and 6 W at 5 A	16.4 W / 12.1 W, 120/230 V a.c.	29.6/22.1 W, 120/230 V a.c.	2 x 10 A: 1.7 W 2 x 20 A: 5.9 W
Efficiency factor (%)	88/89.8	89.4/90.2	91/91.6	92.4/93.9	-	-	93.6/95.2	94.2/95.6	-
Output voltage regulation at max. current	< 50 mV / < 100 mV	< 70 mV / < 100 mV s	< 70 mV / < 100 mV	< 10 mV / < 100 mV	0.85 V lower than input	1.2 V lower than input	< 50 mV	< 100 mV	
Ripple (peak to peak)	< 50 mV	< 50 mV	< 50 mV	< 100 mV	-	-	< 50 mV	50 mV	-
Secondary voltage holdup time at mains blackout	29/120 ms	80/78 ms	46/47 ms	32/51 ms	-	-	37 ms	32 ms	-
Maximum output current (min)	3.3 A	6 A At ambient temp < 45 °C	12 A At ambient temp < 45 °C	30 A < 4 s	25 A (Overload)	35 A (Overload)	12 A At ambient temp < 45 °C	24 A At ambient temp < 45 °C	65 A (up to 5 seconds)
Maximum ambient temperature	55 °C	55 °C	55 °C	55 °C	55 °C	55 °C	70 °C	70 °C	70 °C
Primary: Recommended external fuse ⁽¹⁾	10-20 A	10-20 A	10-20 A	10-20 A	-	-	10-20 A	10-20 A	-
Secondary: Short circuit	4-8 A	10-14 A	14-18 A	Hiccup (2s on 17s off)	Max 25 A RMS	-	Hiccup (2s on 18s off)	Hiccup (2s on 18s off)	Max 26 A RMS
Secondary: Over-Voltage protection	< 39 V	< 39 V	< 39 V	< 37 V	-	< 30 V	Max 32 V	Max 32 V	-
Class of protection	I PE (Protective Earth) connection required				-	-	I PE (Protective Earth) connection required		
Protection rating	IP20 according to IEC60529								
Mounting spacing Width mm	15 mm (0.59")	15 mm (0.59")	15 mm (0.59")	15 mm (0.59")	15 mm (0.59")	15 mm (0.6")	39 mm (1.53 in.)	48 mm (1.88 in.)	5 mm
Mounting spacing Height mm	40 mm (1.57")	40 mm (1.57")	40 mm (1.57")	40 mm (1.57")	25 mm (1")	25 mm (1.2")	117 mm (4.60 in.)	127 mm (5.00 in.)	top 40 mm, bottom 20 mm
Weight (lbs.)	430 g (0.9 lbs.)	500 g (1.1 lbs.)	700 g (1.5 lbs.)	1200 g (2.6 lbs.)	350 g (0.77 lbs.)	870 g (1.9 lbs.)	600 g (1.32 lbs)	830 g (1.83 lbs)	280 g
Corrosive atmosphere ISA-S71.04	G2	G2	G2	G2	G2	G3	G3	G3	G3
CE mark	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
ATEX Zone 2	No	No	No	No	No	Yes	Yes	Yes	Yes
IECEx Zone 2	-	-	-	-	-	-	Yes	Yes	Yes
Hazardous Location, Class 1 Div 2	No	No	No	Yes	No	No	Yes	Yes	Yes
Electrical safety	IEC 61131-2, UL 508, EN 50178						IEC 60950-1		
Pollution degree	Degree 2, IEC 60664-1								
Mechanical operating conditions	EN 61131-2								
EMC	EN 61000-6-4 and EN 61000-6-2								
Overvoltage Categories	Over-voltage Category III (IEC/EN 60664-1)								
RoHS compliance	DIRECTIVE/2011/65/EU (EN 50581:2012)								
WEEE compliance	DIRECTIVE/2012/19/EU								

⁽¹⁾ Microcircuit Breaker (MCB), Characteristic B

* For detailed information on each module, please visit: 800xahardwareselector.com

S800 I/O

Power Supply

AC 800M Power supply		Article no.	
    	SD831 Power Supply, 3 A, G2 Compliant Input a.c. 100-240 V or d.c. 110-300 V. Output d.c. 24 V 3 A. If redundant power application is required connect to SS8XX. Voting unit. Width = 35mm. DIN rail mounted.	3BSC610064R1	
	SD832 Power Supply, 5 A, G2 Compliant Input a.c. 100-120/200-240 V. Output d.c. 24 V 5A, auto-select input. If redundant power application is required connect to SS8XX. Voting unit. Width = 35 mm. DIN rail mounted.	3BSC610065R1	
	SD833 Power Supply, 10 A, G2 Compliant Input a.c. 100-120/200-240 V, auto-select input. Output d.c. 24 V 10A. If redundant power application is required connect to SS8XX. Voting unit. Width = 60 mm. DIN rail mounted.	3BSC610066R1	
	SD834 Power Supply, 20 A, G2 Compliant Input a.c. 100-240 V or d.c. 110-150 V. Output d.c. 24 V 20 A. If redundant power application is required connect to SS8XX. Voting unit. Width = 85 mm. DIN rail mounted.	3BSC610067R1	
	SD853 Power Supply 10 A, G3 Compliant 10 A Power Supply Module. Input AC 100-240 V. Input DC 110-150 V. Output DC 24-28 V. Mounting on horizontal DIN rail. Width 39 mm	3BSE088188R1	
	SD854 Power Supply 20 A, G3 Compliant 20 A Power Supply Module. Input AC 100-240 V. Input DC 110-150 V. Output DC 24-28 V. Mounting on horizontal DIN rail. Width 48 mm	3BSE088189R1	
	SS832 Power Voting Unit, G2 Compliant Input d.c. 24 V. Dual 24 V to single 24 V, 2x10 A. Width = 35 mm. DIN rail mounted.	3BSC610068R1	
	SS855 Power Voting Unit 40 A, G3 Compliant Input 2*8.4...36.4 V, 2x20 A DIN rail mounted.	2PAA125624R1	
	Mains Breaker Kit for DIN Rail 115/230 V 115/230 V a.c. with input terminals, breaker and 3 fused (6.3A), double output terminals. Width = 102,5 mm.	3BSE022262R1	

Process Industries Application Libraries

Process Industries Application Libraries	
	<p>The Process Industries Application Libraries (PIAL) in this document include Process Control Device Library (PCDL), Process Control Equipment Library (PCEL) and ProBase Library. One valid license is required per 800xA system. User documentation is provided electronically with the product media. The licenses support use with System 800xA. These licenses entitle license holders to use the library in one system, meaning one Aspect Server. Please refer to System Guide Ordering and Licensing for more information.</p>
PIAL Media	
	<p>Media for this product can be downloaded from ABB Library and MyABB/MyControlSystem.</p>

Process Industries Application Libraries

Process Control Device Library

Process Control Device Library	
	<p>The 800xA PC Device Library provides device-level objects. The PCDeviceLib is a customized library for the process industry. It builds upon the 800xA - AC 800M library to provide additional functionality and engineering efficiency. Benefits include minimizing the initial learning curve for the Industrial IT Extended Automation System 800xA and to minimize the engineering effort.</p> <p>The PCDevice Library contains an extensive list of objects, but it is licensed only by the number of Control Elements used. Control Elements are the Valves, Motors and PID Loops in a system.</p> <p>The following PCDevice library control modules are categorized as Control Elements – Valve, ValveMan, MotorOnOff, MotorOnOffAdv, Motor2Speed, MotorVarSpeed, ControllerPIDLoop, ControlValvePneumatic, ControlValveElectric, ChokeValve, MotorOnOffCore, Motor2SpeedCore and MotorVarSpeedCore.</p>

Process Industries Application Libraries

Process Control Device Library Licenses		Article no.	
Base Process Control Device Library The PCDevice Library comes with all PCDevice library objects but only the 13 objects listed above are counted as Control Elements. To arrive at the correct number of Control Elements to purchase, count the number of Valve, Motor and ControllerPIDLoop objects associated with the project. Including 125 Control Elements.		3BSE081553R1	
Additional Control Device Library Licenses		Article no.	
Additional 125 Control Elements for PCDL Additional 125 Control Elements for Process Control Device Library (PCDL)		3BSE081554R1	
PCDL Application Engineering		Article no.	
PCDL License for Application Engineering This license is intended to use for Application Engineering purpose only. A maximum of 2500 Control Elements will be issued as a part of the license. For production system, appropriate quantity of Control Elements license must be purchased separate. Media is ordered separately.		3BSE081555R1	
PCDL Additional License for Application Engineering Each additional license comes with 2 500 control elements license.		3BSE081556R1	

Process Industries Application Libraries

Process Control Equipment Library

Process Control Equipment Library

Process Control Equipment Library (PCEquipmentLib) is a comprehensive library of Equipment Module templates, and toolkit components for industrial IT Extended Automation System 800xA.

PCEquipmentLib is designed to optimize the specification and building of ANSI/ISA-88.01-1995 style Equipment Modules and customized Process Units. Designed to "plug and produce" with standard PCDeviceLib control objects, PCEquipmentLib shares common terminology, engineering principles, and naming conventions to make engineering consistent and easy. It is a requirement to use a compatible version of PCDevice Library in conjunction with PCEquipment Library. Refer to PCEquipment Library release notes for appropriate version information.

The PCEquipment Library contains an extensive list of pre-engineered and validated objects like Unit template and Standard Phases, equipment modules, Quality Monitor, pcc supervision, EqTimer, Prompts/PromptsAlarmOwner etc. The PCEquipment Library also contains pre-engineered facility automation Solution objects.

Process Control Equipment Library Licenses

	Article no.	
Base Process Control Equipment Library - Batch This license is for working with up to 125 PCDevice Lib Control Elements. This license shall allow using any number of PCEL Batch Unit type with Standard Phases. All other modules for Equipment module implementation, quality monitoring, PCC configuration, and operator visualization are included with this license. This license also includes Pre-engineered Facility Automation Solutions like AHUs, Scheduler, ZoneMonitor, Facility, Start-Stop sequence, Operator visualization etc. With one base license, a maximum of 125 PCDeviceLib Control Elements can be used. An incremental purchase of PCDevice Lib Control Elements (License Expansion) requires an incremental purchase of PCEquipment Lib license (License Expansion). Note: License for PCDevice Lib Control Elements to be purchased separately.	3BSE081558R1	

Process Industries Application Libraries

Process Control Equipment Library Licenses

Process Control Equipment Library Licenses		Article no.	
Base Process Control Equipment Library - non-Batch This license is for working with up to 125 PCDevice Lib Control Elements without Batch Management. This license shall allow using any number of PCEL Equipment Module (EM) types with Device Summary and ModeControl. Other modules like Prompt, PromptAlarmOwner and EqTimer are included in the license. This license also includes Pre-engineered Facility Automation Solution objects like AHUs, Scheduler, ZoneMonitor, Facility Start-Stop sequence and Operator visualization etc. With one base license, a maximum of 125 PCDL Control Elements can be used. An incremental purchase of PCDevice Lib Control Elements (License Expansion) requires an incremental purchase of PCEquipment Lib license (License Expansion). Note: License for PCDevice Lib Control Elements to be purchased separately.		3BSE081559R1	
Additional Control Equipment Library Licenses		Article no.	
Additional Process Control Equipment Library - Batch Each license is for working with up to 125 PCDevice Lib Control Elements with Batch Management. Additional expansions license. Requires Base PC Equipment Lib. - Batch.		3BSE081560R1	
Additional Process Control Equipment Library - non Batch Each Expansion license is for working with up to 125 PCDevice Lib Control Elements without Batch Management. Additional expansions license. Requires Base PC Equipment Lib. - non-Batch.		3BSE081561R1	

Process Industries Application Libraries

PCEL Application Engineering

PCEL Application Engineering	Article no.	
PCEL License for Application Engineering This Engineering system License is intended to use for Application Engineering purpose only. A maximum of 20 'PCEL With Production Management'. License quantity will be issued as a part of this license, which can be used with both Batch and Non-Batch version of PCEquipmentLib. For production system, appropriate quantity of PCEL with Production Management or without Production Management license quantities, must be purchased separately.	3BSE081562R1	
PCEL Additional License for Application Engineering Each additional license comes with 20 PCEL license, which can be used with both Batch and Non-Batch version of PCEquipmentLib.	3BSE081557R1	

Process Industries Application Libraries

ProBase

ProBase
ProBase is a set of System 800xA libraries with industry specific functionality targeting liquid process handling or other applications where routing, storage of material, CIP, etc. are a major concern in the application. Example industries are food & beverage, chemical, pharmaceuticals, tank farms, etc.

ProBase Licenses	Article no.	
ProBase licensing is based on type and number of controllers executing ProBase.		
ProBase 6.0 PM861/PM861A Software License	3BSE081565R1	
ProBase 6.0 PM864/PM864A Software License	3BSE081566R1	
ProBase 6.0 PM866 Software License	3BSE081568R1	
ProBase 6.0 PM891 Software License	3BSE081569R1	

S900 Remote I/O System

The S900 remote I/O system communicates with System 800xA or other controllers over PROFIBUS. Suitable for applications in the chemical, pharmaceutical, oil and gas industries, S900 I/O can be installed in hazardous areas, thereby reducing marshalling and wiring costs.

Further maintenance savings can be achieved through S900's extended diagnostics and the use of HART®-compliant field devices.

Three series of S900 I/O are available:

- S-series for applications in Zone 1 hazardous areas
- B-series for applications in Zone 2 hazardous areas
- N-series for applications in non hazardous areas

Additional solutions for specific applications are available:

- Field housing - for wall mounting and field mounting in Zone 1 installations with system approval fully certified in accordance with ATEX. The high-grade steel housing is prepared for wall-mounting with facility for insulated screen rails or terminals.

The S900 components are based on a passive backplane suitable for mounting on a DIN rail or directly in a sub-distribution board. The passive backplane includes internal bus communication,

terminals for field circuits, communication, and power supply. The function modules are plugged into the backplane in their appropriate slots. The redundant backplane has two slots for power supply units, two slots for communication interfaces, and 16 slots for function modules.

Digital function modules have up to 8 channels, analog modules up to four. Therefore, when using a redundant backplane, 128 digital or 64 analog channels can be connected per station. In the case of the S and B series, up to ten S900 stations can be connected on a single fieldbus line.

Key S900 benefits include:

- Intrinsically safe - can be installed in Zone 1 and Zone 2 areas.
- Good price/performance ratio because external barriers have been removed and costs are reduced in terms of cabling, installation, hardware, and maintenance.
- Easy configuration using either FDT/DTM or GSD files, allowing easy integration with System 800xA process control systems.
- High availability of the plant thanks to redundancy and hot-swap capability of all components during operation.

Series	Assembly	Field devices / signals	Hazardous area approval
S series	In Zone 1	In Zones 2, 1 and 0 (intrinsically safe signals)	ATEX Zone 1 (Blue TU921S)
B series	In Zone 2	In Zones 2, 1 and 0 (intrinsically safe signals)	ATEX Zone 2 (Blue TU921B)
N series	In safe areas	In safe areas	No * (Black TU921N)

* Field devices mounted in Zone 1/Zone 0 can be connected to N-Series with additional IS barriers; a benefit of IS modules of S- and B-Series.






TU921B for ATEX Zone 2

	NAMUR inputs	Binary 24 V	Binary 48 V	Binary 110 V	Binary 230 V	Binary Relay	Analog Unipolar	Analog Bipolar	Temperature RTD	Temperature T/C	SOE	HART	Intrinsic safety	Redundant	High integrity
I/O Features S900															
Digital I/O modules															
DX910S,B,N*	•												S,B		
Digital output modules															
DO910S,B,N*													S,B		
DO930N			•												
Pulse input modules															
DP910S,B,N*						•							S,B		
Analog input modules															
AI910S,B,N*							•						S,B		
AI930S,B,N*							•					•	S,B		
AI931S,B,N*							•					•	S,B		
AI950S,B,N*									•	•			S,B		
Analog output modules															
AO910S,B,N*							•						S,B		
AO920S,B,N*							•						S,B		
AO930S,B,N*							•					•	S,B		

* For details about S900 I/O please refer to the S900 catalog, document number 3BDD010420.


S900 Remote I/O System


Ex zone 1 system components


Termination Unit		Article no.	
	TU921S Redundant Termination Unit (TU16R-Ex)	3KDE175111L9210	
	for 16 I/O-modules redundant communication and power (Delivery includes CD910)		
Power Supply		Article no.	
	SA920S Power Supply	3BDH000602R1	
	for 24 V DC Do not mix SA910S with SA920S for redundancy (observe Release Notes)		
Communication Interface		Article no.	
	CI920AS Communication Interface V 2.1 (CIPBA-Ex)	3BDH000690R1	
	Use only CI920AS with the same firmware for redundancy for PROFIBUS DP-V1 (observe Release Notes).		

S900 Remote I/O System

Ex zone 1 system components





Digital Input or Output		Article no.	
	DX910S Digital Input or Output (DIO8-Ex) input for dry contact or NAMUR initiator output for low power Intrinsic Safe valves	3KDE175311L9100	
	DO910S Digital Output (DO4-Ex) output for Intrinsic Safe valves	3KDE175321L9100	
	DP910S Frequency Input (FI2-Ex) input for dry contact or NAMUR initiator	3KDE175361L9100	

Analog Input		Article no.	
	AI910S Analog input (AI4-Ex) transmitter power supply, 4...20 mA	3KDE175511L9100	
	AI930S Analog Input, HART (AI4H-Ex) transmitter power supply, 4...20 mA	3KDE175511L9300	
	AI931S Analog Input, HART (AI4H-Ex) passive input, 0/4...20 mA	3KDE175511L9310	
	AI950S Temperature (TI4-Ex) Pt100, Pt1000, Ni100 in 2-/3-/4-technology thermocouples type B, E, J, K, L, N, R, S, T isolated inputs channel by channel.	3KDE175521L9500	

Analog Output		Article no.	
	AO910S Analog output (AO4-Ex) output 0/4...20 mA	3KDE175531L9100	
	AO920S Analog output, isolated (AO4I-Ex) output 0/4...20 mA isolated outputs channel by channel	3KDE175531L9200	
	AO930S Analog output HART (AO4H-Ex) output 0/4...20 mA	3KDE175531L9300	


S900 Remote I/O System


Ex zone 2 system components

Termination Unit		Article no.	
	TU921B Redundant Termination Unit (TU16R-B) for 16 I/O-modules redundant communication and power (Delivery includes CD910)	3KDE175112L9210	
Power Supply		Article no.	
	SA920B Power Supply for 24 V DC the power supply filter type BP901S is not required SA920B is the functional replacement for SA910B do not mix SA910B with SA920B for redundancy (observe Release Notes)	3BDH000601R1	
Communication Interface		Article no.	
	CI920AB Communication Interface V 2.1 (CIPBA-B) Use only CI920AB with the same firmware for redundancy for PROFIBUS DP-V1 (observe Release Notes).	3BDH000691R1	
Digital Input or Output		Article no.	
	DX910B Digital Input or Output (DIO8-B) input for dry contact or NAMUR initiator output for low power I.S. valves	3KDE175312L9100	
	DO910B Digital Output (DO4-B) output for I.S. valves	3KDE175322L9100	
	DP910B Frequency Input (FI2-B) input for dry contact or NAMUR initiator	3KDE175362L9100	

S900 Remote I/O System





Ex zone 2 system components

Analog Input		Article no.	
	AI910B Analog input (AI4-B) transmitter power supply, 4...20 mA	3KDE175512L9100	
	AI930B Analog Input, HART (AI4H-B) transmitter power supply, 4...20 mA	3KDE175512L9300	
	AI931B Analog Input, HART (AI4H-B) passive input, 0/4...20 mA	3KDE175512L9310	
	AI950B Temperature (TI4-B) Pt100, Pt1000, Ni100 in 2-/3-/4-technology thermocouples type B, E, J, K, L, N, R, S, T isolated inputs channel by channel	3KDE175522L9500	

Analog Output		Article no.	
	AO910B Analog output (AO4-B) output 0/4...20 mA	3KDE175532L9100	
	AO920B Analog output, isolated (AO4I-B) output 0/4...20 mA isolated outputs channel by channel	3KDE175532L9200	
	AO930B Analog output HART (AO4H-B) output 0/4...20 mA	3KDE175532L9300	


S900 Remote I/O System


Safe area system components

Termination Unit		Article no.	
	TU921N Redundant Termination Unit (TU16R) for 16 I/O-modules redundant communication and power (Delivery includes CD910)	3KDE175113L9210	
Power Supply		Article no.	
	SA920N Power Supply for 24 V DC Do not mix SA910N with SA920N for redundancy (observe Release Notes)	3BDH000600R1	
Communication Interface		Article no.	
	CI920AN Communication Interface V 2.1 (CIPBA) use only CI920AN with the same firmware for redundancy for PROFIBUS DP-V1 (observe Release Notes)	3BDH000692R1	
Digital Input or Output		Article no.	
	DX910N Digital Input or Output (DIO8) input for dry contact or NAMUR initiator output for low power valves	3KDE175313L9100	
	DO910N Digital Output (DO4) output for valves	3KDE175323L9100	
	DO930N Relay Output (RO6) with 4 normally-open contacts and 2 changeover contacts	3BDS014114	
	DP910N Frequency Input (FI2) input for dry contact or NAMUR initiator	3KDE175363L9100	

S900 Remote I/O System


Safe area system components


Analog Input		Article no.	
	AI910N Analog input (AI4) transmitter power supply, 4...20 mA	3KDE175513L9100	
	AI930N Analog Input, HART (AI4H) transmitter power supply, 4...20 mA	3KDE175513L9300	
	AI931N Analog Input, HART (AI4H) passive input, 0/4...20 mA	3KDE175513L9310	
	AI950N Temperature (TI4) Pt100, Pt1000, Ni100 in 2-/3-/4-technology thermocouples type B, E, J, K, L, N, R, S, T isolated inputs channel by channel	3KDE175523L9500	

Analog Output		Article no.	
	AO910N Analog output (AO4) output 0/4...20 mA	3KDE175533L9100	
	AO920N Analog output, isolated (AO4I) output 0/4...20 mA isolated outputs channel by channel	3KDE175533L9200	
	AO930N Analog output HART (AO4H) output 0/4...20 mA	3KDE175533L9300	

S900 Remote I/O System

Accessories

Fieldbus isolating repeater		Article no.	
	BI914S Fieldbus isolating repeater separates an intrinsically safe RS485 fieldbus from a non intrinsically safe RS485 fieldbus with bus termination mounted in DIN rail mounted housing with IP20 protection one channel version BARTEC - 07-7311-97WP/K1E0	3BDH000649R1	
	BI923S Ring-coupler RS485 / FO - intrinsically safe - Slave separates an intrinsically safe fibre optic ring from a non intrinsically safe RS485 fieldbus BARTEC - 07-7311-97WP5400 mounted in DIN rail mounted housing with IP20 protection (Slave) Optical Plug FSMA	3KDE175831L9230	
	BI924S Ring-coupler RS485 / FO intrinsically safe - Master separates an intrinsically safe fibre optic ring from a non intrinsically safe RS485 fieldbus BARTEC - 07-7311-97WP5400 mounted in DIN rail mounted housing with IP20 protection (Master) Optical Plug FSMA	3KDE175831L9240	
	BI934S Ring-coupler RS485 / FO intrinsically safe – Slave Separates an intrinsically safe fibre optic ring from one intrinsically safe RS485 fieldbus segment Mounted in separate field housing BARTEC - 07-3103-2512/9003 Optical Plug FSMA	3BDH000674R0001	

Accessories		Article no.	
	BP914S Intrinsically safe PROFIBUS-DP connector for CI920AS and CI920AB D-SUB Connector (color blue) for operating the intrinsically safe PROFIBUS-DP with CI920AS and CI920AB.	3BSE067082R1	
	Siemens 6ES7972-0DA60-0XA0 Connector can only be used with CI920AS and CI920AB. Do not use in combination with CI920S or CI920B. This would violate the explosion protection and could cause destruction of CI920S or CI920B. For CI920S and CI920B connector BP910S has to be ordered as a spare part via Business Online.		
	IP920 Module housing IP20 protection for empty slots on the termination unit for use in S900 S, B, and N systems	3KDE175831L9200	
	IL910 Insert labels 380 pcs.	3KDE175839L9101	

IP920 Module housing

Software		Article no.	
CD910, S900 I/O Media CD-ROM CD-ROM incl S900 Documentation, Certificates, GSD (file) CD-ROM will be delivered with all TU921 and CB220 deliveries.		3KDE175839L9100	

S900 Remote I/O System

Field Housing S900-FH660S

General Information

The Ex e field housings FH660S from stainless steel (1.4301) serves for the reception of one redundant termination unit (backplane) TU16R-Ex (Order-No. TU921S) as well as further components with ATEX-certification for the hazardous area in zone 1.

Dimensions 600x600x300 mm / for max 100 field cables

The field housings are pre-mounted with stopping plugs instead of cable glands. The cable glands have to be ordered separately at manufacturer Hummel or manufacturer Bimed.

To fulfill the ATEX-certification the following cable glands are recommended:

Manufacturer Hummel:

- Type HSK-M-EMV-Ex M16 (article no. 1646160050)
- Type HSK-M-EMV-Ex M20 (article no. 1646200051)
- Type HSK-M-EMV-Ex M32 (article no. 1646320050)

Manufacturer Bimed:

- Type EBS M16 (article no. EBS01M)
- Type EBS M20 (article no. EBS1M)
- Type EBS M25 (article no. EBS2M)

All S900 modules and power supply components have to be ordered separately!

Additional costs of air transport and courier transport ask under e-mail:

Orderbox-CtrlPr DEAPR/DEAPR/ABB or orderbox.control-products@de.abb.com

Internal Installation



With system certificate.

FH660S-2000 Field housing

including the following components:

- Termination Unit (backplane) TU921S
- 4 Terminals (UK10N)

Field housings are delivered without cable glands. Cable glands have to be ordered separately (see General information and Product Update 2PAA112874).

FH660S-2020 Field housing

including the following components:

- Termination Unit (backplane) TU921S
- 4 Terminals (UK10N)
- 2 Switches

Field housings are delivered without cable glands. Cable glands have to be ordered separately (see General information and Product Update 2PAA112874).

Article no.

3KDE175804V2000

3KDE175804V2020

S900 Remote I/O System

Field Housing S900-FH680S

General Information

The Ex e field housings FH680S from stainless steel (1.4301) serves for the reception of one redundant termination unit (backplane) TU16R-Ex (Order-No. TU921S) as well as further components with ATEX-certification for the hazardous area in zone 1.

Dimensions 600x800x300 mm / for max 100 field cables

The field housings are pre-mounted with stopping plugs instead of cable glands. The cable glands have to be ordered separately at manufacturer Hummel or manufacturer Bimed.
To fulfill the ATEX-certification the following cable glands are recommended:

Manufacturer Hummel:

- Type HSK-M-EMV-Ex M16 (article no. 1646160050)
- Type HSK-M-EMV-Ex M20 (article no. 1646200051)
- Type HSK-M-EMV-Ex M32 (article no. 1646320050)

Manufacturer Bimed:

- Type EBS M16 (article no. EBS01M)
- Type EBS M20 (article no. EBS1M)
- Type EBS M25 (article no. EBS2M)

All S900 modules and power supply components have to be ordered separately!
Additional costs of air transport and courier transport ask under e-mail:
Orderbox-CtrlPr DEAPR/DEAPR/ABB or orderbox.control-products@de.abb.com

Internal Installation	Article no.	
With system certificate.		
FH680S-2020 Field housing including the following components: <ul style="list-style-type: none"> • Termination Unit (backplane) TU921S • 4 Terminals (UK10N) • 2 Switches <p>Field housings are delivered without cable glands. Cable glands have to be ordered separately (see General information and Product Update 2PAA112874)</p>	3KDE175811V2020	

Fieldbus Network

FOUNDATION Fieldbus Network Components

FOUNDATION Fieldbus HSE/H1 Linking Device

LD 810HSE links the FOUNDATION Fieldbus HSE protocol to the FOUNDATION Fieldbus H1 protocol and vice versa. Up to 4 external powered H1 lines can be connected to one LD 810HSE. Two LD 810HSE can be combined to a redundant set of devices. In this case the Redundancy Link cable is required.

Linking Devices



LD 810 HSE EX Linking Device

LD 810 HSE EX module for DIN rail mounting with 4 H1 links and one HSE connector. The module itself needs external 24 VDC power supply. H1 links must be powered separately. Restrictions: Linking Device LD 810HSE Ex is not suitable for replacing one of the LD 800 Linking Devices in a redundant pair.

To clarify, both devices in the redundant pair must be replaced with LD 810HSE Ex.


Redundancy cable for LD 810HSE Ex can be made / procured by the end customer directly & need not be ordered through ABB.

Article no.

3BSE091722R1

Fieldbus Network

PROFIBUS Network Components

PROFIBUS Redundancy Link Module RLM02		Article no.	
	The RLM02 is delivered with a printed manual.		
	RLM02, PROFIBUS Redundancy Link Module PROFIBUS Redundancy Link Module for Profibus line redundancy. Converts a non-redundant PROFIBUS line to two redundant RS485 lines or vice versa.	3BSE091723R1	

PROFIBUS DP Accessories		Article no.	
	PCO 011, PROFIBUS DP connector with bus termination max. 12 Mbit/s, 35° cable outlet, IP40, switchable bus termination Phoenix Contact article no. 2708232.	3BDZ000371R1	
	PCO 012, PROFIBUS DP connector with bus termination and adapter max. 12 Mbit/s, 35° cable outlet, IP40, switchable bus termination, programming connection SUB-D Phoenix Contact article no. 2708245	3BDZ000372R1	


Extended warranty time

S800 I/O, S900 I/O, Fieldbus and AC800M


Extended warranty time on hardware for S800 I/O, S900 I/O, Fieldbus and AC 800M		Article no.	
Extended Warranty, 12 additional months S800 I/O, S900 I/O, Fieldbus and AC 800M Note that the price for the Extended Warranty Time order will be calculated as 3 percentage of the affected S800 I/O, S900 I/O, Fieldbus and AC 800M articles in the accompanying order.		3BSE049878R1	
Extended Warranty, 24 additional months S800 I/O, S900 I/O, Fieldbus and AC 800M Note that the price for the Extended Warranty Time order will be calculated as 6 percentage of the affected S800 I/O, S900 I/O, Fieldbus and AC 800M articles in the accompanying order.		3BSE049878R2	
Extended Warranty, 36 additional months S800 I/O, S900 I/O, Fieldbus and AC 800M Note that the price for the Extended Warranty Time order will be calculated as 9 percentage of the affected S800 I/O, S900 I/O, Fieldbus and AC 800M articles in the accompanying order.		3BSE049878R3	

ABB Ability™ System 800xA® 6.0.3.4

Media

ABB Ability™ System 800xA - Media	Article no.	
	The articles in section 1 may only be selected when ordering a new 800xA system, or if the end user has a valid Automation Software Maintenance agreement.	
	System 800xA 6.0.3.4, Media Box (SSD) System 800xA Media Box, including: System 800xA 6.0.3.4 and User Documentation on a Solid State Drive device.	7PAA004242R1
	System 800xA 6.0.3.3, Media Box (SSD) System 800xA Media Box, including: System 800xA 6.0.3.3 and User Documentation on a Solid State Drive device.	3BSE094604R1
	System 800xA 6.0.3.2, Media Box (SSD) System 800xA Media Box, including: System 800xA 6.0.3.2 and User Documentation on a Solid State Drive device.	3BSE091370R1
	System 800xA 6.0.3.1, Media Box (SSD) Including: System 800xA 6.0.3.1, and User Documentation on a Solid State Drive device.	3BSE079233R600
	System 800xA 6.0.3.0, Media Box (SSD) Including: System 800xA 6.0.3.0, and User Documentation on a Solid State Drive device.	3BSE091369R1
	System 800xA 6.0.2.0, Media Box (SSD) Including: System 800xA 6.0.2.0, and User Documentation on a Solid State Drive device.	3BSE091368R1
	System 800xA 6.0.1.0, Media Box (SSD) Including: System 800xA 6.0.1.0, and User Documentation on a Solid State Drive device.	3BSE091367R1
	System 800xA 6.0.0.0, Media Box (SSD) Including: System 800xA 6.0.0.0, and User Documentation on a Solid State Drive device.	3BSE091366R1

Dongles

Dongles		Article no.	
	License dongle for USB Port For use in 800xA or Compact HMI systems. To be used with 800xA 5.1 Rev A and later.	3BSE064644R1	

Panel 800 version 6.2

Panel 800 is a user-friendly, intuitive and ergonomic operator panel that combines slim, space saving dimensions with a comprehensive range of advanced functions.

Panel 800 family comprises of user-friendly, intuitive and ergonomic operator panels that combine slim, space-saving dimensions with a comprehensive range of advanced functions.

Adding to the already well established feature rich Panel 800 version 6.2 our new Rugged and Black panels are designed to perform in challenging harsh environments.

Whether it is heavy outdoor use, usage in areas with explosion risk, or ship bridge use in marine applications, they are ready to provide you with the information needed.

Designed to make process automation easy, all panels are equipped with advanced functionality for process and equipment control, maneuvered by touching the LCD display.

Combined with market-leading performance and stunning graphical ability, Panel 800 erodes the line between ordinary Operator Panels and PC-based HMIs.

Panels are configured using ABB's Panel Builder tool that contains a wide range of advanced functions. The functions are tested and developed with customer needs and preferences in focus.



Specifications Panel 800 version 6.2



Standard panels



Panel	PP875	PP881	PP883	PP886	PP895
Display size	7"	10.4"	12.1"	15.4"	21.5"
Display resolution, ratio	800 × 480 (16:9)	1024 × 600 (16:9)	1280 × 800 (16:10)	1280 × 800 (16:10)	1920 × 1080 (16:9)
Processor	ARM9 (1 GHz)				
Main memory	512 MB	1.0 GB	1.0 GB	1.0 GB	2.0 GB
External storage media	1 × SD card slot (or SDHC with latest image loaded).				
Dimension WxHxD (mm)	204 x 243 x 50	292 × 194 × 52	340 × 242 × 37	410 × 286 × 61	556 × 347 × 65
Net weight (kg)	0.8	1.65	2.6	3.85	7.38
Power supply	+24 VDC (18-32 VDC)				
Operating temperature	-10 to +60 °C				0 °C to +50 °C
Certification					
CE	CE, FCC, KCC				
UL	UL610-2-201				
Marine	DNV, KR, GL, LR, ABS, CCS				-
RoHS compliance	DIRECTIVE/2011/65/EU				
WEEE compliance	DIRECTIVE/2012/19/EU				

Specifications Panel 800 version 6.2



Black panels



Panel	PP875M	PP875H	PP886M
Display size	7"	7"	15.4"
Display resolution, ratio	800 x 480 (16:9)	800 x 480 (16:9)	1280 x 800 (16:10)
Processor	ARM9 (1 GHz)		
Main memory	512 MB	2 GB	1 GB
External storage media	1 × SD card slot (or SDHC with latest image loaded)		
Dimension WxHxD (mm)	204 × 143 × 50		410 x 286 x 61
Net weight (kg)	0.8	0.8	3.85
Power supply	24 VDC (18-32 VDC)		
Operating temperature	-10 to +60 °C		
Certification			
CE	CE, FCC, KCC		
UL	UL61010-2-201		
Marine	DNV, KR, GL, LR, ABS, CCS		
RoHS compliance	DIRECTIVE/2011/65/EU		
WEEE compliance	DIRECTIVE/2012/19/EU		

Specifications Panel 800 version 6.2

Rugged panels



Panel	PP886R	PP887H	PP887S
Display size	15.4”		
Display resolution, ratio	1280 x 800 (16:10)		
Processor	ARM9 (800 MHz)	ARM9 (1 GHz)	ARM9 (1 GHz)
Main memory	1 GB		
External storage media	1 × SD card slot (or SDHC with latest image loaded)		
Dimension WxHxD (mm)	410 × 286 × 73		
Net weight (kg)	4.1	4.1	4.8
Power supply	24 VDC (18-32 VDC)		
Operating temperature	-30 to +70 °C		
Certification			
CE	CE, FCC, KCC		
UL	UL-61010-2-201		
Marine	DNV, KR, GL, LR, ABS, CCS		
Hazardous	UI/cUL C1D2, ATEX (Zone 2, Zone 22), IECEx (Zone 2, Zone 22)		
RoHS compliance	DIRECTIVE/2011/65/EU		
WEEE compliance	DIRECTIVE/2012/19/EU		

Panel 800 version 6.2

Lifecycle Management Program

Control System Lifecycle Management Program

Automation Software Maintenance is the ABB control system lifecycle management program for the Extended Automation, Freelance, Compact Product Suite, Symphony Plus and OCS product lines. ABB recommends its customers to use Automation Software Maintenance for all its installed control systems.

With this program, customers can keep control software up-to-date and maintain a flexible path forward to new system software technology. It provides services to maintain and continually advance and enhance your ABB control system installation. You may choose the level of maintenance and upgrade support that works best for your immediate needs and long-term production targets.


Read more about our Automation Software Maintenance Program and its many valuable services here:
<https://new.abb.com/control-systems/service/offerings/service-agreements>

Please contact your local sales representative for detailed information on the program and how to order Automation Software Maintenance subscriptions.

Upgrade Orders	Article no.
<p>Panel Builder 800 Version 6, upgrade Media folder with Panel Builder 800 Version 6 containing the latest version of:</p> <ul style="list-style-type: none"> • Panel Builder 800 Version 6 • Panel 800 Runtime • Firmware for panels • Manuals as pdf-files • Release Notes • Renewed license <p>This item can be ordered by users with a valid Automation Software Maintenance agreement for Panel Builder 800.</p>	3BSE069301R1

Panel 800 version 6.2






Panel Builder 800


Panel Builder 800	Article no.
<p>Panel Builder 800 is the engineering tool for Panel 800.</p>  <p>Panel Builder 800 Version 6 Media folder with Panel Builder 800 Version 6 containing the latest version of:</p> <ul style="list-style-type: none"> • Panel Builder 800 Version 6 • Panel 800 Runtime • Firmware for panels • Manuals as pdf-files • Release Notes • License for one Panel Builder 800 Version 6 	3BSE069300R1


Panel 800 Version 6.2

Operator Panels

New operator panels introduced for Panel 800 version 6.2. All panels have TFT LCD touch screen. Requires Panel Builder 800 version 6.2 for configuration.


Standard Panels	Article no.
 <p>PP875 Standard panel 7" TFT 800x480 widescreen (16:9). Requires Panel Builder 800 Version 6.2 for configuration.</p> <p>To protect the front, it's recommended to use the RX874 Touch cover. Replaces PP874.</p>	3BSE092977R1
 <p>PP881 Standard panel 10" TFT 1024x600 widescreen (16:9). Requires Panel Builder 800 Version 6.2 for configuration.</p> <p>To protect the front, it's recommended to use the RX881 Touch cover. Replaces PP877. For mounting in the same cut-out as PP877, RX800 Adapter plate is required.</p>	3BSE092978R1
 <p>PP883 Standard panel 12" TFT 1280x800 widescreen (16:10). Requires Panel Builder 800 Version 6.2 for configuration.</p> <p>To protect the front, it's recommended to use the RX883 Touch cover. Replaces PP882.</p>	3BSE092979R1
 <p>PP886 Standard panel 15" TFT 1280x800 widescreen (16:10). Requires Panel Builder 800 Version 6.2 for configuration.</p> <p>To protect the front, it's recommended to use the RX886 Touch cover. Replaces PP885.</p>	3BSE092980R1
 <p>PP895 Standard panel 21" TFT 1920x1080 widescreen (16:9). Requires Panel Builder 800 Version 6.2 for configuration.</p> <p>To protect the front, it's recommended to use the RX895 Touch cover.</p>	3BSE092981R1

Black Panels		Article no.	
	<p>PP875M Black Panel 7" TFT 800x480 widescreen (16:9). Requires Panel Builder 800 Version 6.2 for configuration.</p> <p>To protect the front, it's recommended to use the RX874 Touch cover. Replaces PP874M.</p>	3BSE092982R1	
	<p>PP875H Black Panel, High Brightness 7" TFT 800x480 widescreen (16:9) Brightness 1000 cd/m². Requires Panel Builder 800 Version 6.2 for configuration.</p> <p>To protect the front, it's recommended to use the RX874 Touch cover.</p>	3BSE092983R1	
	<p>PP886M Black Panel 15" High Brightness 1000 cd/m² TFT 1280x800 widescreen (16:10). Requires Panel Builder 800 Version 6.2 for configuration.</p> <p>To protect the front, it's recommended to use the RX886 Touch cover. Replaces PP885M.</p>	3BSE092984R1	

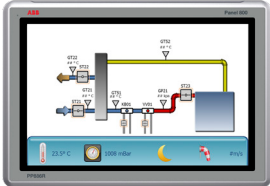Rugged Panels		Article no.	
	<p>PP886R Rugged Panel 15" TFT 1280x800 widescreen (16:10). Requires Panel Builder 800 Version 6.2 for configuration.</p> <p>To protect the front, it's recommended to use the RX886 Touch cover. Replaces PP885R. One Ethernet port.</p>	3BSE092985R1	
	<p>PP887H Rugged Panel, High Brightness 15" TFT 1280x800 widescreen (16:10) Brightness 1000 cd/m². Requires Panel Builder 800 Version 6.2 for configuration.</p> <p>To protect the front, it's recommended to use the RX886 Touch cover. Replaces PP886H.</p>	3BSE092986R1	
	<p>PP887S Rugged Panel, Sealed 15" TFT 1280x800 widescreen (16:10) Brightness 1000 cd/m². Sealed on all sides, can be mounted directly on an arm.</p> <p>Requires Panel Builder 800 Version 6.2 for configuration. To protect the front, it's recommended to use the RX886 Touch cover.</p> <p>PP887S is a fully sealed version with M12 connectors with IP66 ingress protection rating and ATEX/IECEx Zone 2 and Zone 22 (IP65) certification.</p>	3BSE092987R1	



Panel 800 Version 6.2







Dongles

Dongles		Article no.	
	Requires Panel 800 Runtime Version 6.2 to be installed on the PC. The USB dongle enables the runtime and the amount of signals.		
	Panel 800 Version 6.2 dongle 250 tags. USB dongle for 250 signals (tags).	3BSE093564R1	
	Panel 800 Version 6.2 dongle 2000 tags. USB dongle for 2000 signals (tags).	3BSE093565R1	
	Panel 800 Version 6 dongle 4000 tags. USB dongle for 4000 signals (tags).	3BSE093566R1	


Panel 800 Version 6.2


Accessories

Communication Interface for Panel 800		Article no.	
 	CB802 Profibus DP Interface PROFIBUS DP slave expansion module for Panel 800 Version 6 panels. Not possible to use for PP880R, PP885H, PP885M, PP885R, PP886H, PP887H and PP887S. Not marine certified.	3BSE069285R1	
	CB810 USB to Ethernet adapter for programming USB to Ethernet adapter with software. Cross over Ethernet patch cable included.	3BSE042255R1	

Connection Cables for Panel 800		Article no.	
     	TK858V002 Adapter cable Adapter cable RS232 - RS485 0.2 m 9 pin D-Sub to 25 pin D-Sub. For using version 5 RS422/485 cables on Version 6 panels.	3BSE069474R1	
	TK859V000 Gender changer Gender changer 9 pin D-Sub male/male.	3BSE069475R1	
	TK860V001 Splitter cable Splitter cable Version 6 panel. Y-split for use with one RS232 and one RS422 connection. Not possible to use with PP887S.	3BSE069476R1	
	TK868V002 Splitter 3 way (CAB150) Splitter cable. Used when two serial RS485 connections are needed (1xRS232 + 2xRS485). Not possible to use with PP887S.	3BSE093567R1	
	TK865V030 Cable m. 8p to blank 3m (COM) Cable M12 male 8 pin to blank, 3 m (COM). Only for PP887S with M12 contacts.	3BSE092988R1	
	TK865V100 Cable m. 8p to blank 10m (COM) Cable M12 male 8 pin to blank, 10 m (COM). Only for PP887S with M12 contacts.	3BSE092989R1	

Connection Cables for Panel 800		Article no.	
	TK866V030 Cable m. 4p to blank 3m (LAN) Cable M12 male 4 pin to blank, 3 m (LAN). Only for PP887S with M12 contacts.	3BSE092990R1	
	TK866V100 Cable m. 4p to blank 10m (LAN) Cable M12 male 4 pin to blank, 10 m (LAN). Only for PP887S with M12 contacts.	3BSE092991R1	
	TK867V030 Cable f. 4p to blank 3m (POW) Cable M12 female 4 pin to blank, 3 m (POWER). Only for PP887S with M12 contacts.	3BSE092992R1	
	TK867V100 Cable f. 4p to blank 10m (POW) Cable M12 female 4 pin to blank, 10 m (POWER). Only for PP887S with M12 contacts.	3BSE092993R1	
	TK865V000 Conn. 8p male 5.5-7.5mm (COM) Connector M12 male 8 pin 5.5 - 7.5 mm, Gland (COM) Only for PP887S with M12 contacts.	3BSE092994R1	
	TK866V000 Conn. 4p male 5.5-7.5mm (LAN) Connector M12 male 4 pin 5.5 - 7.5 mm, Gland (LAN) Only for PP887S with M12 contacts.	3BSE092995R1	
	TK867V000 Conn. 4p fem. 5.5-7.5mm (POW) Connector M12 female 4 pin 5.5 - 7.5 mm, Gland (POWER) Only for PP887S with M12 contacts.	3BSE092996R1	

Front Protections		Article no.	
	RX874 Touch cover 7" Plastic cover for protection. Possible to use for PP880R, PP874, PP874M, PP875, PP875M and PP875H.	3BSE069287R1	
	RX881 Touch cover 10" Plastic cover for protection. Possible to use for PP881.	3BSE093559R1	
	RX883 Touch cover 12" Plastic cover for protection. Possible to use for PP883.	3BSE093560R1	
	RX886 Touch cover 15" Plastic cover for protection. Possible to use for PP886, PP886M, PP886R, PP887H and PP887S.	3BSE093561R1	
	RX895 Touch cover 21" Plastic cover for protection. Possible to use for PP895.	3BSE093562R1	

Adapter Plates		Article no.	
	RX800 Adapter plate for PP877 to PP881 Adapter plate for installing the replacement panel PP881 on a PP877 mounting.	3BSE093563R1	

Miscellaneous		Article no.	
	MB802V2 SD card 2GB Secure Digital memory card 2 GB Industrial grade for Version 6 panels.	3BSE069477R1	

System 800xA Networks

Control. Monitor. Communicate.

System 800xA Networks provide pre-configured network components that are tested with System 800xA to ensure top quality performance and provide protection against cyber threats.

Wired switches (NE800) - includes a set of rack- and DIN-mounted switches and a wide range of modular transceivers.

Redundant Network Routing Protocol (RNRP) routers are available as part of the System 800xA Networks portfolio developed for use with System 800xA.

System 800xA Networks enables you to take control of your network infrastructure, and benefit from the full potential of a robust, highly performing, and secure 800xA system.



NE870



NE801



PT801




NE840

System 800xA Networks selection guide

Specific feature	NE801	NE802	NE810	NE820	NE840
Article number	3BSE080209R1	3BSE080237R1	3BSE080207R1	3BSE080208R1	3BSE080211R1
Managed	Lightly managed (configurable using physical dip-switches)	Lightly managed (configurable using physical dip-switches)	Managed	Managed	Managed
Dimension (W x H x D)	34 x 123 x 121 mm	34 x 123 x 121 mm	52 x 100 x 101 mm	175 x 105 x 122 mm	466 x 258 x 43 mm
Weight	0.2 kg	0.2 kg	0.7 kg	2.2 kg	3.8 kg
Degree of protection	IP21	IP21	IP40	IP40	IP40
Operating voltage	9.6 to 57.6 VDC redundant power input	9.6 to 57.6 VDC redundant power input	19 to 60 VDC redundant power input	16 to 60 VDC redundant power input	90 to 264VAC, 47 to 63 Hz
Rated current	350 mA @ 12 VDC	100 mA @ 12 VDC	240 mA @ 24 VDC 120 mA @ 48 VDC	930 (1120 ⁽¹⁾) mA @ 20 VDC 380 (450 ⁽¹⁾) mA @ 48 VDC	350 mA @ 120 VAC 60 Hz 220 mA @ 240 VAC 50 Hz
Ethernet TX	4 x 10/100 Mbit/s	4 x 10/100/1000 Mbit/s	8 x 10/100 Mbit/s	7 x 10/100/1000 Mbit/s, 8 x 10/100 Mbit/s	7 x 10/100/1000 Mbit/s, 8 x 10/100 Mbit/s
Ethernet SFP pluggable connections (FX or TX)	1 x LC-connection, 100 Mbit/s	1 x 10/100/1000 Mbit/s	2 x 10/100/1000 Mbit/s	4 x 10/100/1000 Mbit/s	4 x 10/100/1000 Mbit/s
Digital I/O	-	-	1 x 4-ports detachable screw terminal	1 x 4-ports detachable screw terminal	1 x 4-ports detachable screw terminal
Console	-	-	1 x 1 x 2.5 mm jack	1 x USB Micro-B connector	1 x USB Micro-B connector
Operating Temperature	-25 to +70 °C	-40 to +74 °C	-40 to +70 °C	-40 to +70 °C	-40 to +55 °C
Temperature Storage & Transport	-25 to +70 °C	-40 to +85 °C	-50 to +85 °C	-50 to +85 °C	-40 to +85 °C
Network redundancy	-	-	Fast reconfiguration of network typology (FRNT) FRNT ring coupling	Fast reconfiguration of network typology (FRNT) FRNT ring coupling	Fast reconfiguration of network typology (FRNT) FRNT ring coupling
Mounting	DIN-mounted	DIN-mounted	DIN-mounted	DIN-mounted	Rack-mounted
Marine certificate	DNV	DNV	DNV	DNV	DNV
G3 compliant	Compliant	Compliant	Compliant	Compliant	Compliant
MTBF ⁽²⁾	500,000 hours	1,182,374 hours	630,000 hours	303,000 hours	123,000 hours

⁽¹⁾ With 500 mA USB load


⁽²⁾ according to MIL-HDBK-217K

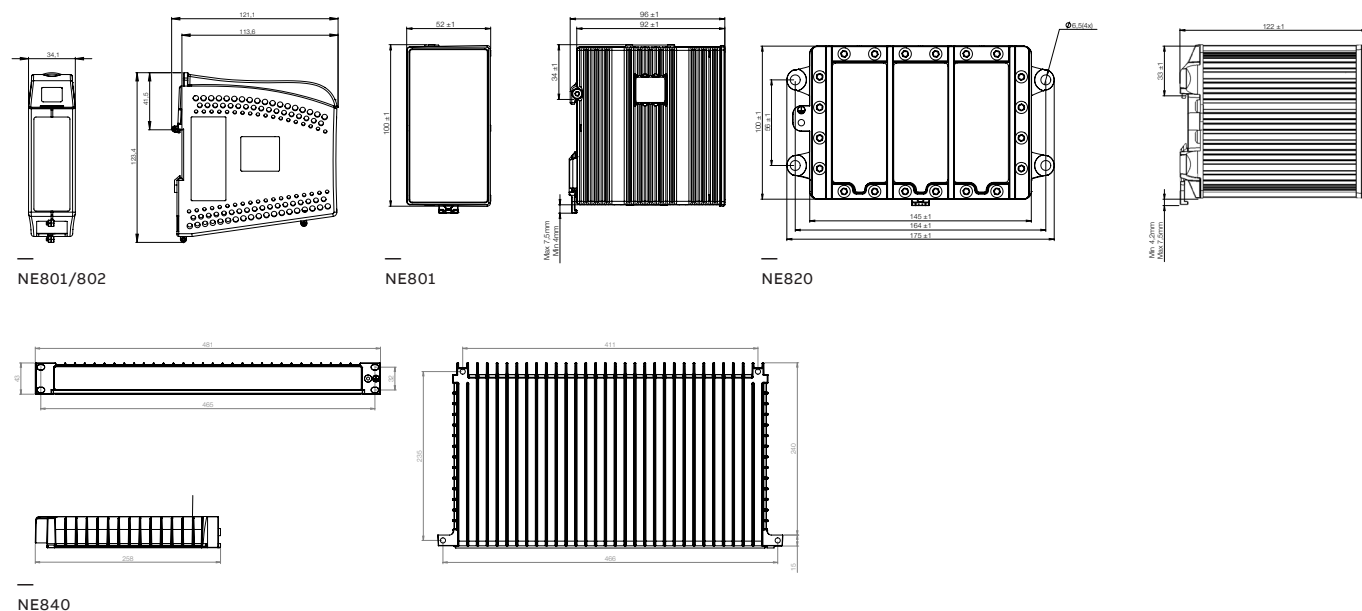

Specific feature	NE870	NE871
Article number	3BSE080239R1	3BSE080240R1
Managed	Yes	Yes
Routing	Yes	Yes
Firewall	Yes	Yes
Dimension (W x H x D)	134 x 100 x 122 mm	134 x 100 x 122 mm
Weight	1.5 kg	1.5 kg
Degree of protection	IP40	IP40
Operating voltage	16 to 60 VDC	16 to 60 VDC
Rated current	0.43 (0.60 ⁽¹⁾) A @ 20 VDC 0.19 (0.25 ⁽¹⁾) A @ 48 VDC	0.31 (0.48 ⁽¹⁾) A @ 20 VDC 0.15 (0.21 ⁽¹⁾) A @ 48 VDC
Ethernet TX	3 x 10/100/1000 Mbit/s, Ethernet TX, RJ-45 8 x 10/100 Mbit/s, Ethernet TX, RJ-45	3 x 10/100/1000 Mbit/s, Ethernet TX, RJ-45
Digital I/O	1 x 4-ports detachable screw terminal	1 x 4-ports detachable screw terminal
Console	1 x USB Micro-B connector	1 x USB Micro-B connector
Operating Temperature	-40 to +70 °C	-40 to +70 °C
Temperature Storage & Transport	-50 to +85 °C	-50 to +85 °C
Network redundancy	Redundant Network Routing Protocol (RNRP) Fast reconfiguration of network typology (FRNT) FRNT ring coppling	Redundant Network Routing Protocol (RNRP) Fast reconfiguration of network typology (FRNT) FRNT ring coppling
Mounting	DIN-mounted	DIN-mounted
Marine certificate	DNV	DNV
G3 compliant	Compliant	Compliant
MTBF ⁽²⁾	430,000 hours	430,000 hours



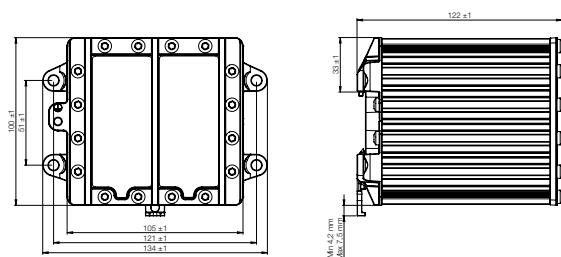


⁽¹⁾ With 500 mA USB load⁽²⁾ according to MIL-HDBK-217K**Agency approvals and standards compliance**

EMC	EN 50121-4	Railway applications – Electromagnetic compatibility – Emission and immunity of the signalling and telecommunications apparatus
	EN 55022	Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement
	EN 55024	Information technology equipment – Immunity characteristics Limits and methods of measurement
	EN 61000-6-1	Electromagnetic compatibility – Immunity for residential, commercial and light-industrial environments
	EN 61000-6-2	Electromagnetic compatibility – Immunity for industrial environments
	EN 61000-6-3	Electromagnetic compatibility – Emission standards for residential, commercial and light industrial environments
	EN 61000-6-4	Electromagnetic compatibility – Emission standard for industrial environments
	FCC part 15 Class A	
Safety	UL/IEC/EN 60950-1, IT equipment	
Marine	DNV Standard for Certification no. 2.4	





System 800xA Networks

Network switches

Network switches		Article no.	
	NE801 DIN-mounted 5 ports lightly managed switch, 4 10/100Mbit RJ45 ports & 100Mbit LC optical port. Redundant 24V DC-power input. Old type designation: DiLi 5P-1F(LC2)	3BSE080209R1	
	NE802 DIN-mounted 5 ports lightly managed switch; 4 10/100/1000Mbit RJ45 ports & 1Gbit SFP. Redundant 24V DC-power input.	3BSE080237R1	
	NE810 DIN-mounted 10 ports managed switch, 8 10/100Mbit RJ45 ports & 2 Gbit SFP ports. Redundant 24V DC-power input. Old type designation: DiMa 10P-2FG	3BSE080207R1	
	NE820 DIN-mounted 19 ports managed switch, 8 10/100Mbit RJ45 ports, 7 Gbit RJ45 ports & 4 Gbit SFP ports. Redundant 24V DC-power input. Old type designation: DiMa 19P-4FG-7RG	3BSE080208R1	
	NE840 Rack-mounted 19 ports managed switch, 8 10/100Mbit RJ45 ports, 7 Gbit RJ45 ports & 4 Gbit SFP ports. 110/230V AC-power input. Old type designation: RaMa 19P-4FG-7RG	3BSE080211R1	


System 800xA Networks

Network routers/firewalls

Network routers/firewalls		Article no.	
	NE870 DIN-mounted 11 ports RNRP router and firewall, 3 10/100/1000Mbit RJ45 ports and 8 10/100Mbit RJ45 ports. Redundant 24V DC-power input.	3BSE080239R1	
	NE871 DIN-mounted 3 ports RNRP router and firewall, 3 10/100/1000Mbit RJ45 ports. Redundant 24V DC-power input.	3BSE080240R1	


System 800xA Networks

Network accessories

Network accessories		Article no.	
	TK863 Cable.USB 2,5mm plug for NE810	3BSE080212R1	
	TK864 Micro USB Console cable for e.g. NE820, NE840, NE870 & NE871	3BSE080213R1	


System 800xA Networks

Modular Transceivers (SFPs)

Modular Transceivers (SFPs)		Article no.	
	The ABB range of Small Form-factor Pluggable (SFP) transceivers covers versions suitable for 100 Mbit/s and Gigabit applications. LC connectors are used as standard due their small size. Operating temperature specification: –40 to +85°C (–40 to +185°F)		
	PT801 Multimode, LC-connector, 2 km, 1310nm, 100Mbit/s Old type designation: MLC2	3BSE080214R1	
	PT802 Singlemode, LC-connector, 20km, 1310nm, 100Mbit/s Old type designation: SLC20	3BSE080215R1	
	PT803 Singlemode,BiDi, 20km, 1310nm TX, 1550nm RX, 100Mbit/s Old type designation: SLC20-BiDi-A	3BSE080223R1	
	PT804 Singlemode, BiDi, 20 km, 1550nm TX, 1310 RX, 100Mbit/s Old type designation: SLC20-BiDi-B	3BSE080224R1	
	PT805 Singlemode, LC-connector, 40km, 1310nm, 100Mbit/s Old type designation: SLC40	3BSE080216R1	
	PT806 Singlemode, BiDi, 40Km, 1310nmTX, 1550RX, 100Mbit/s Old type designation: SLC40-BiDi-A	3BSE080227R1	
	PT807 Singlemode, BiDi, 40Km, 1550nmTX, 1310RX, 100Mbit/s Old type designation: SLC40-BiDi-B	3BSE080228R1	
	PT808 Singlemode, LC-connector, 80km,1550nm, 100Mbit/s Old type designation: SLC80	3BSE080217R1	
	PT809 Singlemode, BiDi, 80km, 1310nm TX, 1550nm RX, 100Mbit/s Old type designation: SLC80-BiDi-A	3BSE080235R1	
	PT810 Singlemode, BiDi, 80km, 1550nm TX, 1310nm RX, 100Mbit/s Old type designation: SLC80-BiDi-B	3BSE080236R1	
	PT811 Singlemode, LC-connector, 120km,1550nm, 100Mbit/s Old type designation: SLC120	3BSE080218R1	
	PT812 Singlemode, BiDi, 120km, 1550nm TX, 1490 nm RX, 100Mbit/s Old type designation: SLC120-BiDi-B	3BSE080233R1	
	PT813 Singlemode, BiDi, 120km, 1490nm TX, 1550nm RX, 100Mbit/s Old type designation: SLC120-BiDi-A	3BSE080234R1	

System 800xA Networks

Modular Transceivers (SFPs)

Modular Transceivers (SFPs)		Article no.	
	PT814 RJ-45, 100m, 10/100Mbit/s TX	3BSE080232R1	
	PT831 Multimode, LC-connector, 550m, 850nm, SX, 1000Mbit/s Old type designation: GMLC550	3BSE080222R1	
	PT832 Multimode, LC-connector, 2km, 1310nm, SX+, 1000Mbit/s Old type designation: GMLC2	3BSE080225R1	
	PT833 Singlemode, LC-connector, 10km, 1310nm, LX, 1000Mbit/s Old type designation: GSLC10	3BSE080219R1	
	PT834 Singlemode, BiDi, 20km 1310nm TX, 1490nm RX, 1000Mbit/s Old type designation: GSLC20-BiDi-A	3BSE080229R1	
	PT835 Singlemode, BiDi, 20 km, 1490TX, 1310nm RX, 1000Mbit/s Old type designation: GSLC20-BiDi-B	3BSE080230R1	
	PT836 Singlemode, LC-connector, 50km, 1550nm, XD, 1000Mbit/s Old type designation: GSLC50	3BSE080220R1	
	PT837 Singlemode, LC-connector, 80km, 1550nm, ZX, 1000Mbit/s Old type designation: GSLC80	3BSE080221R1	
	PT838 Singlemode, LC-connector, 110km, 1550nm, EZX, 1000Mbit/s. Old type designation: GSLC110	3BSE080231R1	
	PT839 GCX100-Copper, RJ-45, 100m, 1000Base TX	3BSE080226R1	

Specifications Optical Transceivers

Product title	Type	Link speed (Mbit/s)	Indicative range (km)	Power budget (dB)	TX/RX wavelength (nm)
PT801	Multi mode	100	2	20	1310/1310
PT802	Single mode	100	20	17	1310/1310
PT803	Single mode, BiDi	100	20	18	1310/1550
PT804	Single mode, BiDi	100	20	18	1550/1310
PT805	Single mode	100	40	30	1310/1310
PT806	Single mode, BiDi	100	40	26	1310/1550
PT807	Single mode, BiDi	100	40	26	1550/1310
PT808	Single mode	100	80	30	1550/1550
PT809	Single mode, BiDi	100	80	29	1310/1550
PT810	Single mode, BiDi	100	80	35	1550/1310
PT811	Single mode	100	120	35	1550/1550
PT812	Single mode, BiDi	100	120	32	1550/1490
PT813	Single mode, BiDi	100	120	32	1490/1550
PT814	RJ45	10/100	0.1	-	-
PT831	Multi mode	1000	0.3–0.55	9	850/850
PT832	Multi mode	1000	1–2	1	1310/1310
PT833	Single mode	1000	10	11	1310/1310
PT834	Single mode, BiDi	1000	20	15	1310/1490
PT835	Single mode, BiDi	1000	20	15	1490/1310
PT836	Single mode	1000	50	20	1550/1550
PT837	Single mode	1000	80	24	1550/1550
PT838	Single mode	1000	110	30	1550/1550
PT839	RJ45	1000	0.1	-	-

IEC 61850 Engineering Tool for 800xA 6.0

With the built-in electrical control system, ABB's 800xA provides ways to be in control of the complete electrical system, from high-voltage switchgear to low-voltage motor control. Whether together with 800xA DCS or not, 800xA is the ideal solution as your Engineering Tool for Electrical Control Systems.

Reduce hardwired cabling on switchgear by connecting to intelligent devices, no matter which standard protocol you have.

The high reliability on digital communication improves the information flow from the devices and additional electrical measurement equipment can be removed. Simpler installations and reduced automation system are easier to engineer and maintain.

In addition, 800xA electrical control system allows the asset management strategies to be extended to electrical equipment. The result is reduced plant downtime and an optimal level of production.

IEC 61850 Engineering Tool

The engineering tool is licensed on a per seat basis, separate from System 800xA licenses. The detailed license process is described in Ref. Doc 2PAA113852.

This ABB IEC 61850 Engineering Tool version can be used for 800xA 5.1 FP4 and 800xA 6.0


IEC 61850 Engineering Tool for 800xA 6.0 – Project Engineering and End Customer use

This ABB IEC 61850 Engineering Tool version IET 600 5.x is used ABB wide and can be ordered from one central place ABB Electrification Products.

Product type IET 600 5.x – Integrated Engineering Tool with USB-dongle.

This tool version is released for Microsoft Windows 7/8.1 and Microsoft Server 2008/2012.

This license is a one-time fee (no renewal is necessary) and can be ordered via the following Web-Front end: ABB Common Configurator Platform ([CCP Web-Front end](#))

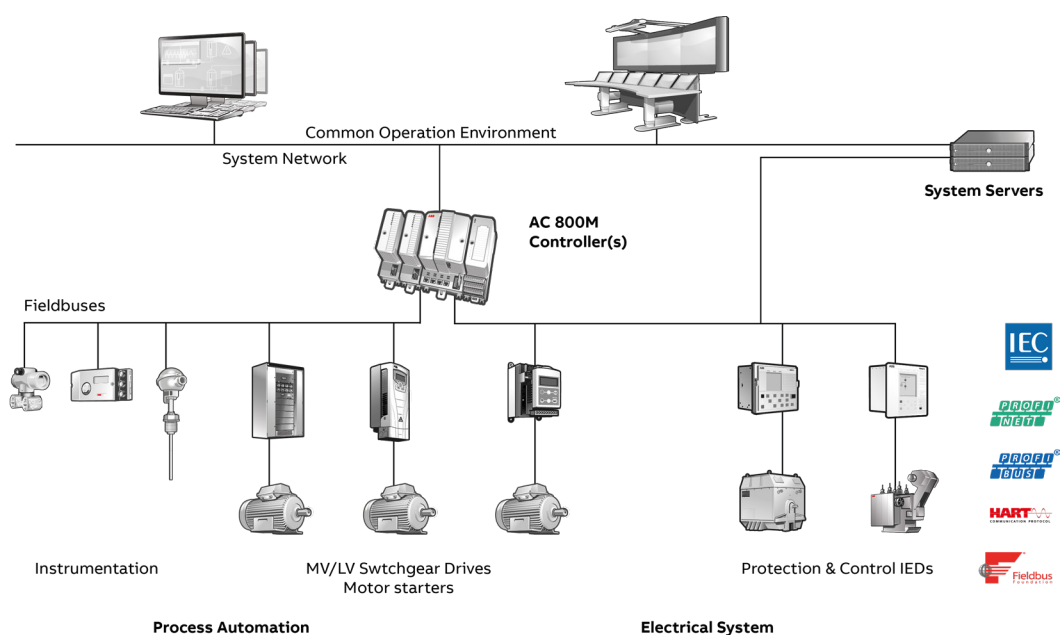

Extended Warranty Time

S800 I/O, S900 I/O, Fieldbus and AC 800M

Extended warranty time on hardware for S800 I/O, S900 I/O, Fieldbus and AC 800M	Article no.	
<p>Terms and conditions for the supply of products from Local Division Process Automation, LBU Control Technologies within ABB AB in Sweden is valid.</p> <p>Note that the price for the Extended Warranty Time order will be calculated as a percentage of the affected S800 I/O, S900 I/O, Fieldbus and AC 800M articles in the accompanying order.</p> <ul style="list-style-type: none">Item A100 => 3% of the affected HW S800 I/O, S900I/O, Fieldbus and AC 800M articles in the accompanying order.Item A110 => 6% of the affected HW S800 I/O, S900I/O, Fieldbus and AC 800M articles in the accompanying order.Item A120 => 9% of the affected HW S800 I/O, S900I/O, Fieldbus and AC 800M articles in the accompanying order.		
Extended Warranty 12 additional months – S800 I/O, S900 I/O, Fieldbus and AC 800M	3BSE049878R1	
Extended Warranty 24 additional months – S800 I/O, S900 I/O, Fieldbus and AC 800M	3BSE049878R2	
Extended Waranty 36 additional months – S800 I/O, S900 I/O, Fieldbus and AC 800M	3BSE049878R3	



S800 I/O



AC 800M controller



S900 I/O

ABB Ability™ System 800xA

References

This page gives you references and links to more useful ABB Ability™ System 800xA® information. For more information about System 800xA please also visit our web: **solutions.abb/800xA**

System 800xA References

- [1] System 800xA 6.0.3.4 System Guide Summary, 3BSE078159 en F
- [2] System 800xA Released User Documentation, 3BUA000263-6034
- [3] For more information about System 800xA please visit: **abb.com/800xA**
- [4] For more information about System 800xA hardware please visit: **800xahardwareselector.com**
- [5] For information and support about Distributed Control Systems, please visit: **solutions.abb/controlsystems**

System 800xA Hardware Selector

Choosing the right hardware made easy

When planning your new project or expansion, finding the right hardware can be a challenge. Check out the new web based tool that helps you find the hardware you need in a few clicks:

- Quick filtering according to your needs
- Compare different units at a glance
- Find matching termination units
- Make lists and export everything in nice looking datasheets

Start using the System 800xA Hardware Selector now at: **800xahardwareselector.com**

The screenshot shows the ABB System 800xA hardware selector web application. At the top, there is a navigation bar with the ABB logo, 'System 800xA', 'Compact Product Suite', and 'Contact'. Below the navigation bar, the main heading is 'System 800xA hardware selector'. A sub-heading reads 'ABB PROCESS AUTOMATION'. The main content area contains a description of the System 800xA as a DCS (Distributed Control System) and an Electrical Control System, highlighting its safety and collaboration capabilities. It also mentions that users can choose and compare hardware, filter by needs, and download pdf-outlines. On the right side, there is a sidebar with a search icon and a list of featured products, each with an 'ARTICLE' link and a brief description: 'ABB Ability™ System 800xA 6.1.1 is an easy call to make.', 'Panel 800 Version 6.2', 'ABB Ability™ System 800xA Select I/O Virtual Cabinet', and 'The power of integration'. Below the main content area, there is a section titled 'Select product' with a grid of six categories, each with a 'SHOW PRODUCTS' button: Communications, Controllers, I/O Systems, Networks, Panels, and Power supplies & Voters.

solutions.abb/800xa
solutions.abb/controlsystems
800xahardwareselector.com

800xA is a registered trademark of ABB. All rights to other trademarks reside with their respective owners.

We reserve the right to make technical changes to the products or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not assume any responsibility for any errors or incomplete information in this document.

We reserve all rights to this document and the items and images it contains. The reproduction, disclosure to third parties or the use of the content of this document – including parts thereof – are prohibited without ABB's prior written permission.

Copyright© 2024 ABB
All rights reserved