
MEASUREMENT & ANALYTICS

Level products

Measurement made easy



Introduction

ABB is a leading global manufacturer of state-of-the-art instruments for liquid and bulk solids level measurement. Thanks to the technological heritage of K-TEK, our level measurement products demonstrate versatility in numerous applications, affording our customers a variety of practical and innovative solutions for their installation needs. ABB has numerous installations worldwide in applications such as oil and gas production, pulp and paper processing, mining and construction, food and beverage and chemical processing. The company operates offices, service locations and R&D facilities around the world.

Contents

004–005	Magnetic level gauges
006–007	Magnetic level gauge switches
008	Magnetic level gauge custom solutions
009	Level measurement accessories - Complementary products
010–012	Magnetostrictive level transmitters
013–014	Guided wave radar level transmitters
015	Laser level transmitter
016-017	Ultrasonic level transmitters

Magnetic level gauges

KM26 magnetic level gauges are manufactured to suit your specific process requirements.

KM26 magnetic level gauges

ABB's KM26 Magnetic Level Gauge provides custom engineered solutions to liquid level applications in industries such as oil and gas, refinery, chemical, petrochemical, power generation and many more. The KM26 Magnetic Level Gauge has proven itself for over 45 years to be a safe, reliable and maintenance free solution for total and/or interface level measurement.

ABB offers the standard KM26 Magnetic Level Gauge with a chamber of virtually any non-magnetic material, extruded process connections, custom engineered floats and all accessories with 316 stainless steel construction. ABB also offers a dual chamber redundant level system, which has a proven record of improving feedwater heater efficiency and reliability in power plants around the world.

- Highly visible level indication with no process fluid in contact with the glass
- All construction in-house by code certified welders
- Float designed and weighted for maximum accuracy
- Transmitter and switch options that can be installed, adjusted and maintained with no process interruption
- Safe for corrosive, flammable, toxic, high-temperature and high-pressure applications
- Rugged design – low or no maintenance
- ATEX constructional safety, IP68 and PED certifications; EAC TRCU approvals

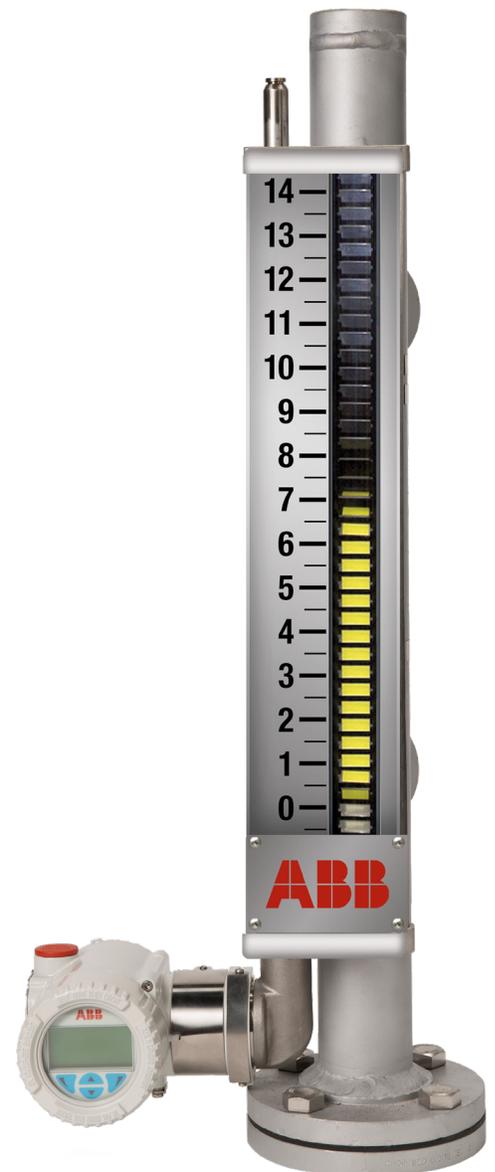


Table 01

Process Capabilities	
Pressure	Full vacuum to 5000 psi (351 kg/cm ²)
Temperature	- 320 to 1000° F / - 196 to 538° C
Specific gravity	0.25° specific gravity
Viscosity	All liquid viscosities
Interface	Interfaces as low as .03ΔSG


KM26 magnetic level gauge

The MagWave® dual chamber magnetic level gauge

The MagWave® dual chamber magnetic level gauge combines a highly visible magnetic level indicator with the precise level measurement of a LWT Series guided wave radar transmitter. Redundant level control can be achieved by adding an additional magnetostrictive transmitter or switch to the float chamber.

The MagWave® is a level measurement system which combines a highly visible magnetic level indication with an output from a Guided Wave Radar Transmitter. The Magwave features two separate close-coupled chambers for the level indicator float and the Guided Wave Radar antenna. Using single probe radar transmitters in the standard 1-1/2 inch chamber provides the measurement capabilities of coaxial style probes without the potential for fouling due to buildup. A separate float chamber allows the float to travel unobstructed throughout the range of measurement. Redundant level control can be achieved by adding an LMT Series magnetostrictive transmitter or switches to the float chamber.

- Redundant level measurement
 - guided wave radar
 - magnetostrictive transmitter
- Low cost of ownership
- Safe and simple installation
- 5 year warranty
- High visibility indicator
- Optional vent, drain and isolation valves
- Insulation for high and low temperature applications

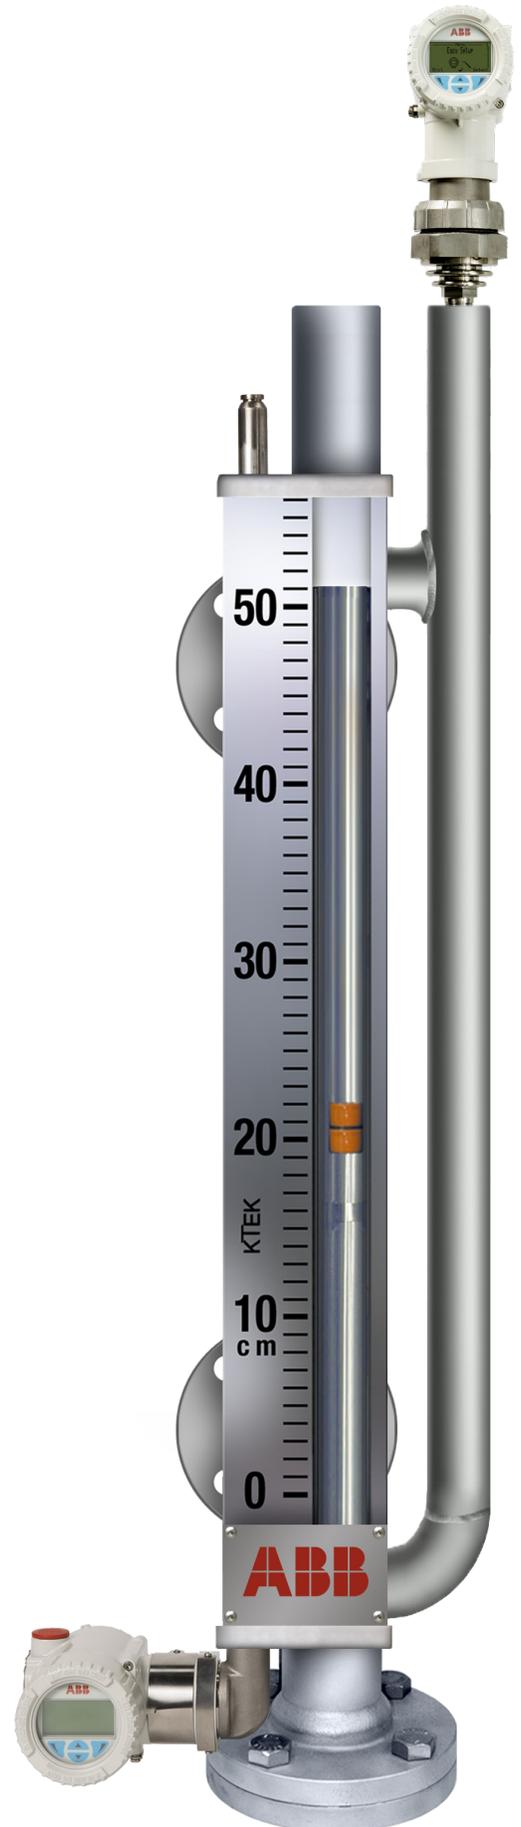

MagWave® dual chamber magnetic level gauge

Magnetic level gauge switches

Electric and pneumatic switches for point level safety alarm and control



LMS100



MS40/EX

	LMS100	MS40/EX
Switch type	Electric	Electric
Hazardous area rating	ATEX/IECEX, cFMus	FM,CSA
Enclosure	Hermetically sealed/explosion proof, NEMA 4x/IP66/67, 1/2" FNPT	MS40: stainless steel, NEMA 4x/IP56, 3/4 in FNPT cable connection MS40EX: stainless steel/explosion proof, NEMA 4X/IP56, 3/4 in FNPT
Switching mechanism	Reed Switch, AC/DC 1 amp, +/- 0.75" (1.9cm) deadband, SPDT	Cam driven, snap-action; AC: 10 amp, DC: 1/2 amp, 13/16 in deadband, DPDT
Pressure	N/A	N/A
Process temperature	Max 800°F/427°C with Insulation Pad options	Min -60° F/-51° C; Max. 300° F/149° C, 600° F/316° C with IP option
Application	High corrosive, hazardous area	High corrosive, hazardous area



PS45

Pneumatic

ATEX

Stainless steel, NEMA 4x/IP56,
1/8 in MNPT

1 in deadband,
pneumatic signal

15 to 100 psig operating pressure

Min. 0°F/-18°C; Max. 180°F/82°C,
450°F/232°C with IP option

High-corrosive, hazardous area
pneumatic



MS41

Electric

FM, CSA, EAC
and ATEX/IECEx certified

Stainless steel, dual compartment, hermetically sealed,
explosion proof, NEMA 4X/IP56, 1/2" MNPT

Cam driven, snap-action; AC: 10 A, DC: 2.6 A

N/A

Min. -320°F/-195°C with option
Max. 300°F/149°C, 1000°F/538°C with Insulation Pad options

High temperature, vibration and high-corrosive

Magnetic level gauge

Options and custom solutions

Indicators

Shuttle and bargraph indicators are available with the following:

- Process temp to 1000° f/ 538° c
- IP68, hermetically sealed tube
- Shuttle indicator
- Magnetically interlocked bargraph indicator for vibration resistance
- Standard or custom rulers in stainless steel or plastic
- Metric, US units or custom
- Field replaceable
- Single bar graph indicators available in:
 - Yellow/Black
 - Red/White
 - Red/Green
 - Red/Black



Dual bar graph indicator

Shuttle indicator

Single bar graph indicators

Float design and construction

K-TEK floats are individually engineered for each application with the following:

- Minimum positive buoyancy of 75 grams
- Magnetic ring placed at liquid level
- Indicated level is the true level
- Hermetically sealed, no vents
- 360° magnetic ring
- Optional coated floats (Halar, Tefzel, Teflon-S)



Teflon S coated




360° magnetic ring


Old Glass Gauge Technology vs New Magnetic Gauge

Replacement of the instrument bridle with a K-TEK KM26, LMS100/MS41 and two PS45 switches eliminates:

- Multiple valves and pipe fittings
- Two gauge glasses including 16 U-bolts and nuts with possible leaks and fugitive emissions
- Readability problems with gauge glasses



Old level measurement standard



New level measurement standard with K-TEK products

Extruded outlets

Available in a variety of materials including:

- All stainless steel
- Alloy 20
- Alloy C-276
- Sizes depend on material, typically 1", 1-1/2" and 2"



Level measurement accessories

Complementary products that help provide a complete level solution

EC

- Provides for easy isolation from process vessel
- Use with AT100, LMT100, MT5000, LWT310 transmitters to replace conventional displacer type transmitters and controllers
- Designed to ANSI/ASME B31.1, B31.3 as applicable
- Certification to NACE MRO175 and NACE MRO103 available

ST95

- High visibility, magnetically coupled barrier fluid level indication
- Magnetically coupled high/low level switches available
- All stainless steel construction available
- Designed for barrier fluid specific gravity requirements
- Switches for high and/or low level
- LMT200 magnetostrictive and/or LWT310 Guided Wave Radar level transmitter available as options
- Cooling coil available
- Fill, vent and drain valves available
- ASME code stamp and PED certification available



EC External chamber



ST95 Seal fluid supply tank for barrier fluid systems

Magnetostrictive level transmitters

Gauge mounted transmitters

ABB provides the only magnetostrictive level transmitters in the world to be certified for use in IEC 61508 SIL2 and SIL3 rated control loops.



With over 200,000 magnetostrictive transmitter installations worldwide, the LMT Series Magnetostrictive Level Transmitter continues to provide the highest accuracy and repeatability for liquid level applications in the oil and gas, power generation, chemical, food and beverage industries and many more. These transmitters are used extensively around the world to provide continuous level indication, and transmission of an analog and/or digital signal for monitoring or control. The Magnetostrictive Level Transmitter versatility allows direct in-tank installation or externally mounted to a magnetic level gauge. 4-20 mA HART and FOUNDATION Fieldbus protocol options make the magnetostrictive level transmitters compatible with most control systems.

Magnetostrictive level transmitters

Gauge insertion transmitters

LMT200

Our floats are individually engineered for each application with the following:

- Certified for use in SIL 2/3 applications per IEC61508
- High accuracy: .01% of full scale or +/-1.27 mm (+/- 0.05 in.), whichever is greater
- Superior piezo ceramic sensor (Patent # 5,473,245)
- Local indication with LCD display
- Factory calibrated to customer's specification
- Never requires recalibration: set it & forget it
- Dual compartment housing with separate field terminal compartment
- Loop powered
- 50 ft./15 m rigid probe length maximum
- Total and/or interface level measurement
- Field replaceable/upgradable electronics module
- Optional surge protection
- Built in RFI/EMI filter
- 4-20 mA HART and FOUNDATION Fieldbus



Magnetostrictive level transmitters

Direct insertion transmitters

The K-TEK Level product line provides the only magnetostrictive level transmitters in the world to be certified for use in IEC 61508 SIL2 and SIL3 rated control loops.

LMT100

- Certified for use in SIL 2/3 applications per IEC61508
- High accuracy: .01% of full scale or +/-1.27 mm (+/- 0.05 in.) mm, whichever is greater
- Superior piezo ceramic sensor (Patent # 5,473,245)
- Local indication with LCD display
- Factory calibrated to customer's specification
- Never requires recalibration: set it & forget it
- Dual compartment housing with separate field terminal compartment
- Loop powered
- Up to 30 ft./9 m rigid probe length
- Total and/or interface level measurement
- Field replaceable/upgradable electronics module
- Optional surge protection
- Built in RFI/EMI filter
- 4-20 mA HART and FOUNDATION Fieldbus
- Safely remove sensor without exposure to process.
- Several non-wetted sensor well designs
- Flexible Sensor with insertion well
- Available in Halar *FEP sensor inserted into 1 in. segmented 316/316L sensor well
- Available in braided stainless steel inserted into a 5/8 in. OD rigid probe to 15 ft./4.75 m
- Up to 75 ft./22 m probe length maximum



LMT100 Direct insertion magnetostrictive liquid level transmitter with removable flexible sensor



LMT100 Direct insertion magnetostrictive liquid level transmitter

Guided wave radar level transmitters

Radar level detection for liquids and solids

Stable readings in the most challenging environments. Now with LevelExpert™: the expert inside.



LWT series

With fast and reliable settings, ABB's LWT300 series of instruments emphasizes measurement made easy. With its LevelExpert™ technology based on 20 years of experience, simply enter installation data and basic process conditions, and let LevelExpert™ do the rest: no echo mapping or baseline correction required. Unlike traditional guided-wave radars that use device parameters requiring multiple adjustments, the LWT300 series of instruments does it for you. The instrument uses built-in intelligence to differentiate between the actual level and other false signals. It also keeps monitoring all these false signals while maintaining a reliable level reading. It is like having a level expert in each device. ABB's LWT300 series transmitters are equipped with on-board diagnostics that can be used for safety monitoring, improved reliability, downtime reduction, and performance verification. Standard on-board diagnostics monitor minimum and maximum electronics temperature, input voltage, probe loss or breakage, buildup detection and leakage of the primary process seal. These diagnostic features assist you in troubleshooting common problems without extensive testing and allow device health monitoring without requiring removal from the process or taking the device offline, thus saving valuable time and improving uptime.

Guided wave radar level transmitters

Radar level detection for liquids and solids

LevelExpert™ concentrates 20 years of industrial level measurement experience into an intelligent instrument made to accurately detect levels, even in the most demanding conditions.

Forget about baseline mapping and echo selection; LevelExpert™ knows how to find the right level through the clutter. The expert is now inside your guided-wave radar.

LWT300 series instruments cover a wide range of applications. They can meet your needs for applications up to 204 °C (400 °F) and 207 bars (3000 psi).

LWT series

- With LevelMaster™ for fast and easy setup
- Distance up to 197 ft. (60 m)
- Accuracy: 2 mm (5/64 in.)
- Resolution: 1 mm (3/64 in.)
- Temperature up to 400°F (204°F)
- Pressure up to 3000 psi (207 bar)
- Response time: 400 ms
- Temperature drift (digital): ± 0.2 mm/10°C (max ± 2.5 mm (1 in.))

MT5000

- Reliable level measurement over varied process conditions
- Distance 2 to 217 ft (66 m)
- Temperatures to 800° F (427° C)
- Pressures to 5000 Psi/344 bar
- Standardization reduces inventory and training requirements
- Modular electronics

MT5100

- Provides both lower and upper level fluid indications
- Flooded or non-flooded chambers
- Transmission of interface and upper fluid signals with the use of the optional RI100 repeat indicator or via digital signal.
- Patented weak interface signal detection

MT5200

- Used in low dielectric liquid and bulk solids applications
- Unaffected by dust
- No moving parts
- Unaffected by feed flow
- Can measure levels with dielectric constants as low as 1.3



LWT series

Laser level transmitters

Bulk solids and liquid non-contact laser level measurement

The ABB family of laser level measurement products provides solutions for measuring the level of any bulk solids or liquids for inventory or process control.

Using narrow laser beams and advanced processing algorithms, they provide simple and reliable non-contact level measurement in industrial environments.

LLT100 laser level transmitter

- Ideal for measuring the level of any solid or liquid without contact
- Range up to 330 ft. (100 m) for level of solids
- Range up to 100 ft. (30 m) for level of liquids
- < 0.3° beam divergence = no false echoes.
Simple to setup and not affected by changes in environment.
- HART communication
- Explosion proof Class 1 / Division 1
- 3A approval (Hygenic)



LLT100 Laser level transmitter

LM80 laser level transmitter

- Ideal for plastics pellets, grain silos, crushers & rock silos, positioning applications without contact
- Range up to 330 ft. (100 m) for level of solids
- Range up to 500 ft. (150 m) for positioning
- No beam divergence = no false echoes. Simple to setup and not affected by changes in environment.
- Embedded laser pointer



LM80 Laser level transmitter

LM200 laser level transmitter

- Ideal for long range positioning and long range level measurement
- Range up to 660 ft. (200 m) for level of solids
- Range up to 1310 ft. (400 m) for positioning
- Embedded laser pointer
- Same easy setup as LM80



LM200 Laser level transmitter

Ultrasonic level transmitters

Level by sound knowledge

ABB's LST series has the only ultrasonic level transmitters that use dynamic GAP technology to locate the correct echo. The LST utilizes the minimum amount of GAP (Gain, Amplitude and Power) at every possible distance within the measuring range. This simply means that we reduce the power to give you the most accurate reading, and then enough power to push through the dustiest environments.

LST300 – the most powerful ultrasonic level transmitter in a compact form

- 2-wire instrument with HART digital communication
- High accuracy of ± 2 mm or 0.2 % of full span (the larger one)
- Up to 10 m measurement range
- Wide temperature range of -40 to 85 °C with temperature compensation ensuring accurate measurement in case of temperature fluctuation
- Beam angle 10° with false echo filtering for narrow spaces
- Easy installation with graphic echo display, and smart diagnostic and easy setup menu
- Unique GAP technology ensures the best performance under any condition
- IP66/67/68 and NEMA 4X (can submerge to 2 m depth for 24 hours)
- ATEX, IEC & FM Intrinsic safe and non-sparking approved

LST400 – Make all the control easy through remote transmitter

- 4-wire instrument with HART digital communication
- Up to 30m measurement range
- 5 configurable relays / 8A
- Configurable as open channel flow meter
- Preconfigured flow curves for most common channels
- 21-point linearizer for calibration of non-linear vessels
- Pump control and cycling
- Automatic variable gain & power for difficult applications
- Integrated analytical software
- FM general purpose approved
- IP66/67/68 for sensor and IP65 for transmitter



LST300 Ultrasonic level transmitter



LST400 Ultrasonic level transmitter

Ultrasonic level transmitters

Level by sound knowledge

LST200

- Measurement range 0.35 to 8.00 m (13.78 to 314.96 in)
- Beam angle: (@ -3 dB, full angle) : 10°
- Accuracy and Repeatability ± 3 mm or 0.25% of full span, whichever is larger
- Resolution : 1 mm
- Update time: 2 s
- Analog output two-wire output: 4 to 20 mA related to level/distance/volume/flow
- Full compensation for temperature effects
- Smart algorithm with noise filtering for challenging applications
- Easy setup menu and clear backlight for easy configuration
- Easy installation with real-time graphic echo display and smart diagnostic menu
- Easy open channel flow measurement setup and batch operation with ABB FDI solution
- Reliable anti-condensation feature based on ABB patented active surface technology
- Reliable protection grade IP66/IP68 which is typical for water and wastewater industry



reddot winner 2021
industrial design

LST200 Ultrasonic level transmitter

ABB Inc.

Level Measurement Products

3400, Rue Pierre-Ardouin

Québec (Québec) G1P 0B2

Canada

Tel: +1 800 858-3847 (North America)

Tel: +1 418 877-2944 (other countries)

Fax: +1 418 877-2834

E-Mail: Lasers@ca.abb.comRadar E-Mail: radars@ca.abb.comService e-mail: laserscanner.support@ca.abb.com**ABB Engineering (Shanghai) Ltd.**

No.4528, Kangxin Highway,

Pudong New District

Phone: +86 10 64231407 (China)

Phone: +86 21 61056413 (out of China)

Service: +86 4008209696

Fax: +86 10 64371913

E-Mail: sales-support.kq@cn.abb.comService e-mail: instrumentservice.abbchina@cn.abb.com**ABB Inc.**

125 E. County Line Road

Warminster, PA 18974 USA

Tel: +1 215 674 6000

Fax: +1 215 674 7183

E-mail: us-iama-quotes@abb.comService e-mail: ktek-service@us.abb.comwww.abb.com/level

Note:

The information contained in this document is for general information purposes only. While ABB strives to keep the information up to date and correct, it makes no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information, products, services, or related graphics contained in the document for any purpose. Any reliance placed on such information is therefore strictly at your own risk. ABB reserves the right to discontinue any product or service at any time.

© Copyright 2022 ABB. All rights reserved.

