


MULTIPLES OF CURRENT RATING (In)

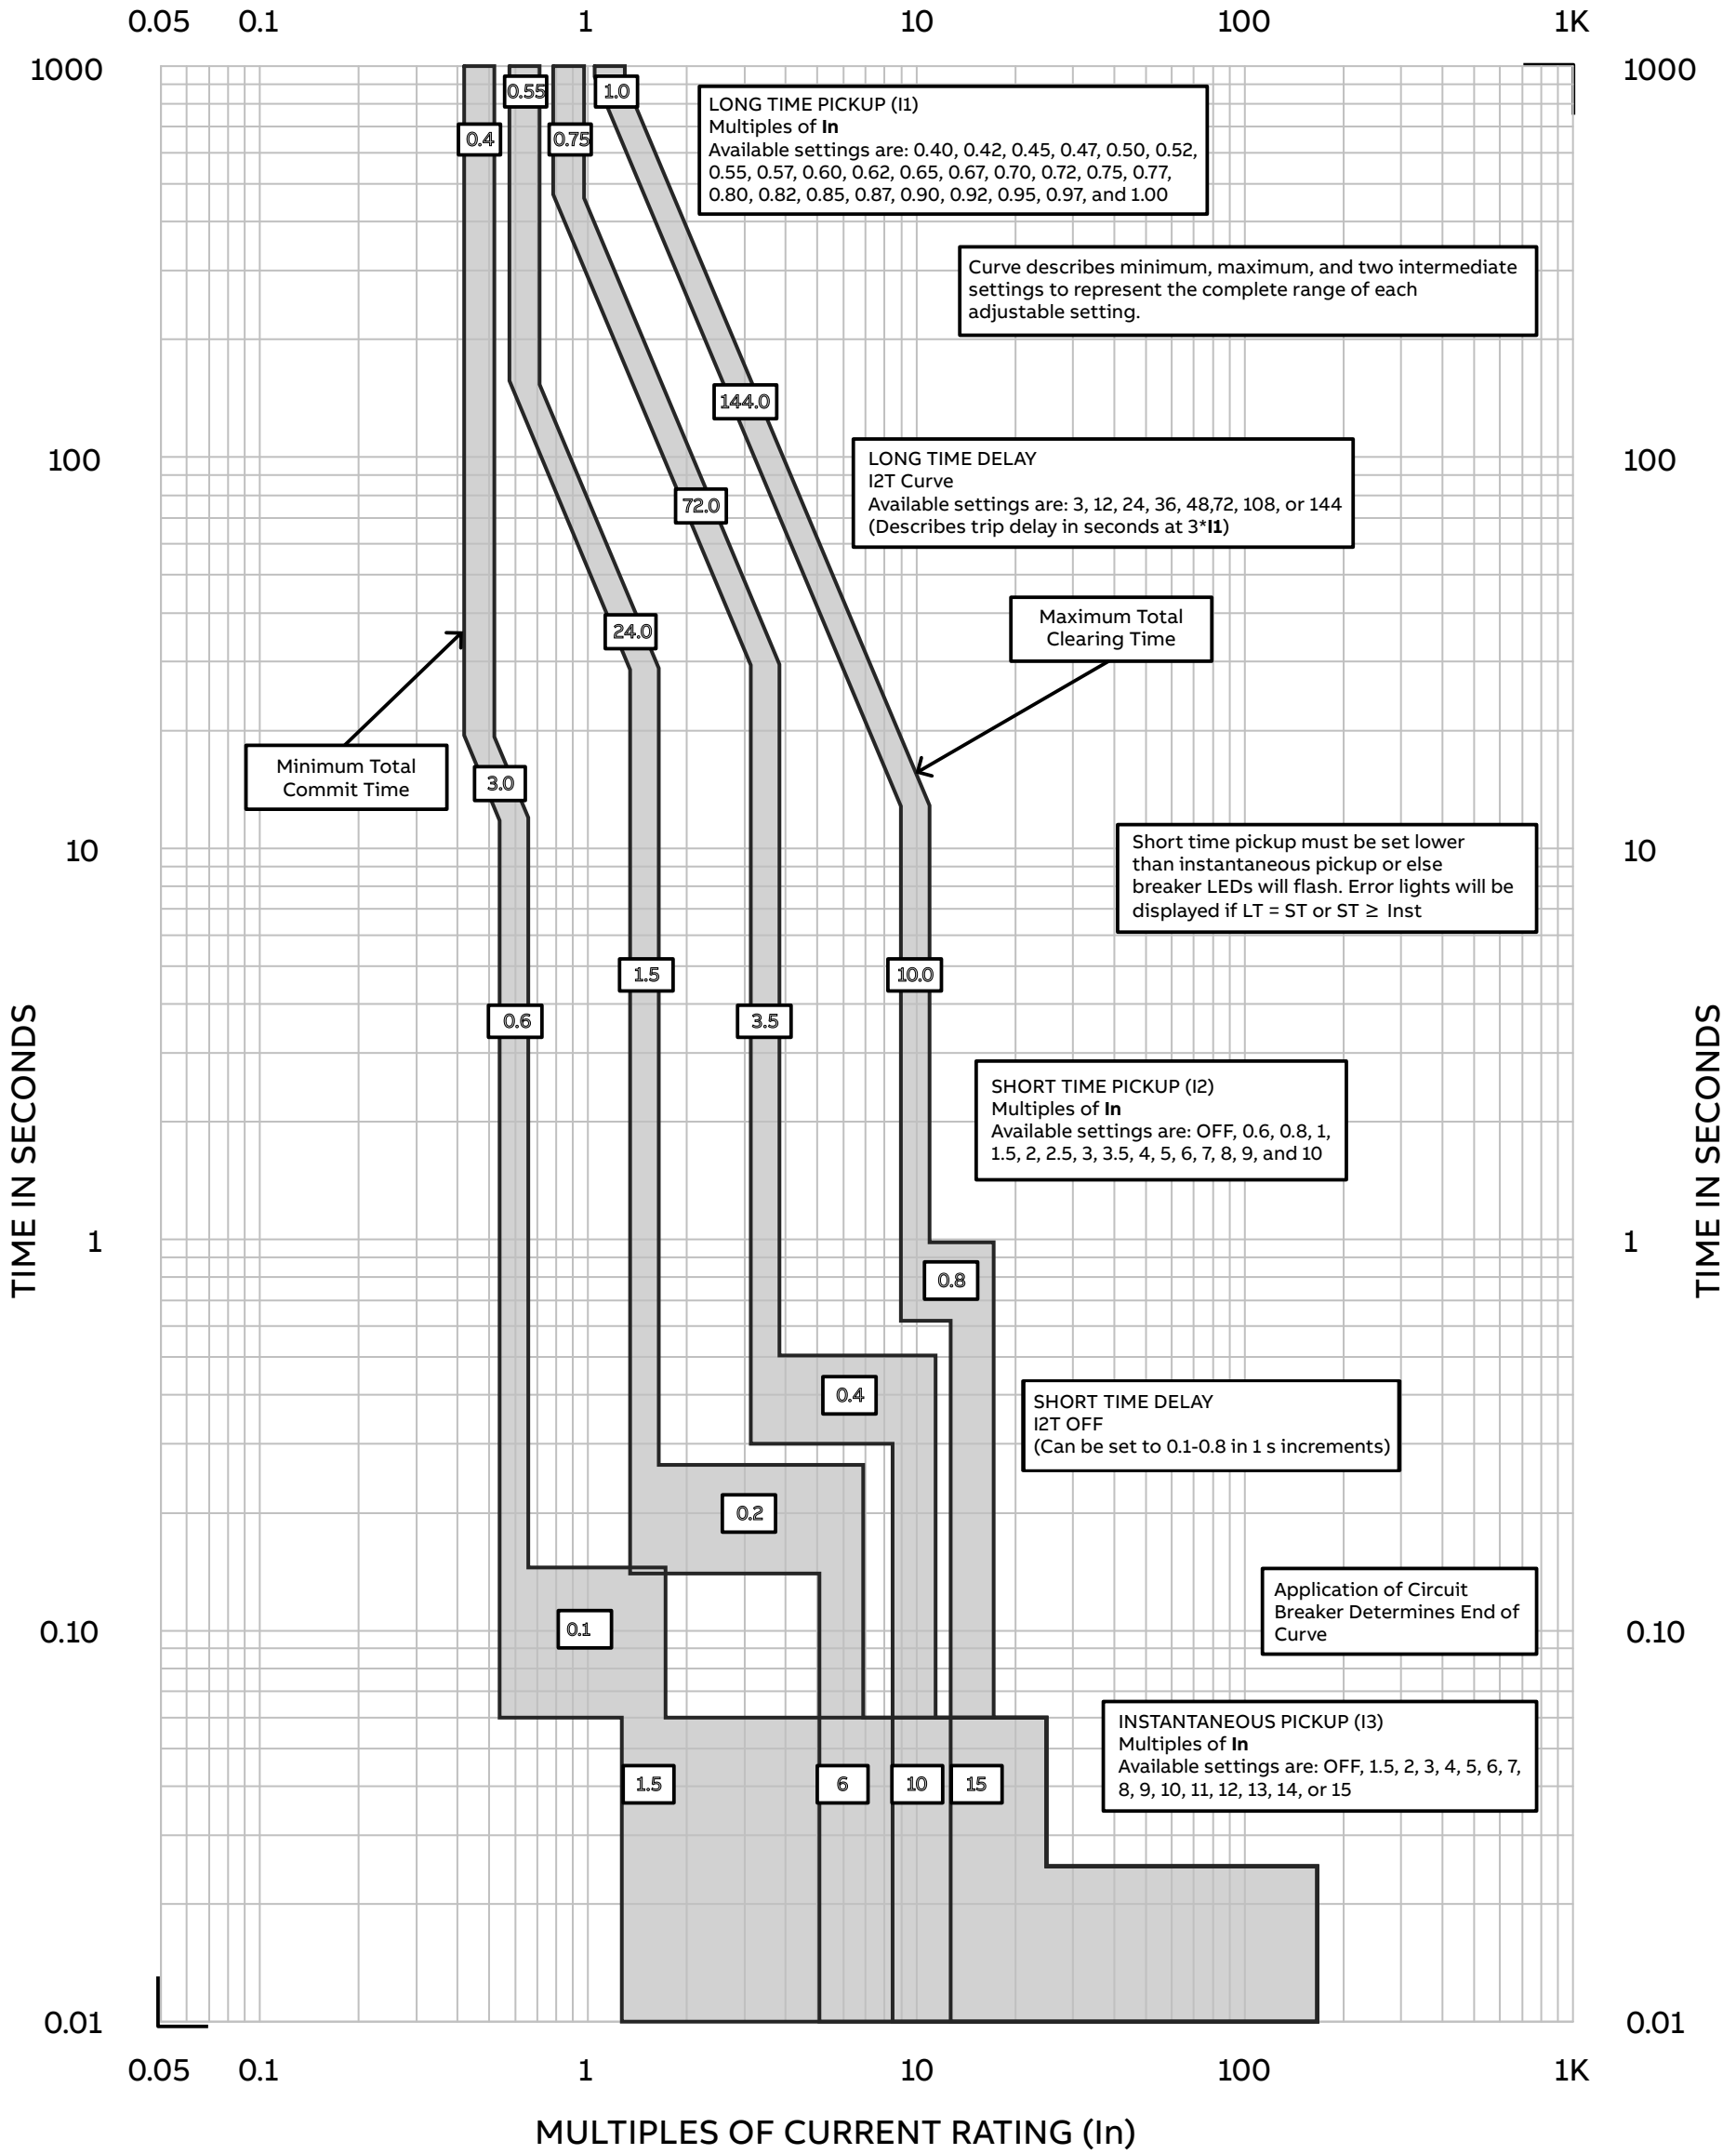

Time Current Curve

Available Ratings (Amperes)

Type	Model	Trip Unit	Frame Amps	Current Rating (In)
MCCB	XT7	Ekip DIP	1200	600 1000 800 1200

Voltage Rating: 600Vac, 50 to 60 hz systems

electrification.us.abb.com

Molded Case Circuit Breaker

Type Tmax XT7/7M with Ekip DIP LSI/LSIG Trip Unit
Short time I2T OFF

Operating Conditions: Curve represents trip with no prior load. Curves apply at 50 to 60 Hertz with reference ambient temperature of 40°C at 2000m altitude with three phase fault applied. Refer to technical guide from the UL catalog for more information regarding thermal application.

Instantaneous Override: When instantaneous protection is turned off, the breaker will immediately trip for any current that is equal to or greater than **20,000A** plus 50% or minus 10%.

Ground Fault: Refer to TCC 9AKK108468A0535 for ground fault curve