



ABB i-bus<sup>®</sup> EIB/KNX

**EIB Power Supply, 160 mA**

**SV/S 30.160.5**

ABB i-bus<sup>®</sup> EIB / KNX



# SV/S 30.160.5 EIB Power Supply, 160 mA, MDRC



## Device Description

- Power supply with integrated choke for supplying and monitoring of the ABB i-bus<sup>®</sup> system voltage.


## Application fields

- Small residential projects
- Hotel room application



# SV/S 30.160.5 EIB Power Supply, 160 mA, MDRC

## Hardware

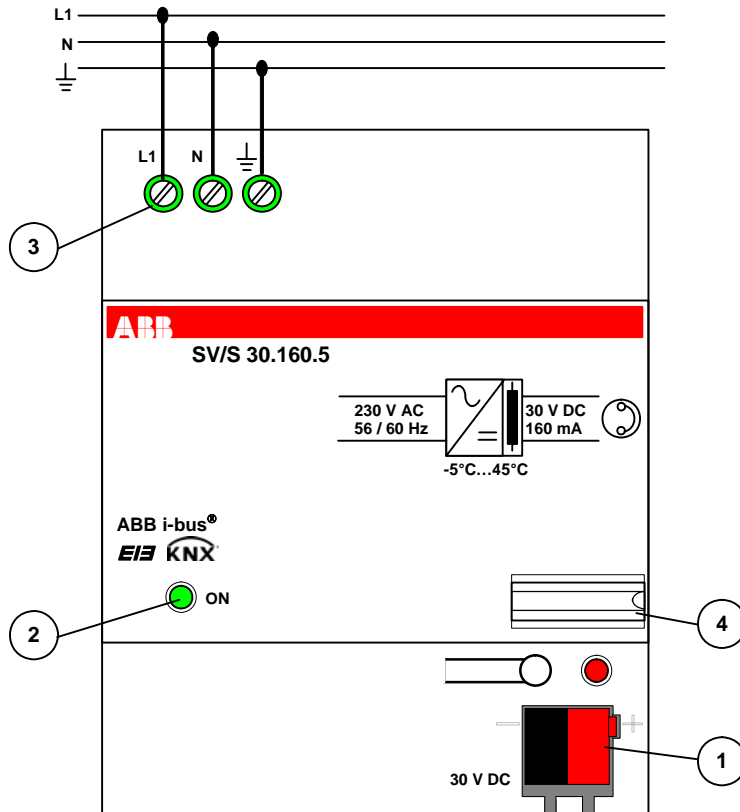

- ① Bus Connection Terminal
- ② Operation-LED
- ③ Mains Supply
- ④ Label Carrier



# SV/S 30.160.5 EIB Power Supply, 160 mA, MDRC

## Technical Data

### ■ Power supply

- Nominal voltage 230 VAC +10/-15%, 45 ... 65 Hz
- Power consumption < 8 VA
- Power loss < 3 W

### ■ EIB/KNX Output

- Nominal voltage 30 VDC +1/-2 V, SELV
- Nominal current 160 mA, short-circuit-proof
- Mains failure back-up time 200 ms

### ■ Operating and display elements

- Green LED ON: In operation



# SV/S 30.160.5 EIB Power Supply, 160 mA, MDRC

## Ordering Details

Type	Designation	Order-No.
<b>SV/S 30.160.5</b>	EIB Power Supply, 160 mA, MDRC	2CDG 110 085 R0011

