


We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden.
© ABB '19

On-load tap-changer type (V)UCGL./F, (V)UCLL./F, UCCL./F,
12 positions, linear switching.
Max. effective No. of turns in pos. 1.
The tap-changer is delivered set in pos. 7,
the preceding pos. was 6.

Lindningskopplare typ (V)UCGL./F, (V)UCLL./F, UCCL./F,
12 lägen, linjär koppling.
Max antal effektiva varv i läge 1.
Lindningskopplaren levereras inställd i läge 7,
föregående läge var 6.

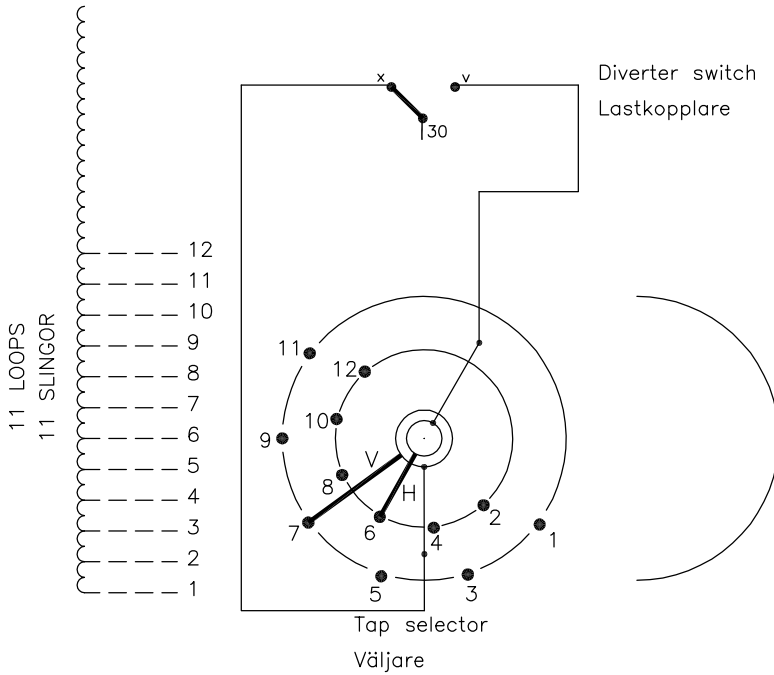

Pos. Läge	Tap selector and diverter switch connect	
1	1-V-x	30
2	2-H-v	
3	3-V-x	
4	4-H-v	
5	5-V-x	
6	6-H-v	
7	7-V-x	
8	8-H-v	
9	9-V-x	
10	10-H-v	
11	11-V-x	
12	12-H-v	

The tap-changer is shown in pos. 7,
the preceding pos. was 6.
The tap selector is seen from above.
Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 7,
föregående läge var 6.
Väljaren sedd uppifrån.
Kontaktarm V ligger över kontaktarm H.

Continuous lines show leads included in the
tap-changer. Dashed lines show leads belonging
to the cleats and leads.

Heldragna linjer visar ledare som ingår i
lindningskopplaren. Streckade linjer visar
ledare som tillhör anslutningsdonet.

Sheet	Cont										
	Year	Week									
Form No.	Dept										
	Rev Ind	Revision	Appd	Year	Week						
Design checked by	Accepted by qual control L.Oberg		Accepted for prod by M.Haggmar		Description (English) CONNECTION DIAGRAM				DATAORIGINAL		
	Design checked by H.Sundberg		Drawn by A.Wang		Description (own language) KOPPLINGSSHEMA				File name		
Drawn by	Drawing checked by N.Gustavsson		Issued by Dept CO/TK		Year 14	Week 02	1ZSC004307-AAH				
											Lang
								1	-		