

SINGLE SOCKET OUTLETS FOR FLUSH MOUNTING

PEP Ecopassport

Product Environmental Profile



Product Environmental Profile - PEP Ecopassport.
Document in compliance with ISO 14025: 2006 "Environmental labels and declarations. Type III environmental declarations"

| | | | | | |
|---|----------------|----------------------------|------|-------|------|
| ORGANIZATION | | CONTACT INFORMATION | | | |
| ABB Wiring Accessories | | ella.helynranta@fi.abb.com | | | |
| ADDRESS | | WEBSITE | | | |
| Porvoon Sisäkehä 2, 06100 Porvoo, Finland | | www.abb.com | | | |
| STATUS | SECURITY LEVEL | REGISTRATION NUMBER | REV. | LANG. | PAGE |
| Approved | Public | ABBG-00535-V01.02-EN | 1 | en | 1/11 |



ABB Purpose & Embedding Sustainability

ABB is committed to continually promoting and embedding sustainability across its operations and value chain, aspiring to become a role model for others to follow. With its ABB Purpose, ABB is focusing on reducing harmful emissions, preserving natural resources and championing ethical and humane behavior.

Scan or click QR code for more information




General Information

| | |
|----------------------------|--|
| Reference product | 2TKA003848G1 - 20EUJ-84 |
| Description of the product | Flush mounted single socket outlet. There are terminals for each contact of the socket outlet. No 2 X-terminals. The terminals are for max 2 rigid wires. |
| Functional unit | Connect/disconnect the plug of a load consuming 16 AX maximum under a voltage of 250 V while protecting the user from direct contact with live parts, and for the reference service life of the product of 20 years. |
| Other products covered | The PEP covers other similar socket outlets from Jussi, Impressivo and Saga products ranges. The other products covered by the PEP are listed on page 9. |

| STATUS | SECURITY LEVEL | REGISTRATION NUMBER | REV. | LANG. | PAGE |
|----------|----------------|----------------------|------|-------|------|
| Approved | Public | ABBG-00535-V01.02-EN | 1 | en | 2/11 |



Constituent Materials

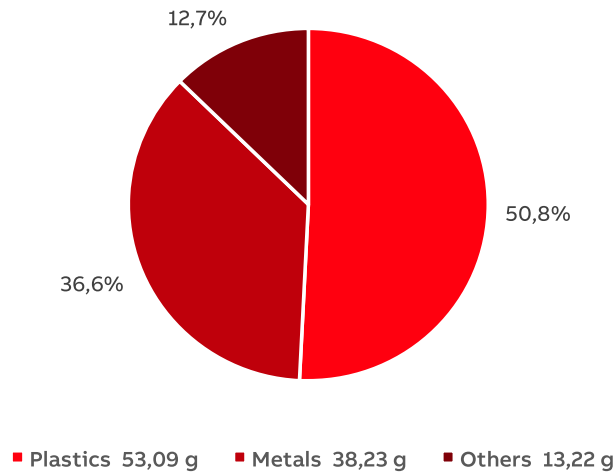

Total weight of Reference product

104,54

g

| Plastics as % of weight | | Metals as % of weight | | Others as % of weight | |
|-------------------------|---------|-----------------------|---------|-----------------------|---------|
| Name and CAS number | Weight% | Name and CAS number | Weight% | Name and CAS number | Weight% |
| Polycarbonate | 48,6 | Carbon steel | 17,6 | Carton | 12,7 |
| LDPE plastic bag | 1,4 | Brass | 15,4 | – | x |
| PBT | 0,8 | Stainless steel | 3,6 | – | x |

The product is manufactured from halogen free material (IEC/61249-2-21), the box complies with the IEC/EN60670:2005 glow wire test (850 °C). The recycled Polypropylene used in the product is 100% from post-consumer plastic waste, which is collected from Finnish households.

| STATUS | SECURITY LEVEL | REGISTRATION NUMBER | REV. | LANG. | PAGE |
|----------|----------------|----------------------|------|-------|------|
| Approved | Public | ABBG-00535-V01.02-EN | | 1 en | 3/11 |



Additional Environmental Information

| | |
|--|---|
| Manufacturing | Includes the environmental impacts associated with extraction and processing of the raw materials used to produce the product and its packaging, transport to the manufacturing site and assembly. The product is manufactured at an ISO 14000 certified plant. |
| Distribution | Includes the transportation of the packaged product from the manufacturer's last logistic platform to the distributor. |
| Installation | Includes the manual installation of the products and the end-of-life of packaging and the box lid. |
| Use | The product does not require special maintenance operations. |
| End of life | Includes the transportation of the product to the final end-of-life treatment site and treatment processes. |
| Benefits and loads beyond the system boundaries | Prevented impacts of recycling materials. |

| STATUS | SECURITY LEVEL | REGISTRATION NUMBER | REV. | LANG. | PAGE |
|----------|----------------|----------------------|------|-------|------|
| Approved | Public | ABBG-00535-V01.02-EN | 1 | en | 4/11 |



Environmental Impacts


| | |
|----------------------------------|--|
| Reference lifetime | 20 years |
| Product category | Power socket |
| Installation elements | No additional materials needed |
| Use scenario | Load rate: 10% of rated current Use rate: 30% of RTL |
| Geographical representativeness | Main market is the Finnish market, with some products going to Sweden and the rest of Europe |
| Technological representativeness | The manufacturing processes considered are representative of the products production |
| Software and database used | Software: SimaPro version 9.4.0.2 Database: ecoinvent 3.8 and Industry data 2.0 |

Energy model used

| | |
|---------------|---------|
| Manufacturing | Finland |
| Installation | Finland |
| Use | Finland |
| End of life | Finland |

| STATUS | SECURITY LEVEL | REGISTRATION NUMBER | REV. | LANG. | PAGE |
|----------|----------------|----------------------|------|-------|------|
| Approved | Public | ABBG-00535-V01.02-EN | 1 | en | 5/11 |

Common base of mandatory indicators

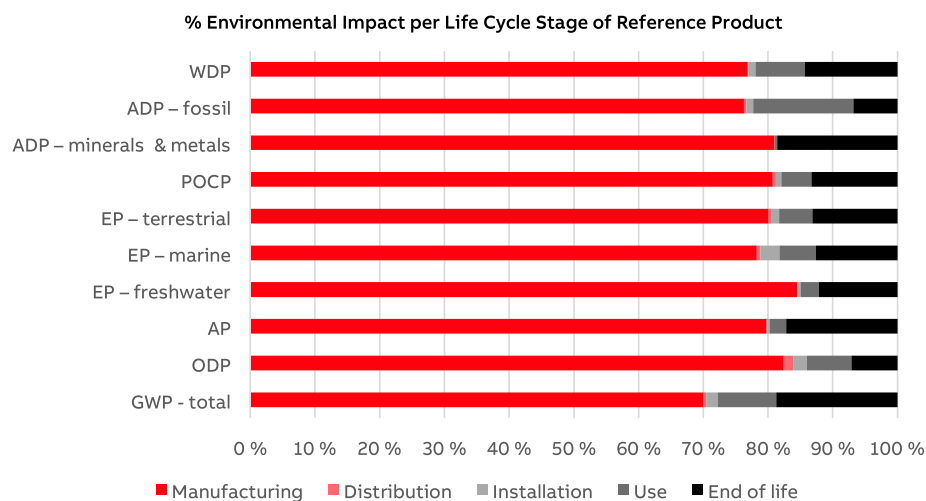

Environmental impact indicators

| Indicator | Unit | Total | Manu- facturing | Distri- bution | Installation | Use | End of life | Benefi- fits |
|---|--------------------------------|----------|--------------------|-------------------|--------------|----------|----------------|-----------------|
| GWP-total | kg CO₂ eq. | 6,98E-01 | 4,88E-01 | 3,27E-03 | 1,26E-02 | 6,28E-02 | 1,31E-01 | -1,65E-01 |
| GWP-fossil | kg CO₂ eq. | 6,92E-01 | 4,85E-01 | 3,26E-03 | 1,14E-02 | 6,15E-02 | 1,30E-01 | -1,66E-01 |
| GWP-biogenic | kg CO₂ eq. | 4,78E-03 | 2,33E-03 | 2,69E-06 | 1,18E-03 | 7,69E-04 | 4,96E-04 | 6,83E-04 |
| GWP-luluc | kg CO₂ eq. | 1,60E-03 | 8,67E-04 | 1,31E-06 | 5,68E-05 | 5,55E-04 | 1,15E-04 | -2,03E-04 |
| GWP-fossil = Global Warming Potential fossil fuels GWP-biogenic = Global Warming Potential biogenic GWP-luluc = Global Warming Potential land use and land use change | | | | | | | | |
| ODP | kg CFC-11 eq. | 5,02E-08 | 4,14E-08 | 3,26E-03 | 1,14E-02 | 6,15E-02 | 1,30E-01 | -1,66E-01 |
| ODP = Depletion potential of the stratospheric ozone layer | | | | | | | | |
| AP | H+ eq. | 1,04E-02 | 8,32E-03 | 1,60E-05 | 3,64E-05 | 2,69E-04 | 1,80E-03 | -5,59E-04 |
| AP = Acidification potential, Accumulated Exceedance | | | | | | | | |
| EP-freshwater | kg P eq. | 7,63E-04 | 6,44E-04 | 2,07E-07 | 3,99E-06 | 2,16E-05 | 9,26E-05 | -4,55E-05 |
| EP-marine | kg N eq. | 8,67E-04 | 6,78E-04 | 4,64E-06 | 2,61E-05 | 4,88E-05 | 1,09E-04 | -1,40E-04 |
| EP-terrestrial | mol N eq. | 9,91E-03 | 7,93E-03 | 5,08E-05 | 1,16E-04 | 5,10E-04 | 1,30E-03 | -1,34E-03 |
| EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment EP-terrestrial = Eutrophication potential, Accumulated Exceedance | | | | | | | | |
| POCP | kg NMVOC eq. | 2,91E-03 | 2,35E-03 | 1,52E-05 | 2,35E-05 | 1,36E-04 | 3,86E-04 | -5,30E-04 |
| POCP = Formation potential of tropospheric ozone | | | | | | | | |
| ADP-minerals & metals | kg Sb eq. | 2,18E-04 | 1,77E-04 | 1,11E-08 | 5,14E-08 | 7,74E-07 | 4,05E-05 | -1,14E-06 |
| ADP-fossil | MJ | 1,20E+01 | 9,17E+00 | 4,91E-02 | 1,24E-01 | 1,86E+00 | 8,22E-01 | -3,05E+00 |
| ADP-minerals & metals = Abiotic depletion potential for non-fossil resources ADP-fossil = Abiotic depletion for fossil resources potential | | | | | | | | |
| WDP | m³ eq. depr. | 2,80E-01 | 2,15E-01 | 1,46E-04 | 3,04E-03 | 2,14E-02 | 4,02E-02 | -5,05E-02 |
| WDP = Water Deprivation potential | | | | | | | | |

| STATUS | SECURITY LEVEL | REGISTRATION NUMBER | REV. | LANG. | PAGE |
|----------|----------------|----------------------|------|-------|------|
| Approved | Public | ABBG-00535-V01.02-EN | 1 | en | 6/11 |

Common base of mandatory indicators

Inventory flows indicator – Resource use indicators

| Indicator | Unit | Total | Manu- facturing | Distri- bution | Installation | Use | End of life | Bene- fits |
|-----------|------|----------|--------------------|-------------------|--------------|----------|----------------|---------------|
| PERE | MJ | 1,40E+00 | 7,54E-01 | 6,83E-04 | 1,99E-02 | 4,56E-01 | 1,68E-01 | -2,05E-01 |
| PERM | MJ | 1,70E-01 | 1,70E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| PERT | MJ | 1,57E+00 | 9,24E-01 | 6,83E-04 | 1,99E-02 | 4,56E-01 | 1,68E-01 | -2,05E-01 |
| PENRE | MJ | 1,04E+01 | 7,54E+00 | 4,91E-02 | 1,24E-01 | 1,83E+00 | 8,20E-01 | -3,04E+00 |
| PENRM | MJ | 1,62E+00 | 1,62E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| PENRT | MJ | 1,20E+01 | 9,16E+00 | 4,91E-02 | 1,24E-01 | 1,83E+00 | 8,20E-01 | -3,04E+00 |

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials

PERM = Use of renewable primary energy resources used as raw materials

PERT = Total Use of renewable primary energy resources

PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials

PENRM = Use of non-renewable primary energy resources used as raw materials

PENRT = Total Use of non-renewable primary energy resources

Inventory flows indicator – Indicators describing the use of secondary materials, water, and energy resources

| Indicator | Unit | Total | Manu- facturing | Distri- bution | Installation | Use | End of life | Bene- fits |
|-----------|----------------|----------|--------------------|-------------------|--------------|----------|----------------|---------------|
| SM | kg | 1,97E-02 | 1,97E-02 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| RSF | MJ | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| NRSF | MJ | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| FW | m ³ | 1,53E-02 | 1,29E-02 | 4,11E-06 | 7,91E-05 | 1,19E-03 | 1,06E-03 | -4,26E-03 |

SM = Use of secondary material

RSF = Use of renewable secondary fuels

NRSF = Use of non-renewable secondary fuels

FW = Use of net fresh water

Inventory flows indicator – Waste category indicators

| Indicator | Unit | Total | Manu- facturing | Distri- bution | Installation | Use | End of life | Bene- fits |
|-------------------------------|------|----------|--------------------|-------------------|--------------|----------|----------------|---------------|
| Hazardous waste disposed | kg | 5,48E-05 | 5,30E-05 | 1,26E-07 | 1,81E-07 | 7,78E-07 | 7,37E-07 | -5,24E-06 |
| Non- hazardous waste disposed | kg | 1,55E-01 | 1,52E-01 | 1,66E-04 | 1,28E-04 | 3,80E-04 | 2,74E-03 | -5,60E-02 |
| Radioactive waste disposed | kg | 1,20E-04 | 9,48E-05 | 3,32E-07 | 3,15E-07 | 1,95E-05 | 4,80E-06 | -3,33E-05 |

| STATUS | SECURITY LEVEL | REGISTRATION NUMBER | REV. | LANG. | PAGE |
|----------|----------------|----------------------|------|-------|------|
| Approved | Public | ABBG-00535-V01.02-EN | 1 | en | 7/11 |

Common base of mandatory indicators

Inventory flows indicator – Output flow indicators

| Indicator | Unit | Total | Manu- facturing | Distri- bution | Installation | Use | End of life | Bene- fits |
|-------------------------------|------|----------|--------------------|-------------------|--------------|----------|----------------|---------------|
| Components for re-use | kg | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Materials for recycling | kg | 7,11E-02 | 0,00E+00 | 0,00E+00 | 1,35E-02 | 0,00E+00 | 5,76E-02 | 0,00E+00 |
| Materials for energy recovery | kg | 3,37E-02 | 6,92E-04 | 0,00E+00 | 1,13E-03 | 0,00E+00 | 3,19E-02 | 0,00E+00 |
| Exported energy | MJ | 2,54E-02 | 2,54E-02 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |

Inventory flow indicator – other indicators

| Indicator | Unit | Total | Manu- facturing | Distri- bution | Installation | Use | End of life | Bene- fits |
|---|---------|----------|--------------------|-------------------|--------------|----------|----------------|---------------|
| Biogenic carbon content of the product | kg of C | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| Biogenic carbon content of the associated packaging | kg of C | 5,95E-03 | 5,95E-03 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |

| STATUS | SECURITY LEVEL | REGISTRATION NUMBER | REV. | LANG. | PAGE |
|----------|----------------|----------------------|------|-------|------|
| Approved | Public | ABBG-00535-V01.02-EN | 1 | en | 8/11 |

Extrapolation Factors

For other products than the Reference product covered by this PEP, the environmental impacts for each phase of the lifecycle are obtained by multiplying the values of the Reference product by the following coefficients:

* if the coefficient is "1", the impacts of the phase of the life cycle are assimilated to the Reference product, meaning that the impacts are unchanged in comparison to the Reference product

| Product name | Manu- facturing | Distri- bution | Installation | Use | End of life | Benefits |
|-----------------|--------------------|-------------------|--------------|------|-------------|----------|
| 2TKA00001360 | 0,89 | 0,89 | 1,30 | 1,00 | 0,82 | 0,89 |
| 2TKA00000434 | 0,76 | 0,76 | 0,72 | 1,00 | 0,76 | 0,76 |
| 2TKA00000437 | 0,90 | 0,90 | 0,72 | 1,00 | 0,92 | 0,90 |
| 2TKA00000439 | 1,00 | 1,00 | 1,00 | 1,00 | 1,00 | 1,00 |
| 2TKA00001358 | 0,79 | 0,79 | 1,30 | 1,00 | 0,70 | 0,79 |
| 2TKA00000435 | 0,76 | 0,76 | 0,72 | 1,00 | 0,76 | 0,76 |
| 2TKA00000436 | 0,90 | 0,90 | 0,72 | 1,00 | 0,92 | 0,90 |
| 2TKA00000438 | 1,00 | 1,00 | 1,00 | 1,00 | 1,00 | 1,00 |
| 2TKA00004104 | 0,90 | 0,90 | 0,72 | 1,00 | 0,92 | 0,90 |
| 2TKA00004464 | 1,18 | 1,18 | 1,00 | 1,00 | 1,21 | 1,18 |
| 2TKA000747G1 | 0,73 | 0,73 | 0,76 | 1,00 | 0,72 | 0,73 |
| 2TKA000684G1 | 0,71 | 0,71 | 0,76 | 1,00 | 0,70 | 0,71 |
| 2TKA000692G1 | 0,86 | 0,86 | 1,11 | 1,00 | 0,82 | 0,86 |
| 2TKA000698G1 | 1,18 | 1,18 | 1,00 | 1,00 | 1,21 | 1,18 |
| 2TKA003846G1 | 0,76 | 0,76 | 0,72 | 1,00 | 0,76 | 0,76 |
| 2TKA003847G1 | 0,90 | 0,90 | 0,72 | 1,00 | 0,92 | 0,90 |
| 2TKA00000073 | 1,18 | 1,18 | 1,00 | 1,00 | 1,21 | 1,18 |
| 2TKA00002538 | 0,90 | 0,90 | 0,72 | 1,00 | 0,92 | 0,90 |
| 2TKA000680G1 | 0,87 | 0,87 | 0,76 | 1,00 | 0,89 | 0,87 |
| 2TKA000690G1 | 0,92 | 0,92 | 1,11 | 1,00 | 0,89 | 0,92 |
| 2TKA00005353 | 0,73 | 0,73 | 0,76 | 1,00 | 0,72 | 0,73 |
| 2TKA00005354 | 0,93 | 0,93 | 1,07 | 1,00 | 0,91 | 0,93 |
| 2TKA00005355 | 1,07 | 1,07 | 1,00 | 1,00 | 1,09 | 1,07 |
| 2CKA002013A5328 | 0,80 | 0,80 | 0,72 | 1,00 | 0,82 | 0,80 |
| 2CKA002013A5276 | 1,01 | 1,01 | 0,72 | 1,00 | 1,06 | 1,01 |
| 2CKA002013A5333 | 0,80 | 0,80 | 0,72 | 1,00 | 0,82 | 0,80 |
| 2TKA00005915 | 0,76 | 0,76 | 1,11 | 0,55 | 0,71 | 0,76 |
| 2TKA00005916 | 1,08 | 1,08 | 1,11 | 0,55 | 1,07 | 1,08 |

| STATUS | SECURITY LEVEL | REGISTRATION NUMBER | REV. | LANG. | PAGE |
|----------|----------------|----------------------|------|-------|------|
| Approved | Public | ABBG-00535-V01.02-EN | | 1 en | 9/11 |

Environmental Impact Indicator Glossary


Impact indicators

| Indicator | Description | Distribution |
|---|---|--------------------------------------|
| Global warming potential (GWP) - total | Indicator of potential global warming caused by emissions to air contributing to the greenhouse effect. The total global warming potential (GWP-total) is the sum of three sub-categories of climate change. GWP-total = GWP-fossil + GWP-biogenic + GWP- land use and land use change | kg CO ₂ eq. |
| Ozone depletion (ODP) | Emissions to air that contribute to the destruction of the stratospheric ozone layer | kg CFC-11 eq. |
| Acidification of soil and water (A) | Acidification of soils and water caused by the release of certain gases to the atmosphere, such as nitrogen oxides and sulphur oxides | H+ eq. |
| Eutrophication (E) | Indicator of the contribution to eutrophication of water by the enrichment of the aquatic ecosystem with nutritional elements, e.g. industrial or domestic effluents, agriculture, etc. This indicator is divided to three: freshwater, marine and terrestrial. | kg P eq., kg N eq., mole N eq. |
| Photochemical ozone creation (POCP) | Indicator of emissions of gases that affect the creation of photochemical ozone in the lower atmosphere (smog) because of the rays of the sun. | kg NMVOC eq. |
| Depletion of abiotic resources – elements (ADPe) | Indicator of the depletion of natural non-fossil resources | kg Sb eq. |
| Depletion of abiotic resources – fossil fuels (ADP _f) | The use of non-renewable fossil resources in an unsustainable way (e.g. from material to waste) | MJ (lower heating value) |
| Water Deprivation potential (WDP) | Deprivation-weighted water consumption. Assesses the potential of water deprivation, to either humans or ecosystems, building on the assumption that the less water remaining available per area, the more likely another user will be deprived. | m ³ eq. depr. |

Resource use indicators

| Indicator | Description | Distribution |
|-----------------------------|--|--------------------------|
| Total use of primary energy | Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) + Total use of renewable primary energy re-sources (primary energy and primary energy resources used as raw materials) | MJ (lower heating value) |

| STATUS | SECURITY LEVEL | REGISTRATION NUMBER | REV. | LANG. | PAGE |
|----------|----------------|----------------------|------|-------|-------|
| Approved | Public | ABBG-00535-V01.02-EN | 1 | en | 10/11 |

| | |
|--|---|
| Registration number: ABBG-00535-V01.02-EN | Drafting Rules: PCR-ed4-EN-2021 09 06 |
| | Supplemented by: PSR-0005-ed3-EN-2023 06 06 |
| Verifier accreditation number: VH08 | Information and reference documents: www.pep-ecopassport.org |
| Date of issue: 02-2024 | Validity period: 5 years |
| Independent verification of the declaration and data, in compliance with ISO 14025: 2006 | |
| Internal: <input type="radio"/> | External: <input checked="" type="radio"/> |
| Document in compliance with ISO 14025: 2006 "Environmental labels and declarations. Type III environmental declarations" |  |
| PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019 The elements of the present PEP cannot be compared with elements from any other program. | |
| Document in compliance with ISO 14025: 2006 "Environmental labels and declarations. Type III environmental declarations" | |

| STATUS | SECURITY LEVEL | REGISTRATION NUMBER | REV. | LANG. | PAGE |
|----------|----------------|----------------------|------|-------|-------|
| Approved | Public | ABBG-00535-V01.02-EN | 1 | en | 11/11 |