


On-load tap-changer type UCGR./III, VUCGR./III, UCLR./III, VUCLR./III, UCDR./III, 13 tap positions, plus/minus switching.  
 Max. effective No. of turns in pos. 1.  
 The tap-changer is delivered set in pos. 7, the preceding pos. was 6.

Lindningskopplare typ UCGR./III, VUCGR./III, UCLR./III, VUCLR./III, UCDR./III, 13 lägen, plus/minus koppling.  
 Max antal effektiva varv i läge 1.  
 Lindningskopplaren levereras inställd i läge 7, föregående läge var 6.

Pos. Läge	R connects in direction R förbinder i riktning		Tap selector and diverter switch connect Väljaren och lastkopplaren förbinder
1	↓	↑	1-H-v
2			2-V-x
3			3-H-v
4			4-V-x
5			5-H-v
6			6-V-x
7	↓	↑	7-H-v
8	↓	↑	8-V-x
9			9-H-v
10			10-V-x
11			11-H-v
12			12-V-x
13			13-H-v

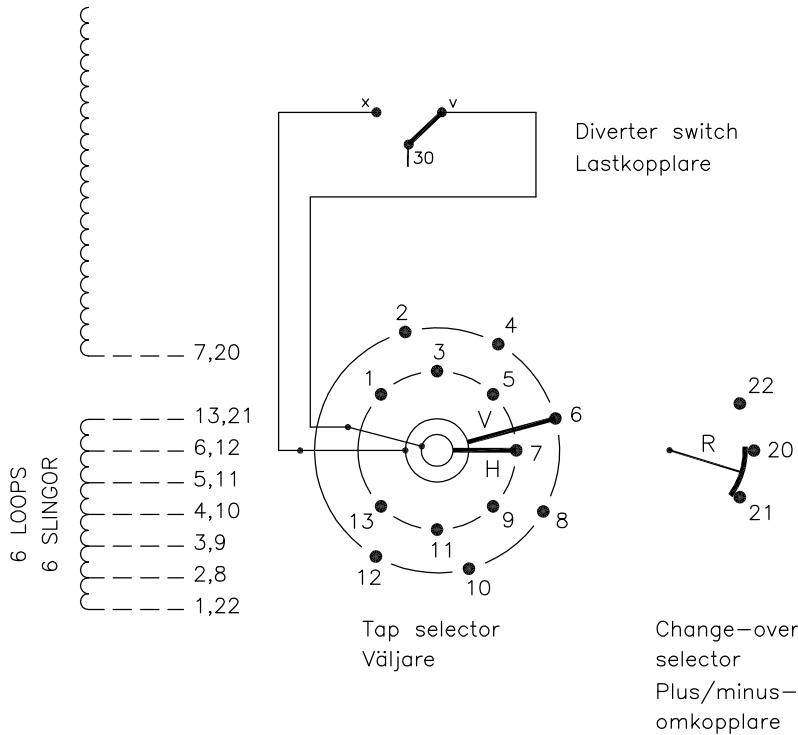

The tap-changer is shown in pos. 7, the preceding pos. was 6.  
 The tap selector and the change-over selector are seen from above.  
 Contact arm V is located above contact arm H.

Lindningskopplaren visad i läge 7, föregående läge var 6.  
 Väljaren och plus/minus-omkopplaren sedda uppifrån.  
 Kontaktarm V ligger över kontaktarm H.

Continuous lines show leads included in the tap-changer. Dashed lines show leads belonging to the cleats and leads.

Heldragna linjer visar ledare som ingår i lindningskopplaren. Streckade linjer visar ledare som tillhör anslutningsdonet.

2	VUCLR Added	CA	12	37
1	VUCG Added	CE	07	47
Rev Ind	Revision	Appd	Year	Week

Accepted by qual control R.Yngvesson	Accepted for prod by	Description (English) CONNECTION DIAGRAM	DATAORIGINAL
Design checked by B-O.Stenestam	Drawn by L.Bergman	Description (own language) KOPPLINGSSHEMA	File name 0368-3
Drawing checked by M.Hedlund	Issued by Dept Year Week COM/TKO 97 16	5492 0368-3	Lang Sheet 1
Asea Brown Boveri			Revind Cont -

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © ABB '19

Sheet	Cont
Year	Week
Dept	
Revind	
Form No.	
Design checked by	