



MULTIPLE OF LONG-TIME PICKUP

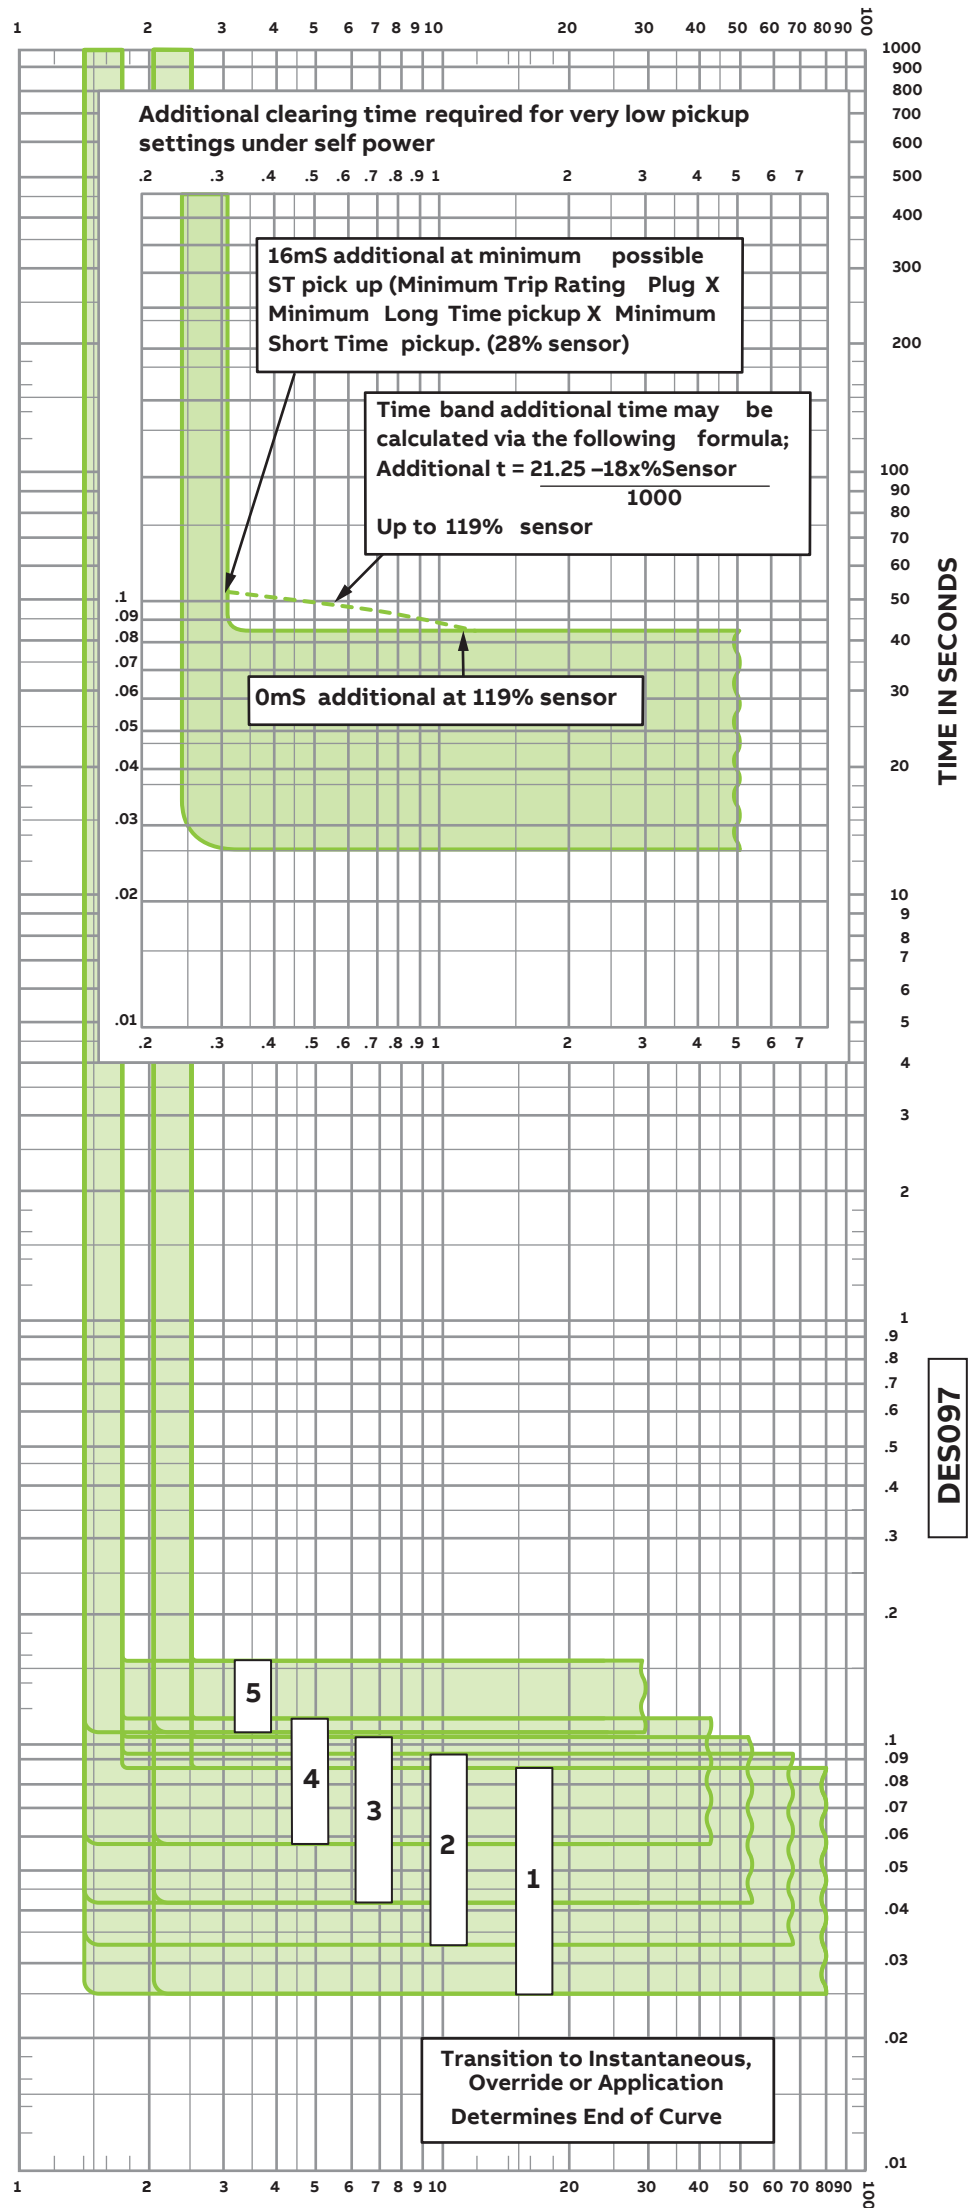

MULTIPLE OF LONG-TIME PICKUP

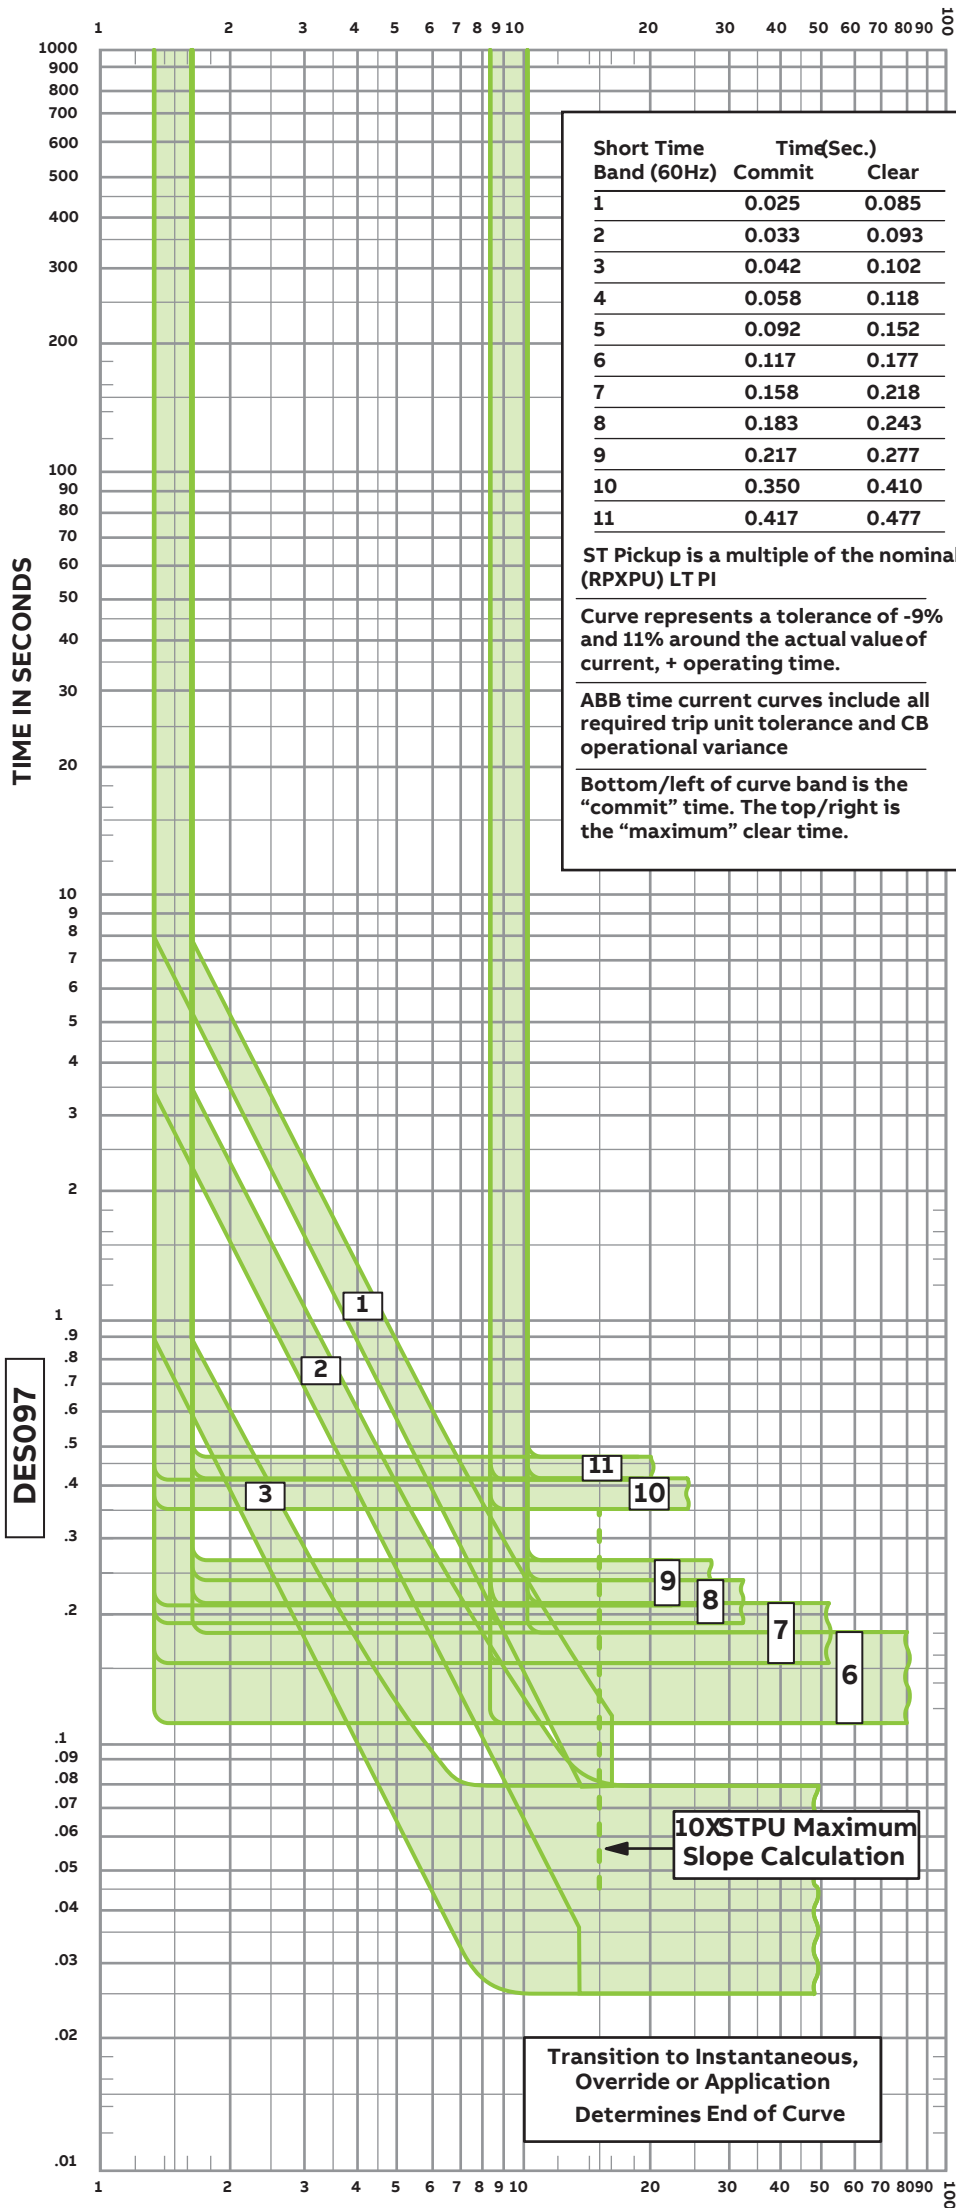

Frames 800-5000A AKR & WavePro
PowerBreak &
PowerBreak II

Frames 800-4000A PowerBreak II

Trip Unit Conversion kits

800-5000A

All Voltages: 600 Vac and below

Low-Voltage Circuit Breakers

EntelliGuard TU Trip Unit for PowerBreak, PowerBreak II, AKR & Wavepro Circuit Breakers
UL489 and UL1066 Stored Energy Mechanism Circuit Breakers
ANSI Trip Conversion Kits
Short-Time Pickup and Delay Bands

Curves apply at 60 Hertz and from -20°C to 55°C circuit breaker ambient temperature.

DES097

Pickup Range

1.5X - 9X nominal Long Time Pickup, up to and including the 4000A frame 1.5X - 7X nominal Long Time Pickup, 5000A AKR and WavePro