


MULTIPLES OF CURRENT RATING (In)

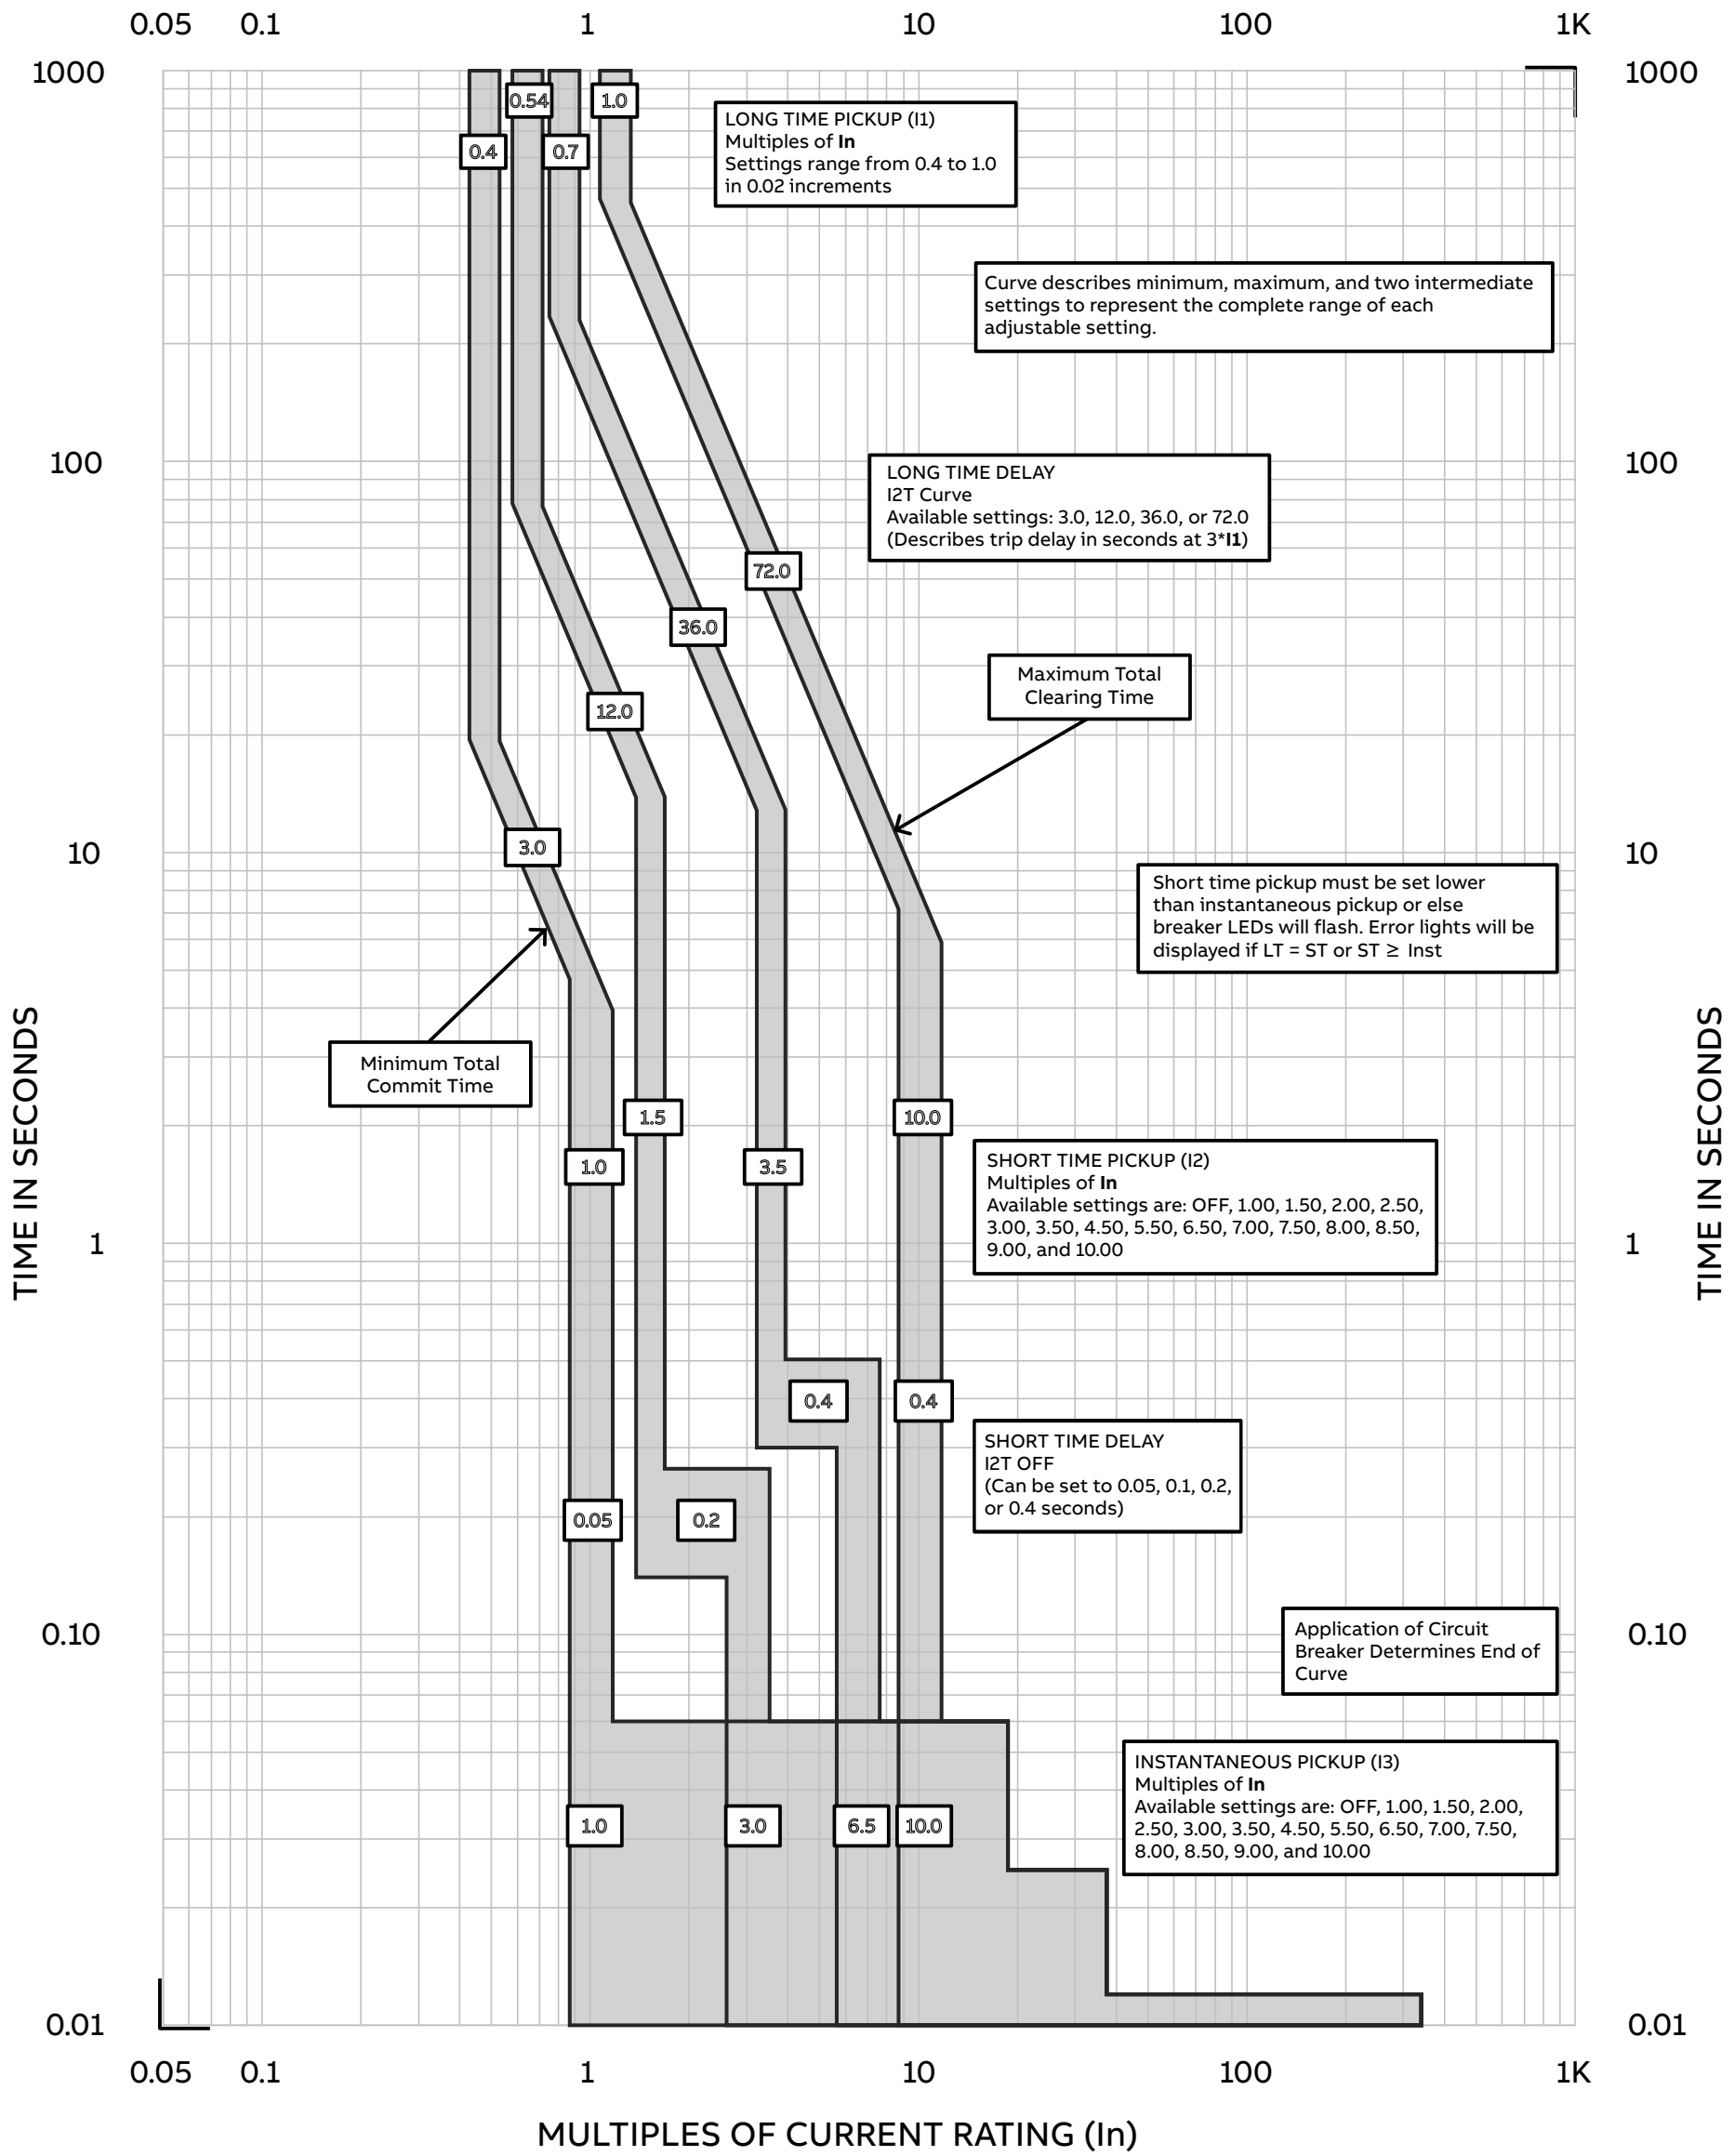

**Time Current Curve**

Available Ratings (Amperes)

| Type | Model | Trip Unit | Frame Amps | Current Rating (In) |
|------|-------|-----------|------------|---------------------|
| MCCB | XT6   | Ekip DIP  | 800        | 600 800             |

Voltage Rating: 600Vac, 50 to 60 hz systems

electrification.us.abb.com

**Molded Case Circuit Breaker**

Type Tmax XT6 with Ekip DIP LSI/LSIG Trip Unit  
Short time I2T OFF

**Operating Conditions:** Curve represents trip with no prior load. Curves apply at 50 to 60 Hertz with reference ambient temperature of 40°C at 2000m altitude with three phase fault applied. Refer to technical guide from the UL catalog for more information regarding thermal application.

**Instantaneous Override:** When instantaneous protection is turned off, the breaker will immediately trip for any current that is equal to or greater than **10,000A** +/- 10%.

**Ground Fault:** Refer to TCC 9AKK108468A0683 for ground fault curve