

CATALOG

ABB Ability™ System 800xA® 6.2

Product Catalog



Table of contents

008	ABB Ability™ System 800xA® Extended Automation
010	System 800xA, System Capabilities
012	System 800xA Software and License
013	Automation Software Maintenance Program
014	Control System Lifecycle Management Program and System identifier
015–036	System 800xA 6.2
015	System 800xA Base System
016	Tag Addition
016	Subscriber System Tags
016	Connectivity
017	System Extensions
018	Cyber Security
018	Modular Automation
019	Control Room Solutions
020	Operator Workplaces
020	Extended Operations
021	Public Addressing

021	Live Video System
022	Batch Management, Batch Analytics
023	Standard Engineering Tools
023	Professional Engineering Tools
024	Information Management, Smart Client
024	Information Management, System 800xA History
024	System 800xA History Signals - Logs
024	Process Recall
025	Control Software Licenses
026	Communication Interface Software Licenses
027	Safety
027	Asset Optimization
028	Asset Monitors
028	Device Management & Fieldbuses
030	Libraries
030	Process Industries Application Libraries
030	PIAL Media
031	Process Control Device Library
031	Process Industries Application Libraries
031	Additional Control Device Library Licenses
031	PCDL Application Engineering
032	Process Control Equipment Library
032	Process Control Equipment Library Licenses
032	Additional Control Equipment Library Licenses

033	PCEL Application Engineering
033	ProBase
034	Localization
035–041	Panel 800 version 6.2
036	Specifications Panel 800 version 6.2
037	Lifecycle Management Program
038	Panel Builder 800
038	Operator Panels
040	Dongles
040	Accessories
042–059	AC 800M Processor Units
043	AC 800M Controllers selection guide
047	Hardware Upgrade orders
047	System Units
048	AC 800M Processor Units
050	AC 800M High Integrity Units
051	Extra Batteries
052	Control Network
052	Serial Interfaces on TP830
053	AC 800M Controller and Communication Interface selection guide
055	Serial Communication Interface
055	MODBUS TCP
055	PROFIBUS DP

055	PROFINET IO
056	FOUNDATION Fieldbus
056	IEC 61850
056	Ethernet/IP
057	OPC UA
057	Advant Fieldbus 100, MasterBus 300
057	S100 I/O Bus
058	Satt I/O
058	INSUM
058	DriveBus
059	Bus Accessories
059	AC 800M Mounting Rails

060–065 Select I/O

061	Select I/O Selection guide
061	Extended warranty for Select I/O Hardware
062	ISA-S71.04 level G3 compliance
062	Field Communication Interface
062	I/O Modules
063	High Integrity I/O Modules
064	Module Termination Units
065	ModuleBus Communication Parts
065	Empty Slot Protectors
065	Power Supplies and Voters

066–089 S800 I/O Modules

068	S800 I/O and S800L I/O Modules
070	S800 I/O, S800L I/O modules selection guide
071	S800 I/O Communication interfaces
074	Extended warranty for S800 I/O Hardware
075	ISA-S71.04 level G3 Compliance
075	Field Communication Interface
076	Upgrade Kit and Tool Cables
077	S800 I/O Modules
080	S800 I/O Pulse Counting Modules
081	Label sets for S800 I/O Modules
081	S800 High Integrity I/O Modules
082	S800 Module Termination Units
084	S800L I/O Modules
084	Label sets for S800L I/O Modules
085	S800 and S800L ModuleBus Communication Parts
087	Power supplies and voters selection guide
089	AC 800M and S800 I/O Power Supplies


090–098 S900 Remote I/O System

091	Ex zone 1 system components
092	Ex zone 2 system components
094	Safe area system components
096	Accessories

097	Field Housing S900-FH660S
097	Field Housing S900-FH680S
098	FOUNDATION Fieldbus Network Components
098	PROFIBUS Network Components
099	System 800xA – Media, Library and Dongles
100–101	Base Systems
100	Engineering Systems
101	Engineering Systems options
101	Temporary Engineering Workplace 6.2
102	System 800xA 6.2 – Field-Kit System
103–108	System 800xA Networks
104	System 800xA Networks selection guide
106	Network switches
106	Network routers/firewalls
107	Network accessories
107	Modular Transceivers (SFPs)
108	Specifications Optical Transceivers
109	Extended Warranty Time
109	S800 I/O, S900 I/O, Fieldbus and AC 800M controllers
110	References and System 800xA Hardware Selector

ABB Ability™ System 800xA®

Extended Automation

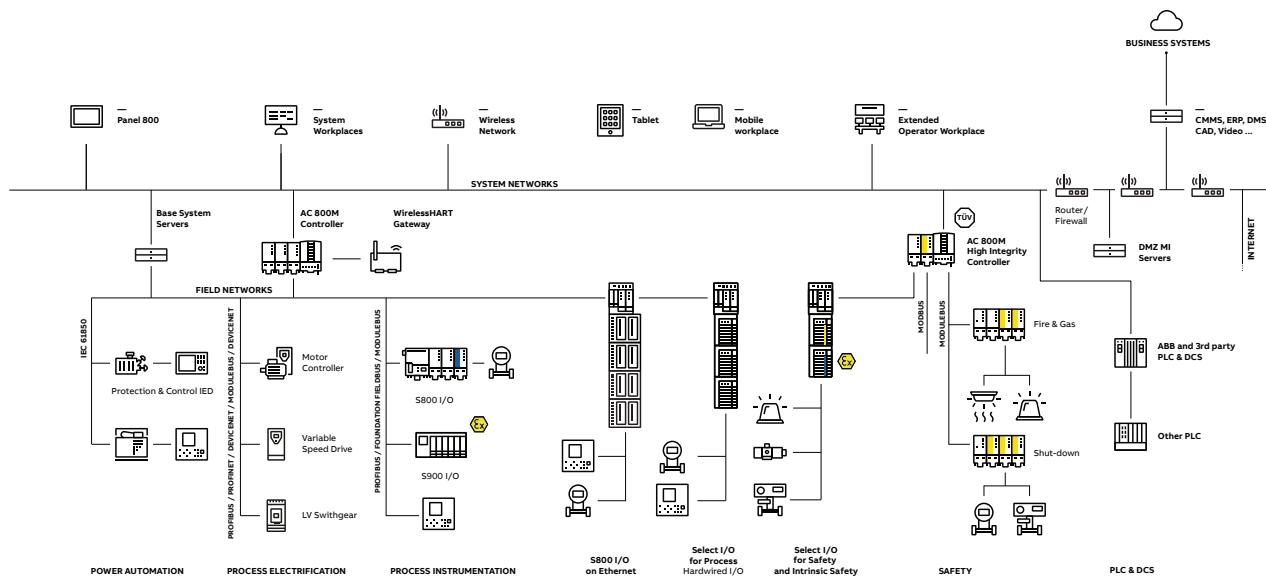

System 800xA® is not only a DCS (Distributed Control System) it's also an Electrical Control System, a Safety System and a collaboration enabler with the capacity to improve engineering efficiency, operator performance and asset utilization.

Promoting collaboration

Collaboration between people and systems is a necessity to increase engineering efficiency, asset utilization, energy savings, and operator effectiveness. System 800xA's 'xA' stands for Extended Automation and utilizes the system architecture which was built for collaboration.

System 800xA® is the only automation platform that has the ability to engineer, commission, control, and operate automation strategies for process, power, electrical and safety in the same, redundant, reliable system.

Also, facilitating collaboration is System 800xA's pre-integrated applications such as a full featured historian, asset optimization, batch management and much more.



System 800xA®

ABB's award winning System 800xA provides you with a better way to achieve measurable productivity and profitability improvements. System 800xA extends the scope of traditional DCS systems to include all automation functions in a single operations and engineering environment; enabling your plants to perform smarter and better at substantial cost savings.

Embracing the principles of open, real-time networking, System 800xA provides a scalable solution that spans and integrates loop, unit, area, plant, and inter plant controls.

From providing a secure foundation with robust, but flexible, base level regulatory and sequence control to higher level management and advanced control functions that include safety controls, batch management, maintenance management, information management, and network management solutions, System 800xA meets the application needs of a wide variety of industries.

System 800xA provides you with a secure, reliable control environment with minimum effort through built-in security features such as access control, user authentication, and audit trail capability. ABB enhances secure system operations by actively participating on security standards committees, conducting threat-modeling studies, and incorporating "safe design" practices into product development.

Based upon the Aspect Object technology and a common set of hardware, System 800xA seamlessly integrates traditionally isolated DCS and Safety systems. SIS realization is achieved by either utilizing individual controllers or through dedicated applications within the same controller.

With this embedded control and safety architecture, System 800xA reduces costs significantly; achieving the objectives of both systems – maximum plant availability at minimum risk.

For more information about System 800xA® please visit our web: **solutions.abb/800xa**

System 800xA

System Capabilities

System 800xA from ABB is a control system that enables plant wide collaboration between people, systems and equipment. System 800xA utilizes a system architecture built for collaboration in a fully redundant, reliable environment.

Removing the barriers in traditional distributed control systems, System 800xA provides a collaboration environment that is required to increase productivity while reducing risk and total cost of ownership.

System 800xA Capabilities	
Tags	120,000
Total number of Clients, normal or remote (nodes with one or several workplaces)	80
I/O channels	From a hundred to over 1,000 per controller depending on CPU type and application.
Operator screens per system	160
Operator screens per Operator Workplace	4
Operator Workplaces, normal or remote	80
Engineering Workplaces	20
Remote Engineering Workplaces	5
Information Management Workplaces	80
Desktop Displays for trends and events	150
Batch Workplaces	40
Nodes in one control network segment (excl. domain server and controllers)	100
Aspect Services redundancy	1 (single, redundant 1oo2 or 2oo3)
AC 800M Connectivity services	8 (16 if redundant)
AC 800M controllers per connectivity services	48 (Application Dependent)

System 800xA Capabilities	
PROFIBUS & HART Connectivity services	8 (16 if redundant), 2,500 devices per server
Foundation Fieldbus Connectivity services	8 (16 if redundant), 1,000 devices per server
PLC Connect services	12 (24 if redundant), 50,000 signals per server
IEC 61850 Connectivity services	8 (16 if redundant), 80 IEDs per server
Asset Optimization services	4
Multisystem Integration Subscribers	2
Multisystem Integration Providers	20
Nodes with server functions	25 (50 if redundant)
Application servers	10
Batch servers	1 (single or redundant 1oo2)
800xA History servers	1 (2 if redundant)
Supported Fieldbuses	Foundation Fieldbus, PROFIBUS, PROFINET, HART, OPC UA
Electrical Integration	IEC 61850
Standard Serial Protocols	RS232C: MODBUS RTU/TCP, 3964R, Comli
External application communication	OPC, OPC UA, OLE-DB, ODBC
Network	Ethernet TCP/IP Redundant
Network device supervision	SNMP
Operating System	Server: Windows Server 2022/2019 Standard/Datacenter (64 bit US English Version) Client: Windows 10 2021/2019 LTSC IoT/Enterprise (64 bit US English Version)

Performance and capacity	
Graphical displays	Unlimited (depending on available Hard disk space)
Display exchange time	Standard Main Faceplate: ≤1 second. Graphic display with 100 objects: ≤1 seconds
Command response time (order to indication)	<2 seconds
Reports	Unlimited
Alarm and event lists	100
X-Y plots	Unlimited
Active Batch Phases	300
Asset Monitors	20,000
History Logs per system (Information Manager)	180,000
History Log disc space per value (Information Manager)	21 bytes
Stored OPC Messages (Information Manager)	12,000,000
History Logs per server (800xA History)	180,000
History Log disc space requirements (800xA History)	40 bytes
Stored OPC Messages (800xA History)	Time/Disc space limited
Event burst capacity	1000 alarms/second for 3 seconds plus 10/s for 15 minutes
Event storage disc space requirements	Storage per message: 6k bytes
Alarm/Event throughput/sec	30
OPC DA throughput (items per sec) per AC 800M Connectivity server	30,000
Max number of softpoint signals	25,000
Max number of soft events	10 /second
Scheduling Service capacity	Max. 200 simultaneous jobs per scheduling server
Calculation Services	10
Calculations/second	100
Write transactions/second	The Calculation server can write up to 10 values/second to process (AC 800M) objects
Calculations that may be queued waiting to be executed	1,000 calculations per Calculation server

This table is an extract and may be changed without further notice. Note that a combination of functions may impact the total capacity, and that conditions may apply for certain parameters. For explanations and further details, refer to the System 800xA® System Guide Technical Data and Configuration document.

System 800xA Software

The system installation is supported by the Automated Installation program. The Automated Installation program is a shell framework to ease the installation and configuration of your 800xA System.

Installation is never prevented due to lack of licensing, but licenses are required to unlock features for operating or engineering the system. Updates and security related software from non-ABB companies must be downloaded and installed separately, as guided from the Automated Installation program.

The Automated Installation program is supplied on the 800xA media box. The common part is to specify the system details of your system in the Automated Installation program System Planner and generate a unique setup package for each node (workstation) describing what should be installed from the 800xA media box, or a file server, onto each node, and how it should be configured.

The System 800xA Installer is installed on each node, and then the following steps are executed to install and configure your node:

- Windows configuration
- System Verifier tool
- System installation
- System configuration

The setup-files may also reside on the file server. Windows configuration configures the environment (IP address, hostname, Windows components, and Windows services) connect to the workgroup or domain. The System Verifier tool checks for the necessary 3rd party software and where installations are required.

License

The central licensing system (CLS) is local to each system. Each system is ordered separately, and a separate license file is fetched for each system from the Software Factory. This also means that each system is managed individually updates and upgrades, as well as initial system installation.

The software or hardware described in the document is furnished under a license and may be used, copied, or disclosed only in accordance with the terms of such license.



Automation Software Maintenance Program

Automation Software Maintenance Program

Automation Software Maintenance is the control system life-cycle support program and is aimed at providing services for the maintenance, continuous enhancement and evolution of the ABB installed base of control systems.

Each and every control system under Automation Software Maintenance can make use, depending on the active subscription mode, of the following main program deliverables listed below.

Software Updates and upgrades

Automation Software Maintenance users have the exclusive right to receive control system software updates and upgrades:

- An Automation Software Maintenance agreement, at the appropriate agreement mode, provides access to software patches, technical corrections, roll-ups, service packs, firmware updates, feature packs, software updates, upgrades and software for control system evolution purposes.
- The Automation Software Maintenance user, at the appropriate agreement level, is entitled to newer licensed software versions of the installed control systems products as they are released. This right gives the user access to software upgrades and enhancements for System 800xA.

Cyber and IT security reports and updates

Automation Software Maintenance users have the exclusive right to access IT security validation reports, ABB reviews, tests and validates on a regular basis Microsoft security updates and 3rd party virus scanner software for compatibility with the 800xA control system.

Automation Software Maintenance users will have access to all available cyber and IT security reports and updates for application as needed in order to ensure that the running control systems are better protected against any security risks which are encountered more often now than ever before.

Each and every control system must be under Automation Software Maintenance before making use of the published IT security validation reports.

Expert product technical support

Automation Software Maintenance users have access to ABB expert and R&D support organizations. This support is being provided for troubleshooting of product defects and issues they encounter during the validity of the subscription.

Read more about our Automation Software Maintenance Program here:


<https://new.abb.com/control-systems/service/offerings/service-agreements>



Control System Lifecycle Management Program and System identifier



Control System Lifecycle Management Program

Control System Lifecycle Management Program	
	Automation Software Maintenance is the ABB control system lifecycle management program for the Extended Automation, Freelance, Compact Product Suite, Symphony Plus and OCS product lines. ABB recommends its customers to use Automation Software Maintenance for all its installed control systems. With this program, customers can keep control software up-to-date and maintain a flexible path forward to new system software technology. It provides services to maintain and continually advance and enhance your ABB control system installation. You may choose the level of maintenance and upgrade support that works best for your immediate needs and long-term production targets. Read more about our Automation Software Maintenance Program and its many valuable services here: new.abb.com/control-systems/service/offerings/service-agreements Please contact your local sales representative for detailed information on the program and on how to order Automation Software Maintenance subscriptions.



System Identifier

800xA System Identifier	Article no.
800xA System Identifier 6.2 System identifier, used as identifier for each individual 800xA system. The ID must be used when ordering hardware and software to a system. After ordering this item a system license in design phase can be downloaded from SOFA.	7PAA007748R1

System 800xA 6.2

Base System

System 800xA Base System

The base system is used as the base for 800xA production system, mulitsystem integration subscriber system and as Read only system.

Tags can be added to all these systems.

Only one type of subscriber tags (ie. subscriber tags or read only subscriber tags) can be added to a subscriber system.

A subscriber system can not be converted from read only to read and write and vice versa.

800xA Base System 6.2	Article no.
800xA Base System 6.2 Includes one Operator Workplace, one Engineering Workplace, AC 800M Connectivity, Redundant Aspect Server, Plant Explorer, Logging of Operator actions, Topology Status Viewer, Softpoint Server, Scheduler, 10 Asset Monitors, Primary History Logs (logging of signals for Operator trends).	7PAA007580R1

800xA Production License 6.2	Article no.
800xA Production Licence 6.2 Ordered to be able to download a production license to switch the system from Engineering Phase to Production Phase.	7PAA007581R1

Base System

Tag Addition

Tags	Article no.
One process object with faceplate for operator interactions counts as a tag. (Total max 120,000. Can not be mixed with redundant tags)	
100 tags, non-redundant 6.2	7PAA007582R1
1,000 tags, non-redundant 6.2	7PAA007583R1
10,000 tags, non-redundant 6.2	7PAA007584R1
Systems with > 60.000 tags require a Temporary Sales Authorization (TSA)	

Redundant Tags	Article no.
One process object with faceplate for operator interactions count as a tag. Enables tag access through redundant Connectivity Servers. (Total max 120,000. Can not be mixed with non-redundant tags)	
100 tags, redundant 6.2	7PAA007585R1
1,000 tags, redundant 6.2	7PAA007586R1
10,000 tags, redundant 6.2	7PAA007587R1
Systems with > 60.000 tags require a Temporary Sales Authorization (TSA)	

Base System

Subscriber System Tags

Subscriber System Tags

Tags in the subscriber system in a Multisystem Integration configuration. These tags are Object with a faceplate that collects data from a provider system. Subscriber tags are only required in the subscriber system.

Subscriber tag is required for every provider tag that needs to be accessed from graphics, alarms, trends etc, in a subscriber system.

Note that non-redundant Multisystem Subscriber Tags can not be mixed with Multisystem Subscriber Redundant Tags. Note that Multisystem Subscriber Tags can not be mixed with Multisystem Read Only Subscriber Tags.

Multisystem Subscriber Tags	Article no.
Tags in the subscriber system in a Multisystem Integration configuration. Systems with > 60.000 tags require a Temporary Sales Authorization (TSA).	
100 Multisystem Subscriber Tags 6.2	7PAA007588R1
1,000 Multisystem Subscriber Tags 6.2	7PAA007589R1
10,000 Multisystem Subscriber Tags 6.2	7PAA007590R1

Multisystem Subscriber Redundant Tags	Article no.
Tags in the subscriber system in a Multisystem Integration configuration. Enables tag access through redundant Connectivity Servers. Systems with > 60.000 tags require a Temporary Sales Authorization (TSA).	
100 Multisystem Subscriber Redundant Tags 6.2	7PAA007591R1
1,000 Multisystem Subscriber Redundant Tags 6.2	7PAA007592R1
10,000 Multisystem Subscriber Redundant Tags 6.2	7PAA007593R1

800xA Applications

Connectivity

Connectivity	Article no.
Note that there may be 800xA price list options that are not supported with a particular OCS controller. Please refer to the table "Available functions per Controller Connectivity" in the System Guide "Technical Data and Configuration Information". To check what connectivity combinations that are valid, use the Project Wizard or refer to the System 800xA System Guide for information.	
PLC Connect 6.2 Faceplates, graphical elements and means to communicate with PLC-systems (one license per system).	7PAA007594R1
AC500 Connect 6.2 License for integration of AC 500 PLC with DCS/HMI system via PLC Connect. One license per DCS/HMI system. Additional licenses needed for AC500 Libraries and AC500 OPC server.	7PAA007799R1
PLC Connect Dial-Up 6.2 Scaled on number of dial up lines in a system.	7PAA007595R1
OPC UA Connect 6.2 This enables 800xA to connect to third party OPC UA servers via the 800xA OPC Client, includes OPC UA DA. One per system.	7PAA007819R1
800xA for Advant Master 6.2 Faceplates, graphical elements and means to communicate with the system (one license per system). 800xA for Advant Master hardware (PU410) needs to be ordered separately. Please refer to price book Advant OCS with Master Software.	7PAA007596R1

800xA Applications

Connectivity

Connectivity	Article no.
Advant Master Central Backup 6.2 Backup and restore of applications for Advant Master controllers (AC410, AC450, MP200/1, SG400) One license per system. Requires 800xA for Advant Master.	7PAA007597R1
800xA for Harmony 6.2 Faceplates, graphical elements and means to communicate with the system (one licence per system). 800xA for Harmony hardware need to be ordered separately.	7PAA007598R1
800xA for AC 870P/Melody 6.2 Graphical elements and means to communicate with the system (faceplates not included) (one licence per system).	7PAA007599R1
800xA for MOD 300 6.2 Faceplates, graphical elements and means to communicate with the system (one license per system). 800xA for MOD 300 hardware (PU410/PU412) needs to be ordered separately. Please refer to price book Advant OCS with MOD 300 Software.	7PAA007600R1
800xA for Safeguard 6.2 Faceplates, graphical elements and means to communicate with the system. Note: Requires also 800xA for Advant Master.	7PAA007602R1
800xA for AC 100 6.2 Faceplates, graphical elements and means to communicate with the AC 100 Controller, OPC server included. AC 100 OPC Server Hardware needs to be ordered separately. Please refer to pricebook 3BSE001706, Advant OCS with Master Software.	7PAA007603R1

800xA Applications

System Extensions

System Extensions	Article no.
Point of Control 6.2 Collaboration based transfer of plant operation responsibility between locations and users.	7PAA007604R1
800xA OPC Client Connection 6.2 This enables third party OPC clients to connect to 800xA via the 800xA. OPC server, includes OPC DA, AE & HDA. One per external access.	7PAA007605R1
800xA OPC UA Client Connection 6.2 This enables third party OPC UA clients to connect to 800xA via the 800xA OPC server, includes OPC UA, DA, AE & HDA. One per external access.	7PAA007804R1
OLE-DB Real Time Data Client Connection 6.2 Allows realtime system data to be accessed via an OLE-DB interface. One per external access.	7PAA007606R1
SMS and e-mail Messaging 6.2 Sending messages based on alarm and event information to user devices such as mobile telephones, e-mail accounts and pagers.	7PAA007607R1
Calculation Engine 6.2 Provides the ability to run mathematical calculations on any available System 800xA aspect property or attribute. One license per server or redundant server pair.	7PAA007608R1
Snapshot Reports 6.2 Makes it possible to create aspects that automatically executes a query and produces a report consisting of properties of objects in the system.	7PAA007609R1
CAD Viewer license 6.2 View CAD drawings in DXF and DWG formats stored in aspects. DWG (version 13, 14, 2000, 2004, 2007, 2010) and DXF (version 12, 13, 14, 2000, 2004, 2007, 2010).	7PAA007610R1

800xA Applications

Cyber Security

Cyber Security	Article no.
Digital Signature 6.2 Makes it possible to digitally sign aspects to ensure that data is kept unchanged after approval.	7PAA007611R1
Advanced Access Control 6.2 Reauthentication, double reauthentication and inactivity logout.	7PAA007612R1
Audit Trail 6.2 Logging of all user initiated actions in a system. e.g. graphics editing, control logic editing, batch recipe editing and start/stop of servers etc.	7PAA007613R1
800xA Event Forwarder 6.2 The Windows event log updated with 800xA events so that e.g. a security information and event management (SIEM) system can be updated with this information. No SEIM HW or SW is included (one per system).	7PAA007614R1

800xA Applications

Modular Automation

Modular Automation	Article no.
Orchestration Designer, 800xA 6.2 License for Orchestration Designer for System 800xA.	7PAA007808R1
Orchestration Connect, 800xA 6.2 License for enabling connect of Modules (MTP) to Orchestration Layer via OPC UA. Includes license for 3 Modules.	7PAA007809R1
Additional Module, 800xA 6.2 One license per additional Module (MTP) connected to the Orchestration Layer. Requires license for Orchestration Connect.	7PAA007810R1

Operations

Control Room Solutions

Control room operators make hundreds of decisions every working day – decisions that have a great impact on productivity, quality, and safety. What's more, the more alert, stimulated and harmonious they are, the better the decisions they make. For plant and control room managers, the key question is thus how to create and maintain operator well-being at levels that ensure their very best performance.

An operator environment designed with human factors in focus can convert potentially dangerous fatigue and distraction into proactive alertness that extracts the very best from every individual – in both routine operations and critical situations. Operator well-being is a key success factor for safe, productive and reliable operations.

24/7 control room solutions designed for the long-run and built to last

Equipment such as Control room equipment, chairs, desks, sound absorbers, cap desks, operator desks and other adjacent accessories. The equipment is marketed along an extensive know-ledge about control room design and human factors. Collaboration is a key word and is used from a workflow perspective, analyzing operations in normal and critical situations and how collaboration is enhanced through design are interesting values for the end user operations. The equipment itself might not be the main competitive advantage, but in combination with their know-how this offering is highly interested to almost any projects.

By involving ABB in a control room pre-study, you get the unique possibility to create a control room environment that perfectly suits your needs and individual situation of operations. The pre-study focuses on human factors interacting

with 800xA and uses high standard control room equipment in a very cost efficient way.

Operator information overviews are built to match the physical dimensions and personal preferences of each individual. With motorized sit/stand desk-height, screen adjustment options, light and sound settings, each environment represents the ultimate in form and function. Designed to keep operators alert even during calm or monotonous periods, the desks and auxiliary products are bio-mechanically optimized, appealing to use and built to last.

The main purpose of this Product guide is to give a good overview and understanding of products specified to be used with 800xA. The offering includes other desk series and adjacent equipment suitable for 24/7 environments. To fully comply with project specification, we are able to customize desk to meet the desired requirements. Please contact ABB Control Room Solutions for support.

The Control Room Solution offering is being expanded due to our acquisition of CGM, a company that specializes in control room design and products.

Some products will remain visible in the Wizard for configuration purposes. During a transition period we kindly request you to use e-mail for orders and requests. The offering is available as hardware only, in a separate price book named Control room solutions.

Please send all questions related to control room solutions to SE-cgm-info@abb.com.



Operations

Operator Workplaces

Operator Workplaces	Article no.
Operator Workplace – Additional Client 6.2 Includes one local or remote Operator Workplace. Use of up to 2 screens is included. Maximum screen resolution of 1920 x 1200. The total quantity of Operator Workplaces, Large Operator Workplaces and Engineering Workplaces – must not exceed 80. Licence is needed for each concurrent user.	7PAA007615R1
Large Operator Workplace Client 6.2 Includes one local or remote Operator Workplace, with the possibility to use 3 or 4 screens, or a total desktop resolution higher than 1920 x 1200. The total quantity of Operator Workplaces, Large Operator Workplaces and Engineering Workplaces must not exceed 80. Licence is needed for each concurrent user.	7PAA007616R1

HTML 5 Workplaces	Article no.
Operations Client 6.2 Includes one HTML 5 based Operations Client. The total quantity of Operations Clients must not exceed 100. License is needed for each concurrent user.	7PAA007952R1
Alarm Client 6.2 Includes one HTML5 based Alarm Client. The total quantity of Alarm Clients must not exceed 100. License is needed for each concurrent user.	7PAA007953R1

Operations

Extended Operations

Alarm Operations	Article no.
Alarm Operations, < 2000 Tags 6.2 Alarm Grouping, Alarm Shelving and Basic Alarm Analysis. Alarm Help aspects. (Alarm Hiding and Alarm Response are part of the base system)	7PAA007617R1
Alarm Operations, < 5000 Tags 6.2 Alarm Grouping, Alarm Shelving and Basic Alarm Analysis. Alarm Help aspects. (Alarm Hiding and Alarm Response are part of the base system)	7PAA007618R1
Alarm Operations, >= 5000 Tags 6.2 Alarm Grouping, Alarm Shelving and Basic Alarm Analysis. Alarm Help aspects. (Alarm Hiding and Alarm Response are part of the base system)	7PAA007619R1

Alarm History and Reports	Article no.
Alarm History and Reports, < 2000 Tags 6.2 Long term alarm storage and analyze, alarm system KPI reports, web and e-mail distribution of reports.	7PAA007620R1
Alarm History and Reports, < 5000 Tags 6.2 Long term alarm storage and analyze, alarm system KPI reports, web and e-mail distribution of reports.	7PAA007621R1
Alarm History and Reports, >= 5000 Tags 6.2 Long term alarm storage and analyze, alarm system KPI reports, web and e-mail distribution of reports.	7PAA007622R1
Symbol Factory for Process Graphics 2 6.2 Support for Symbol Factory graphics items in graphics displays.	7PAA007623R1

Operations

Public Addressing

Public Addressing	Article no.
Public Addressing output channel 6.2 One output channel with one language. The channel can convert alarms in alarmlists and predefined text messages to sound. The sound content can be configured differently for each output channel.	7PAA007624R1
Public Addressing additional language 6.2 One additional language for all channels.	7PAA007625R1

Operations

Live Video System

Live Video System	Article no.
Video Input Channel 1-10 6.2 Includes one software license needed to receive an IP addressed video stream to the video server. Article used to buy stream 1-10	7PAA007626R1
Video Input Channel 11-25 6.2 Includes one software license needed to receive an IP addressed video stream to the video server. Article used to buy stream 11-25	7PAA007627R1
Video Input Channel 26-50 6.2 Includes one software license needed to receive an IP addressed video stream to the video server. Article used to buy stream 26-50	7PAA007628R1
Video Input Channel 51-500 6.2 Includes one software license needed to receive an IP addressed video stream to the video server. Article used to buy stream 51-500	7PAA007629R1
Video View Client 6.2 One concurrent client for viewing recorded or live video streams. Each client must have compatible video codec software installed.	7PAA007630R1

Production Management

Batch Management

Batch Management	Article no.
Batch Base System 6.2 Provides the basic server functionality for Batch Management. The Batch Server includes 10 Batch Equipment. 1 Batch Client included.	7PAA007631R1
10 Additional Batch Equipment 6.2 The number of batch equipment instances includes each piece of equipment configured in Batch Management including both Units and Shared Equipment Modules.	7PAA007632R1
100 Additional Batch Equipment 6.1.1 The number of batch equipment instances includes each piece of equipment configured in Batch Management including both Units and Shared Equipment Modules.	7PAA007633R1
Batch Management Full Client 6.2 This Client feature provides access to Batch Management functions. The Client feature is based upon concurrent users, not physical workstation installation. Including SQL server licenses.	7PAA007634R1
Redundant Batch Server Option 6.2 Provides redundancy for the basic server functionality for Batch Management. Requires Batch Base System	7PAA007635R1
Batch Advanced Phase Templates 6.2 This feature provides access to the Batch Advanced templates control modules for phases, units and shared equipment modules. For use with AC 800M controllers. Batch Phase Control library option, includes 2000 Advanced Phases. Also includes Batch Unit Diagrams.	7PAA007636R1
Batch Schedule Interface 6.2 Webservice interface to batch scheduling and equipment status. This feature is used to interface Batch Management to external applications such as schedulers and ERP systems.	7PAA007637R1

Production Management

Batch Analytics

Batch Management	Article no.
PR Batch History – Base 6.2 Includes Production Data Storage, 1 PR Batch View Client, and Report Data Access via native SQL drivers. 800xA History needs to be ordered or part of the system in order to be used.	7PAA007806R1
PR Batch View – Additional Clients 6.2 Provides additional Batch view client access. To be used when users want to use PR Batch View feature in multiple locations. Includes Data viewer, PFC viewer, and History Trend viewer. This should never exceed system clients.	7PAA007807R1

Engineering

Standard Engineering Tools

Standard Engineering Tools	Article no.
Engineering Workplace – Additional Client 6.2 Includes Control Configuration for AC 800M, Bulk Data Handling, Graphic Configuration, Document Manager, Parameter Manager, I/O allocation function and Script Manager Professional (one client is included with the Base system). The total quantity of Operator Workplaces - Additional and Remote Clients, Large Operator Workplaces and Engineering Workplaces - must not exceed 80. NOTE: Calling up operator displays i.e. graphics, trends, alarm lists, in Engineering Workplace, will absorb operator workplace licences.	7PAA007638R1
Engineering Workplace – Application Change Management 6.2 Includes one Engineering Workplace and license for Application Change Management (ACM). The total quantity of Operator Workplaces - Additional and Remote Clients, Large Operator Workplaces and Engineering Workplaces - must not exceed 80. NOTE: Calling up operator displays i.e. graphics, trends, alarm lists, in Engineering Workplace, will absorb operator workplace licences.	7PAA007639R1
Engineering Workplace – LEG 6.2 Includes one Engineering Workplace and license for Load Evaluate Go (LEG). The total quantity of Operator Workplaces - Additional and Remote Clients, Large Operator Workplaces and Engineering Workplaces - must not exceed 80. For Systems with > 60.000 tags this function require a Temporary Sales Authorization (TSA). NOTE: Calling up operator displays i.e. graphics, trends, alarm lists, in Engineering Workplace, will absorb operator workplace licences.	7PAA007640R1
SoftController 6.2 To be used with the programming tool Control Builder M. This product is to be used as a test tool only. One licence is required per SoftController.	7PAA007641R1

Engineering

Professional Engineering Tools

Professional Engineering Tools	Article no.
Aspect Studio and Aspect Express are not available in the price list. Please, contact your BU Area Sales Manager for quotation.	
Reuse Assistant 6.2 Wizard help for selection of reusable solutions.	7PAA007642R1

Information Management

Smart Client Workplaces	Article no.
License for one smart client workplace for access to system information from the office network.	
Includes: View Process Graphics 2 displays, Trend displays, Build/view business graphics, historic data, alarm & events analyze (H & AE analyze requires IM or 800xA History)	
Software media can be downloaded from ABB Library or MyABB/MyControlSystem.	
Smart Client Workplace – Client 1-10 6.2	7PAA007643R1
Smart Client Workplace – Client 11-50 6.2	7PAA007644R1
Smart Client Workplace – Client 51-100 6.2	7PAA007645R1

Information Management

System 800xA History

800xA History Signals – Logs	Article no.
History signals capable of storing actual and historic values retrieved from 800xA, Heritage ABB DCS systems and OPC sources. Each signal include logging, trending, calculations, and archiving. A signal is any numeric (Boolean, Integer or Real) data stored in the 800xA History Server.	
800xA History signals – 100 logs 6.2	7PAA007646R1
800xA History signals – 1 000 logs 6.2	7PAA007647R1
800xA History Signals – 15 000 logs 6.2	7PAA007648R1
800xA Dual History Signals – Logs	Article no.
History signals for parallel logging in two history servers. Each signal includes logging, trending, calculations and archiving for parallel logging in two history servers.	
A signal is any numeric (Boolean, Integer or Real) data stored in the 800xA History Server. The number of dual history signals should match the number of history signals that should be logged in two servers.	
800xA History signals – 100 logs 6.2	7PAA007649R1
800xA History signals – 1 000 logs 6.2	7PAA007650R1
800xA History Signals – 15 000 logs 6.2	7PAA007651R1
Data access to 800xA History Signals	Article no.
External access to History data via OPC and ODBC connectivity. Access to both the current and the historical data from 800xA History.	
(Same size as total number of 800xA History Signals).	
800xA History signals – 100 logs 6.2	7PAA007652R1
800xA History signals – 1 000 logs 6.2	7PAA007653R1
800xA History Signals – 15 000 logs 6.2	7PAA007654R1

Process Recall

Workplace 6.2, additional tags and client 6.2

Process Recall	Article no.
Process Recall, Workplace 6.2	7PAA008016R1
Process Recall Workplace includes 2000 tags. User needs to buy additional tags when the overall number of tags in the system surpasses 2000 tags.	
Process Recall, 1000 Additional Tags 6.2	7PAA008017R1
License for up to 1000 additional tags that have data being saved in the Process Recall Server.	
Process Recall, Add. Client 6.2	7PAA008018R1
Includes one additional Workplace. User needs to buy additional tags when the overall number of tags in the system surpasses 2000 tags.	

Control- and Communication Interface Software Licenses

Control Software Licenses

Historian Data Access Options	Article no.
PM851 SW License 800xA 6.2 PM851K01/PM851AK01 Processor Unit License only.	7PAA007671R1
PM856 SW License 800xA 6.2 PM856K01/PM856AK01 Processor Unit License only.	7PAA007672R1
PM857 SW License 800xA 6.2 PM857K01 Processor Unit License only.	7PAA007672R1
PM857 Red. SW License 800xA 6.2 PM857K02 Redundant Processor Unit License only.	7PAA007673R1
PM858 SW License 800xA 6.2 PM858K01 Processor Unit License only.	7PAA007673R1
PM858 Red. SW License 800xA 6.2 PM858K02 Redundant Processor Unit License only.	7PAA007674R1
PM860 SW License 800xA 6.2 PM860K01/PM860AK01 Processor Unit License only.	7PAA007675R1
PM862 SW License 800xA 6.2 PM862K01 Processor Unit License only.	7PAA007678R1
PM862 Red. SW License 800xA 6.1.1 PM862K02 Redundant Processor Unit License only.	7PAA007679R1
PM863 SW License 800xA 6.1.1 PM863K01 Processor Unit License only.	7PAA007760R1
PM863 Red. SW License 800xA 6.1.1 PM863K02 Redundant Processor Unit License only.	7PAA007761R1
PM866 SW license 800xA 6.1.1 PM866K01/PM866AK01 Processor Unit License only.	7PAA007684R1
PM866 Red. SW License 800xA 6.1.1 PM866K02/PM866AK02 Redundant Processor Unit License only.	7PAA007685R1
PM867 SW License 800xA 6.1.1 PM867K01 Processor Unit License only.	7PAA007686R1
PM867 Red. SW License 800xA 6.1.1 PM867K02 Redundant Processor Unit License only.	7PAA007687R1
PM891 SW License 800xA 6.1.1 PM891K01 Processor Unit License only.	7PAA007688R1
PM891 Red. SW License 800xA 6.1.1 PM891K02 Redundant Processor Unit License only.	7PAA007689R1
SM812 Safety CPU SW license 800xA 6.1.1 SM812K01 Safety CPU module kit License only.	7PAA007691R1

Control- and Communication Interface Software Licenses

Communication Interface Software Licenses

Communication Interface Software Licenses	Article no.
CI853 RS232/RS485 SW License 800xA 6.2 CI853K01 Dual RS232-C Communication Interface License only.	7PAA007692R1
CI854 PROFIBUS SW License 800xA 6.2 CI854K01/CI854AK01/CI854BK01 PROFIBUS DP-V1 Communication Interface License only.	7PAA007693R1
CI855 MB 300 SW License 800xA 6.2 CI855K01 MB 300 Dual Ethernet port interface License only.	7PAA007694R1
CI856 S100 I/O SW License 800xA 6.2 CI856K01 S100 I/O Communication Interface License only.	7PAA007695R1
CI857 INSUM SW License 800xA 6.2 CI857K01 INSUM Ethernet Communication Interface License only.	7PAA007696R1
CI858 DriveBus SW License 800xA 6.2 CI858K01 DriveBus Communication Interface License only.	7PAA007697R1
CI860 FF HSE SW License 800xA 6.2 CI860K01 FOUNDATION Fieldbus HSE Communication Interface License only.	7PAA007698R1
CI865 Satt I/O SW License 800xA 6.2 CI865K01 Satt I/O Communication Interface License only.	7PAA007701R1
CI867 Modbus TCP SW License 800xA 6.2 CI867K01 Modbus TCP Communication Interface License only.	7PAA007702R1
CI868 IEC 61850 SW License 800xA 6.2 CI868K01 IEC 61850 Communication Interface License only.	7PAA007703R1
CI869 AF 100 SW License 800xA 6.2 CI869K01 AF 100 Communication Interface License only.	7PAA007704R1
CI871 PROFINET IO SW License 800xA 6.2 CI871K01 PROFINET IO Communication Interface License only.	7PAA007705R1
CI873 Ethernet/IP SW License 800xA 6.1.1 CI873K01 Ethernet/IP Communication Interface License only.	7PAA007706R1
CI874 OPC UA Client SW Lic 800xA 6.1.1 CI874 OPC UA Client Communication Interface. License only.	7PAA007805R1

System 800xA 6.2

Safety

Enabler for combined PA Control and Certified Safety software	Article no.
AC 800M HI and Process license 6.2 One fixed license feature per AC 800M controller running both non-SIL and SIL applications in the same controller.	7PAA007707R1

System 800xA 6.2

Asset Optimization

Asset Optimization	Article no.
100 Asset Monitors 6.2 Asset monitoring and Basic Asset Monitor Library. Each Aspect Object being monitored by one or more asset monitors counts as one.	7PAA007708R1
1000 Asset Monitors 6.2 Asset monitoring and Basic Asset Monitor Library. Each Aspect Object being monitored by one or more asset monitors counts as one.	7PAA007709R1
800xA Maximo Integration 6.2 Enables integration into Maximo for work order management. Application Engineering available through Consult IT.	7PAA007710R1
800xA SAP/Plant Maintenance Integration 6.2 Enables integration into SAP for work order management. Application Engineering available through Consult IT.	7PAA007711R1

Asset Optimization

Asset Monitors

Asset Monitors	Article no.
Generic Heat Exchanger Asset Monitor 6.2 It monitors the performance against standard operating parameters independent of type of heat exchanger.	7PAA007712R1
Shell/Tube Heat Exchanger Asset Monitor 6.2 It monitors the performance against standard operating parameters based on the size of shell and tube heat exchanger.	7PAA007713R1
Advanced Harmony System Monitoring 6.2 Enables Harmony Control Network monitors for diagnostic monitoring, reporting, and analysis	7PAA007714R1
100 Control Loop Asset Monitors 6.2 Each Control Loop Asset Monitor monitors and assesses the performance of a control loop in real-time and report significant problems related to the control loop and final control element. (Quantity of CLAM must not exceed 500)	7PAA007715R1
300 Control Loop Asset Monitors 6.2 Each Control Loop Asset Monitor monitors and assesses the performance of a control loop in real-time and report significant problems related to the control loop and final control element. (Quantity of CLAM must not exceed 500)	7PAA007716R1
500 Control Loop Asset Monitors 6.2 Each Control Loop Asset Monitor monitors and assesses the performance of a control loop in real-time and report significant problems related to the control loop and final control element. (Quantity of CLAM must not exceed 500)	7PAA007717R1
PNSM, < 2000 Tags 6.2 PC, Network and Software Monitoring (PNSM) enables availability monitoring of IT assets, like servers and workstations, network and software components. This option is for systems with less than 2000 Tags.	7PAA007749R1
PNSM, < 5000 Tags 6.2 PC, Network and Software Monitoring (PNSM) enables availability monitoring of IT assets, like servers and workstations, network and software components. This option is for systems with 2000 Tags or more, but with less than 5000 Tags.	7PAA007750R1
PNSM, >= 5000 Tags 6.2 PC, Network and Software Monitoring (PNSM) enables availability monitoring of IT assets, like servers and workstations, network and software components. This option is for systems with 5000 Tags or more.	7PAA007751R1

System 800xA 6.2

Device Management & Fieldbuses

Device Management HART	Article no.
For HART devices to be accessed using HART Device Type Manager (DTM's) within System 800xA. Includes HART Device Library with generic and specific HART Device Aspect Objects incl. DTM's, I/O DTM for S800 and S900, HART Instruments Asset Monitor Library and OPC Server. Each HART device aspect object accessed with DTM counts as one. (Max 1 000 per Connectivity Server when OPC Communication is used.	
100 HART Device Aspect Objects 6.2	7PAA007718R1
1 000 HART Device Aspect Objects 6.2	7PAA007719R1
10 000 HART Device Aspect Objects 6.2	7PAA007720R1
HART Multiplexer Connect 6.2 Enables HART Device Integration to connect to HART devices via HART Multiplexers.	7PAA007721R1

800xA 6.2 System

Device Management & Fieldbuses

Device Management FOUNDATION Fieldbus	Article no.
For FOUNDATION Fieldbus (FF) devices to be accessed using Fieldbus Builder FF within System 800xA. Includes FF Device Library with FF Device Aspect Objects, FF Instruments Asset Monitor Library and OPC Server. Each FF device aspect object counts as one. (Max 1 000 per Connectivity Server.)	
100 FF Device Aspect Objects 6.2	7PAA007722R1
1 000 FF Device Aspect Objects 6.2	7PAA007723R1
10 000 FF Device Aspect Objects 6.2	7PAA007724R1
Device Management PROFIBUS	Article no.
For PROFIBUS DP/PA devices to be accessed using Device Type Manager (DTM's) within System 800xA. Includes PROFIBUS Device Library with specific PROFIBUS Device Aspect Objects incl. DTM's, I/O DTM for S800 and S900, and PROFIBUS Instruments Asset Monitor Library. Each PROFIBUS device aspect object accessed with DTM counts as one. (Max 2 500 per Connectivity Server if OPC communication is used.)	
100 PROFIBUS Device Aspect Objects 6.2	7PAA007725R1
1 000 PROFIBUS Device Aspect Objects 6.2	7PAA007726R1
10 000 PROFIBUS Device Aspect Objects 6.2	7PAA007727R1
Device Management Drives	Article no.
10 Drive Aspect Objects 6.2 Provide integrated access to Drive Manager for 10 drives via DTMs. This allows a centralized method to maintain and parameterize all the drives in a plant. Allows for connectivity via Profibus and Profinet. The Drive Manager needs to be obtained separately.	
	7PAA007802R1
100 Drive Aspect Objects 6.2 Provide integrated access to Drive Manager for 100 drives via DTMs. This allows a centralized method to maintain and parameterize all the drives in a plant. Allows for connectivity via Profibus and Profinet. The Drive Manager needs to be obtained separately.	
	7PAA007803R1
IEC 61850 Connect	Article no.
For operation clients to access data and alarm and event values from Intelligent Electronic Devices (IEDs) according to IEC 61850 within System 800xA. For Redundant IEC 61850 Connect servers, it is only necessary to purchase the "IEC 61850 Redundant Devices" licenses, according to the number of devices connected to the System.	
IEC 61850 Non-Redundant	
10 IEC 61850 Devices Non-Redundant 6.2 Allows operation clients to access data and alarm and event values from Intelligent Electronic Devices (IEDs) according to IEC 61850, through Non-Redundant IEC 61850 Connect server. Each IED instance created in System 800xA counts as one.	
	7PAA007752R1
100 IEC 61850 Devices Non-Redundant 6.2 Allows operation clients to access data and alarm and event values from Intelligent Electronic Devices (IEDs) according to IEC 61850, through Non-Redundant IEC 61850 Connect server. Each IED instance created in System 800xA counts as one.	
	7PAA007753R1
IEC 61850 Redundant	Article no.
10 IEC 61850 Devices Redundant 6.2 Allows operation clients to access data and alarm and event values from Intelligent Electronic Devices (IEDs) according to IEC 61850, through Redundant IEC 61850 Connect server. Each IED instance created in System 800xA counts as one.	
	7PAA007754R1
100 IEC 61850 Devices Redundant 6.2 Allows operation clients to access data and alarm and event values from Intelligent Electronic Devices (IEDs) according to IEC 61850, through Redundant IEC 61850 Connect server. Each IED instance created in System 800xA counts as one.	
	7PAA007755R1

System 800xA 6.2

Libraries

Libraries	Article no.
INFI90 Function Code Library, AC 800M 6.2 Control functions, faceplates and graphics elements that makes it easier to create functionality that has earlier been configured in an INFI90 system. Media is downloaded separately.	7PAA007728R1
MOD 300 CCF Library, AC 800M 6.2 Control functions, faceplates and graphics elements that makes it easier to create functionality that has earlier been configured in a MOD300 system. Media is downloaded separately.	7PAA007729R1
TCP Communication Library License 6.2 Control functions to create TCP based communication protocols in the AC800M controller. One license is needed for each controller using the library.	7PAA007730R1
UDP Communication Library License 6.2 Control functions to create UDP based communication protocols in the AC 800M controller. One license is needed for each controller using the library.	7PAA007731R1
PM857 Burner Management Library License 6.2 Control functions for burner management applications. One license is needed for each PM857 using the library.	7PAA007765R1
PM863 Burner Management Library License 6.2 Control functions for burner management applications. One license is needed for each PM863 using the library.	7PAA007764R1
PM867 Burner Management Library License 6.2 Control functions for burner management applications. One license is needed for each PM867 using the library.	7PAA007733R1
PM857 Safe Ethernet Library License 6.2 Control functions for Safe Ethernet communication for 3 rd party PROFISafe devices. One license is needed for each PM857 using the library.	7PAA007949R1
PM863 Safe Ethernet Library License 6.2 Control functions for Safe Ethernet communication for 3 rd party PROFISafe devices. One license is needed for each PM863 using the library.	7PAA007950R1
PM867 Safe Ethernet Library License 6.2 Control functions for Safe Ethernet communication for 3 rd party PROFISafe devices. One license is needed for each PM867 using the library.	7PAA007951R1

System 800xA

Process Industries Application Libraries

Process Industries Application Libraries
The Process Industries Application Libraries (PIAL) in the price book include Process Control Device Library (PCDL), Process Control Equipment Library (PCEL) and ProBase Library. One valid license is required per 800xA system. User documentation is provided electronically with the product media. The licenses support use with System 800xA. These licenses entitle license holders to use the library in one system, meaning one Aspect Server. Please refer to System Guide Ordering and Licensing for more information.

PIAL Media

PIAL Media
Media for this product can be downloaded from ABB Library and MyABB/MyControlSystem.

Process Control Device Library

Process Control Device Library

The 800xA PC Device Library provides device-level objects. The PCDeviceLib is a customized library for the process industry. It builds upon the 800xA - AC 800M library to provide additional functionality and engineering efficiency. Benefits include minimizing the initial learning curve for the ABB Ability™ System 800xA Extended Automation and to minimize the engineering effort.

The PCDevice Library contains an extensive list of objects, but it is licensed only by the number of Control Elements used. Control Elements are the Valves, Motors and PID Loops in a system.

The following PCDevice library control modules are categorized as Control Elements – Valve, ValveMan, MotorOnOff, MotorOnOffAdv, Motor2Speed, MotorVarSpeed, ControllerPIDLoop, ControlValvePneumatic, ControlValveElectric, ChokeValve, MotorOnOffCore, Motor2SpeedCore and MotorVarSpeedCore.

Process Industries Application Libraries

Process Control Device Library Licenses

Article no.

Base Process Control Device Library 6.2

7PAA007734R1

The PCDevice Library comes with all PCDevice library objects but only the 13 objects listed above are counted as Control Elements. To arrive at the correct number of Control Elements to purchase, count the number of Valve, Motor and ControllerPIDLoop objects associated with the project. Including 125 Control Elements.

Additional Control Device Library Licenses

Additional Control Device Library Licenses

Article no.

Additional 125 Control Elements for PCDL 6.2

7PAA007735R1

Additional 125 Control Elements for Process Control Device Library (PCDL).

PCDL Application Engineering

PCDL Application Engineering

Article no.

PCDL License for Application Engineering 6.2

7PAA007736R1

This license is intended to use for Application Engineering purpose only. A maximum of 2 500 Control Elements will be issued as a part of the license. For production system, appropriate quantity of Control Elements license must be purchased separately.

PCDL Additional License for Application Engineering 6.2

7PAA007737R1

Each additional license comes with 2 500 control elements license.

Process Control Equipment Library

Process Control Equipment Library

Process Control Equipment Library (PCEquipmentLib) is a comprehensive library of Equipment Module templates, and toolkit components for industrial IT Extended Automation System 800xA.

PCEquipmentLib is designed to optimize the specification and building of ANSI/ISA-88.01-1995 style Equipment Modules and customized Process Units. Designed to "plug and produce" with standard PCDeviceLib control objects, PCEquipmentLib shares common terminology, engineering principles, and naming conventions to make engineering consistent and easy. It is a requirement to use a compatible version of PCDevice Library in conjunction with PCEquipment Library. Refer to PCEquipment Library release notes for appropriate version information.

The PCEquipment Library contains an extensive list of pre-engineered and validated objects like Unit template and Standard Phases, equipment modules, Quality Monitor, pcc supervision, EqTimer, Prompts/PromptsAlarmOwner etc. The PCEquipment Library also contains pre-engineered facility automation solution objects.

Process Control Equipment Library Licenses

Process Control Equipment Library Licenses	Article no.
Base PC Equipment Library – Batch 6.2 This license is for working with up to 125 PCDevice Lib Control Elements with Batch Management. This license shall allow using any number of PCEL Batch Unit type with Standard Phases. Requires Symbol Factory licence, to be ordered separately.	7PAA007738R1
Base PC Equipment Library – Non-Batch 6.2 This license is for working with up to 125 PCDevice Lib Control Elements without Batch Management. This license shall allow using any number of PCEL Equipment Module (EM) types with Device Summary and ModeControl. Requires Symbol Factory licence, to be ordered separately.	7PAA007739R1

PIAL Media

Additional Control Equipment Library Licenses

Additional Control Equipment Library Licenses

It is a requirement to use a compatible version of PCDevice Library in conjunction with PCEquipment Library. Refer to PCEquipment Library release notes for appropriate version information. Additional expansion licenses can be purchased. When ordering additional licenses, the original quantity and the license information must be included with the expansion order.

Additional Control Equipment Library Licenses	Article no.
Add. PC Equipment Lib. – Batch 6.2 Each Expansion license is for working with up to 125 PCDevice Lib Control Elements with Batch Management.	7PAA007740R1
Add. PC Equipment Lib. – non Batch 6.2 Each Expansion license is for working with up to 125 PCDevice Lib Control Elements without Batch Management.	7PAA007741R1

PCEL Application Engineering

PCEL Application Engineering	Article no.
PCEL License for Application Engineering 6.2 This license is intended to use for Application Engineering purpose only. A maximum of 20 PCEL with Batch Management license quantity will be issued as a part of this license, which can be used with both Batch and Non-Batch version of PC EquipmentLib.	7PAA007742R1
PCEL Additional License for Application Engineering 6.2 Each additional license comes with 20 PCEL license, which can be used with both Batch and Non-Batch version of PCEquipmentLib.	7PAA007743R1

ProBase

ProBase
ProBase is a set of System 800xA libraries with industry specific functionality targeting liquid process handling or other applications where routing, storage of material, CIP, etc. are a major concern in the application. Example industries are food & beverage, chemical, pharmaceuticals, tank farms, etc.

ProBase Licenses	Article no.
ProBase licensing is based on type and number of controllers executing ProBase.	
ProBase 6.1 PM858 SW Lic. 6.2	7PAA007756R1
ProBase 6.1 PM862 SW Lic. 6.2	7PAA007757R1
ProBase 6.1 PM866 SW Lic. 6.2	7PAA007746R1
ProBase 6.1 PM891 SW Lic. 6.2	7PAA007747R1

Localization

National Language Support (NLS) is intended for the localization of the operator interface to the desired language. NLS contains a set of functions that are harmonized with the Windows regional settings to enable a multilingual environment for the System 800xA.

The System 800xA supports translations, mainly the operator interface and the operator manuals as shown in the Table 3 and Table 4. The translation, or System 800xA Language Package, is implemented as a system extension and is possible to install without stopping the system.

The NLS Localization Guide describes what and how localization can be performed by a project with or without an installed Language Package. The English version of the Windows operating system is required. The System 800xA Language Packages can be downloaded free of charge from ABB Library.

It is always advisable to download full Language Package from ABB Library or advised, for each new installation to secure the latest updates for language packages.

Table 3. Supported Language Packages for Functional Areas in System 800xA 6.2

Language Packages	Functional Areas								
	Base System	Safety*	Operations Client	SMS & eMailing	Asset** Optimization	FOUNDATION FIELDBUS	Batch Management	Information*** Management	SFC Viewer
English (default)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Chinese	Yes	Yes	Yes		Yes	Yes	Yes	Yes	Yes
French	Yes	Yes	Yes	Yes				Yes	Yes
German	Yes	Yes	Yes	Yes	Yes		Yes	Yes	Yes
Spanish	Yes	Yes	Yes	Yes				Yes	Yes
Swedish	Yes	Yes	Yes	Yes			Yes	Yes	Yes

* Confirmation and authentication operation dialog Window for SIL-2 high integrity controller.

** Only system messages

*** Storage of messages in local language

Table 4. Supported Language Packages for Connectivity in System 800xA 6.2

Language Packages	Connectivity			
	800xA for AC 800M	800xA for Advant Master	PLC Connect	800xA for Melody
English (default)	Yes	Yes	Yes	Yes
Chinese	Yes	Yes	Yes	
French	Yes	Yes		
German	Yes	Yes		Yes
Spanish	Yes			
Swedish	Yes	Yes		

NLS language packs: NLS language is EN (English) by default. Other NLS Languages (Chinese, French, German, Spanish and Swedish) are made available within 3 to 6 months after the initial software version release. The order in which they are created is driven by global project requirements.

Panel 800 version 6.2

Panel 800 is a user-friendly, intuitive and ergonomic operator panel that combines slim, space saving dimensions with a comprehensive range of advanced functions.

Panel 800 family comprises of user-friendly, intuitive and ergonomic operator panels that combine slim, space-saving dimensions with a comprehensive range of advanced functions.

Adding to the already well established feature rich Panel 800 version 6.2 our new Rugged and Black panels are designed to perform in challenging harsh environments.

Whether it is heavy outdoor use, usage in areas with explosion risk, or ship bridge use in marine applications, they are ready to provide you with the information needed.

Designed to make process automation easy, all panels are equipped with advanced functionality for process and equipment control, maneuvered by touching the LCD display.

Combined with market-leading performance and stunning graphical ability, Panel 800 erodes the line between ordinary Operator Panels and PC-based HMIs.

Panels are configured using ABB's Panel Builder tool that contains a wide range of advanced functions. The functions are tested and developed with customer needs and preferences in focus.



Specifications Panel 800 version 6.2

Standard panels




Panel	PP875	PP881	PP883	PP886	PP895
Display size	7"	10.4"	12.1"	15.4"	21.5"
Display resolution, ratio	800 × 480 (16:9)	1024 × 600 (16:9)	1280 × 800 (16:10)	1280 x 800 (16:10)	1920 × 1080 (16:9)
Processor	ARM9 (1 GHz)				
Main memory	512 MB	1.0 GB	1.0 GB	1.0 GB	2.0 GB
External storage media	1 × SD card slot (or SDHC with latest image loaded).				
Dimension WxHxD (mm)	204 x 243 x 50	292 × 194 × 52	340 × 242 × 37	410 × 286 × 61	556 × 347 × 65
Net weight (kg)	0.8	1.65	2.6	3.85	7.38
Power supply	+24 VDC (18-32 VDC)				
Operating temperature	-10 to +60 °C				0 °C to +50 °C
Certification					
CE	CE, FCC, KCC				
UL	UL610-2-201				
Marine	DNV, KR, GL, LR, ABS, CCS				-
RoHS compliance	DIRECTIVE/2011/65/EU				
WEEE compliance	DIRECTIVE/2012/19/EU				

For details about the standard panels, please visit: 800xAhardwareselector.com

Specifications Panel 800 version 6.2

Black panels

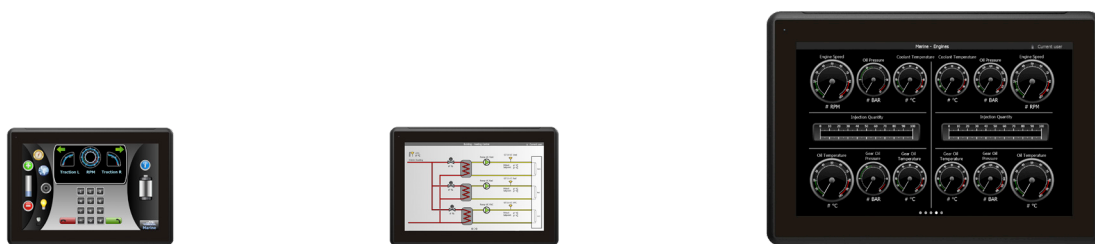

Panel	PP875M	PP875H	PP886M
Display size	7"	7"	15.4"
Display resolution, ratio	800 x 480 (16:9)	800 x 480 (16:9)	1280 x 800 (16:10)
Processor	ARM9 (1 GHz)		
Main memory	512 MB	2 GB	1 GB
External storage media	1 × SD card slot (or SDHC with latest image loaded)		
Dimension WxHxD (mm)	204 × 143 × 50		410 x 286 x 61
Net weight (kg)	0.8	0.8	3.85
Power supply	24 VDC (18-32 VDC)		
Operating temperature	-10 to +60 °C		
Certification			
CE	CE, FCC, KCC		
UL	UL61010-2-201		
Marine	DNV, KR, GL, LR, ABS, CCS		
RoHS compliance	DIRECTIVE/2011/65/EU		
WEEE compliance	DIRECTIVE/2012/19/EU		

For details about the black panels, please visit: 800xAhardwareselector.com

Specifications Panel 800 version 6.2

Rugged panels



Panel	PP886R	PP887H / PP887H-CFC	PP887S
Display size	15.4"		
Display resolution, ratio	1280 x 800 (16:10)		
Processor	ARM9 (800 MHz)	ARM9 (1 GHz)	ARM9 (1 GHz)
Main memory	1 GB	2 GB	2 GB
External storage media	1 × SD card slot (or SDHC with latest image loaded)		
Dimension WxHxD (mm)	410 × 286 × 73		
Net weight (kg)	4.1	4.1	4.8
Power supply	24 VDC (18-32 VDC)		
Operating temperature	-30 to +70 °C		
Certification			
CE	CE, FCC, KCC		
UL	UL-61010-2-201		
Marine	DNV, KR, GL, LR, ABS, CCS		
Hazardous	UI/cUL C1D2, ATEX (Zone 2, Zone 22), IECEx (Zone 2, Zone 22)		
RoHS compliance	DIRECTIVE/2011/65/EU		
WEEE compliance	DIRECTIVE/2012/19/EU		

PP887H-CFC has conformal coated circuit board for extra protection

For details about the rugged panels, please visit: 800xAhardwareselector.com

Panel 800 version 6.2

Control System Lifecycle Management Program

Lifecycle Management Program		
This product is covered by ABB's Control System Lifecycle Management program. To get more information, please contact your local ABB representative.		
Upgrade Orders		Article no.
	Panel Builder 800 Version 6, upgrade	3BSE069301R1
	Panel Builder 800 Version 6, for upgrades only!	

Panel 800 version 6.2


Panel Builder 800


Panel Builder 800	Article no.
Panel Builder 800 is the engineering tool for Panel 800.	
 Panel Builder 800 Version 6	3BSE069300R1

Panel 800 Version 6.2

Operator Panels

Standard Panels	Article no.
New operator panels introduced for Panel 800 version 6.2. All panels have TFT LCD touch screens. Requires Panel Builder 800 Version 6.2 for configuration.	
 PP875 Standard panel 7" 800 x 480 widescreen (16:9). Requires Panel Builder 800 Version 6.2 for configuration. To protect the front, it's recommended to use the RX874 Touch cover. Replaces PP874.	3BSE092977R1
 PP881 Standard panel 10" 1024 x 600 widescreen (16:9). Requires Panel Builder 800 Version 6.2 for configuration. To protect the front, it's recommended to use the RX881 Touch cover. Replaces PP877. For mounting in the same cut-out as PP877, RX800 Adapter plate is required.	3BSE092978R1
 PP883 Standard panel 12" 1280 x 800 widescreen (16:10). Requires Panel Builder 800 Version 6.2 for configuration. To protect the front, it's recommended to use the RX883 Touch cover. Replaces PP882.	3BSE092979R1
 PP886 Standard panel 15" 1280 x 800 widescreen (16:10). Requires Panel Builder 800 Version 6.2 for configuration. To protect the front, it's recommended to use the RX886 Touch cover. Replaces PP885.	3BSE092980R1
 PP895 Standard panel 21" 1920 x 1080 widescreen (16:9). Requires Panel Builder 800 Version 6.2 for configuration. To protect the front, it's recommended to use the RX895 Touch cover.	3BSE092981R1

Black Panels		Article no.
	PP875M Black Panel 7" 800 x 480 widescreen (16:9). Brightness 500 cd/m². Requires Panel Builder 800 Version 6.2 for configuration. To protect the front, it's recommended to use the RX874 Touch cover. Replaces PP874M.	3BSE092982R1
	PP875H Black Panel, High Brightness 7" 800 x 480 widescreen (16:9) Brightness 1000 cd/m². Requires Panel Builder 800 Version 6.2 for configuration. To protect the front, it's recommended to use the RX874 Touch cover.	3BSE092983R1
	PP886M Black Panel 15" 1280 x 800 widescreen (16:10). Brightness 450 cd/m². Requires Panel Builder 800 Version 6.2 for configuration. To protect the front, it's recommended to use the RX886 Touch cover. Replaces PP885M.	3BSE092984R1

Rugged Panels		Article no.
	PP886R Rugged Panel 15" 1280 x 800 widescreen (16:10). Brightness 450 cd/m². Requires Panel Builder 800 Version 6.2 for configuration. To protect the front, it's recommended to use the RX886 Touch cover. Replaces PP885R. One Ethernet port.	3BSE092985R1
	PP887H Rugged Panel, High Brightness 15" 1280 x 800 widescreen (16:10) Brightness 1000 cd/m². Requires Panel Builder 800 Version 6.2 for configuration. To protect the front, it's recommended to use the RX886 Touch cover. Replaces PP886H.	3BSE092986R1
	PP887H - Conformal Coated Rugged Panel 15" PP887H with conformal coating on the printed circuit board. 1280x800 widescreen (16:10) Brightness 1000 cd/m². Requires Panel Builder 800 Version 6.2 for configuration. To protect the front, it's recommended to use the RX886 Touch cover.	7PAA002011R1
	PP887S Rugged Panel, Sealed 15" 1280 x 800 widescreen (16:10) Brightness 1000 cd/m². Sealed on all sides, can be mounted directly on an arm. Requires Panel Builder 800 Version 6.2 for configuration. To protect the front, it's recommended to use the RX886 Touch cover. PP887S is a fully sealed version with M12 connectors with IP66 ingress protection rating and ATEX/IECEx Zone 2 and Zone 22 (IP65) certification.	3BSE092987R1

Panel 800 Version 6.2

Dongles

Dongles		Article no.
	Requires Panel 800 Runtime Version 6.2 to be installed on the PC. The USB dongle enables the runtime and the amount of signals.	
	Panel 800 Version 6.2 dongle 250 tags. USB dongle for 250 signals (tags).	3BSE093564R1
	Panel 800 Version 6.2 dongle 2000 tags. USB dongle for 2000 signals (tags).	3BSE093565R1
	Panel 800 Version 6.2 dongle 4000 tags. USB dongle for 4000 signals (tags).	3BSE093566R1

Panel 800 Version 6.2

Accessories

Communication Interface for Panel 800		Article no.
	CB802 Profibus DP Interface PROFIBUS DP slave expansion module for Panel 800 Version 6 panels. Not possible to use for PP880R, PP885H, PP885M, PP885R, PP886H, PP887H and PP887S. Not marine certified.	3BSE069285R1
	CB820 USB to Ethernet adapter for programming USB to Ethernet adapter with software. Cross over Ethernet patch cable included.	7PAA002012R1

Connection Cables for Panel 800		Article no.
	TK858V002 Adapter cable (CAB 107) Adapter cable RS232 - RS485 0.2 m 9 pin D-Sub to 25 pin D-Sub. For using version 5 RS422/485 cables on Version 6 panels.	3BSE069474R1
	TK859V000 Gender changer (CAB 108) Gender changer 9 pin D-Sub male/male.	3BSE069475R1
	TK860V001 Splitter cable (CAB 109) Splitter cable Version 6 panel. Y-split for use with one RS232 and one RS422 connection. Not possible to use with PP887S.	3BSE069476R1
	TK868V002 Splitter 3 way (CAB 150) Splitter cable. Used when two serial RS485 connections are needed (1xRS232 + 2xRS485). Not possible to use with PP887S.	3BSE093567R1
	TK865V030 Cable m. 8p to blank 3 m (COM) Cable M12 male 8 pin to blank, 3 m (COM). Only for PP887S with M12 contacts.	3BSE092988R1
	TK865V100 Cable m. 8p to blank 10 m (COM) Cable M12 male 8 pin to blank, 10 m (COM). Only for PP887S with M12 contacts.	3BSE092989R1

Connection Cables for Panel 800		Article no.
	TK866V030 Cable m. 4p to blank 3 m (LAN) Cable M12 male 4 pin to blank, 3 m (LAN). Only for PP887S with M12 contacts.	3BSE092990R1
	TK866V100 Cable m. 4p to blank 10 m (LAN) Cable M12 male 4 pin to blank, 10 m (LAN). Only for PP887S with M12 contacts.	3BSE092991R1
	TK867V030 Cable f. 4p to blank 3 m (POW) Cable M12 female 4 pin to blank, 3 m (POWER). Only for PP887S with M12 contacts.	3BSE092992R1
	TK867V100 Cable f. 4p to blank 10 m (POW) Cable M12 female 4 pin to blank, 10 m (POWER). Only for PP887S with M12 contacts.	3BSE092993R1
	TK865V000 Conn. 8p male 5.5-7.5 mm (COM) Connector M12 male 8 pin 5.5 - 7.5 mm, Gland (COM) Only for PP887S with M12 contacts.	3BSE092994R1
	TK866V000 Conn. 4p male 5.5-7.5mm (LAN) Connector M12 male 4 pin 5.5 - 7.5 mm, Gland (LAN) Only for PP887S with M12 contacts.	3BSE092995R1
	TK867V000 Conn. 4p fem. 5.5-7.5mm (POW) Connector M12 female 4 pin 5.5 - 7.5 mm, Gland (POWER) Only for PP887S with M12 contacts.	3BSE092996R1

Front Protections		Article no.
	RX874 Touch cover 7" Plastic cover for protection. Possible to use for PP880R, PP874, PP874M, PP875, PP875M and PP875H.	3BSE069287R1
	RX881 Touch cover 10" Plastic cover for protection. Possible to use for PP881.	3BSE093559R1
	RX883 Touch cover 12" Plastic cover for protection. Possible to use for PP883.	3BSE093560R1
	RX886 Touch cover 15" Plastic cover for protection. Possible to use for PP886, PP886M, PP886R, PP887H and PP887S.	3BSE093561R1
	RX895 Touch cover 21" Plastic cover for protection. Possible to use for PP895.	3BSE093562R1

Adapter Plates		Article no.
	RX800 Adapter plate for PP877 to PP881 Adapter plate for installing the replacement panel PP881 on a PP877 mounting.	3BSE093563R1

Miscellaneous		Article no.
	Compact Flash Card 4GB Compact Flash memory for AC 800M and Panel 800.	2PAA121688R1

AC 800M Processor Units

CPU Modules

Several CPU modules are available that vary in terms of processing power, memory size, and redundancy support. Each CPU module is equipped with built in Ethernet port(s) for communication with other controllers and for interaction with operators, engineers, managers, and higher level applications.

These ports can be configured for redundancy for those cases where availability is of paramount importance. It is also equipped with two RS-232C ports that can be used for point-to-point communication with programming/debugging tools and with third-party systems and devices.

The AC 800M HI controllers are SIL3-rated, IEC 61508-certified, TÜV and ISASecure certified.

The AC 800M controller can be configured with 800xA control builder. When configured with the 800xA control builder AC 800M becomes a tightly integrated part of the System 800xA.

Communication & I/O Modules

To each CPU module, a number of communication and I/O modules can be added, for example:

- Additional RS-232C ports
- DeviceNet
- Ethernet IP
- Foundation Fieldbus HSE/H1
- IEC 61850
- MasterBus 300
- MODBUS TCP
- OPC UA
- PROFIBUS DP, PROFINET IO
- S100 I/O
- S800 I/O
- S800L I/O
- S900 I/O
- S800 on Ethernet
- Select I/O



AC 800M controller



AC 800M High Integrity controller



AC 800M PM891 controller

AC 800M Controllers selection guide

Features / CPUs	PM851A	PM856A	PM857	PM858	PM860A	PM862	PM863
Processor Unit	PM851AK01 incl: 1 PM851A CPU and required optional items	PM856AK01 incl: 1 PM856A CPU and required optional items	PM857K01 incl: 1 PM857 CPU and required optional items PM857K02 incl: 2 PM857K01	PM858K01 incl: 1 PM858 CPU and required optional items PM858K02 incl: 2 PM858K01	PM860AK01 incl: 1 PM860A CPU and required optional items	PM862K01 incl: 1 PM862 CPU and required optional items. PM862K02 incl: 2 PM862K01	PM863K01 incl: 1 PM863 CPU and required optional items PM863K02 incl: 2 PM863K01
Optional items (partly included in Processor Units, see Price List)	TP830 Baseplate, TP850 CEX-bus term., TK850 CEX-bus cable, TB807, Modulebus term, Battery RAM backup, TB852/TB853 RCU-link term, TB851/TB855/TB856 RCU-link cable, SB822 External Battery Unit, TK212A Tool cable, TC562 Short Distance Modem, TK853V020 Modem cable, BC810K02, BC820K02, CEX-bus Interconnection unit; TK851V010 Connection cable, SD831/SD832/SD833, SD853/SD854 Power Supply, SS832 Voting Unit, Mains Breaker Kit, SM811 Supervisory Module and SM812 Supervisory Module.						
High Integrity Controller	No	No	Yes	No	No	No	Yes
Clock frequency	24 MHz	24 MHz	96 Mhz	33 MHz	48 MHz	67 MHz	96 Mhz
Memory (RAM)	8 MB	8 MB	32 MB	16 MB	8 MB	32 MB	32 MB
From 5.1 FP4	12 MB	16 MB			16 MB		
RAM available for application	2.282 MB	2.282 MB	22.184 MB	7.147 MB	2.282 MB	23.521 MB	22.184 MB
From 5.1 FP4	6.253 MB	10.337 MB			10.346 MB		
Processor type	MPC860	MPC860	MPC866	MPC866	MPC860	MPC866	MPC866
Flash memory for storage of application and data	Yes	Yes	No	Yes	Yes	Yes	No
CPU redundancy support	No	No	Yes	Yes	No	Yes	Yes
Switch over time in red. conf.	-	-	Max 10 ms	Max 10 ms	-	Max 10 ms	Max 10 ms
Performance, 1000 boolean operations (a:=b and c)	0.46 ms	0.46 ms	0.17 ms	0.36 ms	0.23 ms	0.18 ms	0.17 ms
No. controllers per control projects	32						
No. of applications per control project	1024						
No. of applications per controller	32						
No. of programs per application	64						
No. of tasks per controller	32						
Number of different cycle times	32						
Cycle time per application programs	Down to 1 ms (HI Integrity controllers 10 ms)						
Flash PROM for firmware storage	2 MB	2 MB	18 MB	4 MB	2 MB	4 MB	18 MB
Power supply	24 V DC (19.2-30 V DC) max 5 % ripple acc. to IEC 61131-2						
Power consumption +24 V	typ/max 180/300 mA	typ/max 180/300 mA	typ/max 210/360 mA	typ/max 210/360 mA	typ/max 180/300 mA	typ/max 210/360 mA	typ/max 210/360 mA
Power dissipation typ.	4.32 W	4.32 W	5.1 W	5.1 W	4.32 W	5.1 W	5.1 W
Power Reservoir	Internal 5 ms power reservoir, sufficient for the CPU to make a controlled power down						
Power supply connector	Detachable 4-pole screw terminal block						
Redundant power supply status inputs	Yes: 2 inputs designated SA, SB (Max 30 V, high level >15 V, low level < 8 V)						
Built-in back-up battery	Type: Lithium, 3.6 V, 0.95 Ah, size 1/2 AA, 0.3 g Lithium content						
Real-time clock stability	100 ppm (approx. 1 h/year)						
Clock synchronization	1 ms between AC 800M controllers by CNCP protocol						
Comm. modules on CEX bus	1	12 single CEX bus modules	12	12	12 single CEX bus modules	12	12

Features / CPUs	PM851A	PM856A	PM857	PM858	PM860A	PM862	PM863
Supply current on CEX bus	Supply current: Max 24 V - 2.4 A (fuse 3.15 A fast, PM891 has an embedded auto fuse)						
I/O clusters on Modulebus with non-redundant CPU	1 el. + 1 opt.	1 el. + 7 opt.	1 el. + 7 opt.	1 el. + 7 opt.	1 el. + 7 opt.	1 el. + 7 opt.	1 el. + 7 opt.
I/O clusters on Modulebus with redundant CPU	NA	NA	0 el. + 7 opt.	7 optical	NA	7 optical	0 el. + 7 opt.
I/O capacity on Modulebus with non-redundant/redundant CPU	Max 24/NA I/O modules	Max 96/NA I/O modules	Max 96/84 I/O modules and max 128 I/O channels	Max 96/84 I/O modules	Max 96/NA I/O modules	Max 96/84 I/O modules	Max 96/84 I/O modules
Modulebus scan rate	0 - 100 ms (actual time depending on number of I/O modules)						
Supply current on Electrical Modulebus	Supply current: Max 24 V - 1.0 A (short circuit proof, fuse 2.0 A), Max 5 V - 1.5 A (short circuit proof)						
I/O capacity on PROFIBUS (remote I/O)	Max 99 I/O stations (max 62 redundant I/O stations), max 24 I/O modules per I/O station (max 12 redundant I/O pairs)						
Ethernet channels	1	2	2	2	2	2	2
Ethernet interface	Ethernet (IEEE 802.3), 10 Mbit/s, RJ-45, female (8-pole)						
Control Network protocol	MMS (Manufacturing Message Service) and IAC (Inter Application Communication)						
Recommended Control Network backbone	100 Mbit/s switched Ethernet						
No. of controllers on Control Network	Max 50						
RS-232C interface	2 (one general, 1 for service tool)						
RS-232C interface (COM3) (non red.conf. only)	RS-232C, 75-19 200 baud, RJ-45 female (8-pole), not opto isolated, full RTS-CTS support						
RS-232C interface (COM4) (non red.conf. only)	RS-232C, 9 600 baud, RJ-45 female (8-pole), opto isolated, no RTS-CTS support						
Temperature							
• Operating	+5 to +55 °C (41 to +131 °F)						
• Storage	-40 to +70 °C (-40 to +158 °F)						
Temperature changes	3 °C/minutes according to IEC/EN 61131-2						
Altitude	2000 m according to IEC/EN 61131-2						
Pollution degree	Degree 2 according to IEC/EN 61131-2						
Corrosion protection	G3 compliant to ISA 71.04						
Vibration	10 < f < 50 Hz: 0.0375 mm amplitude, 50 < f < 150 Hz: 0.5 g acceleration, 5 < f < 500 Hz: 0.2 g acceleration						
Emitted noise	< 55 dB (A)						
Shock, no package	150 m/s ² in 11 ms, 20 g in 3 ms						
Relative humidity	5 to 95 %, non-condensing						
Isolation voltage	Type test voltage: 500 V AC (corresponding to 700 V DC)						
Environmental conditions	Industrial						
Protection class	IP20 according to EN 60529, IEC 529						
Certificates and Standards *	CE- marking: Meets EMC directive 2004/108/EC acc. to EN 61000-6-4, EN 61000-6-2 and Low Voltage Directive acc. to EN 61131-2 Electrical Safety: EN 50178, IEC 61131-2, UL 508 Hazardous location: UL 60079-15, cULus Class 1, Zone 2, AEx nA IIC T4, ExnA IIC T4Gc X RoHS compliance: EN 50581:2012 WEEE compliance: DIRECTIVE/2012/19/EU						
ISASecure certified			Yes	Yes			Yes
TÜV Approval	No	No	IEC 61508 SIL3	No	No	No	IEC 61508 SIL3
Emission	Tested according to EN 61000-6-4 EMC – Generic Emission Standard, Part 2 – Industrial Environment						
Immunity	Tested according to EN 61000-6-2 EMC – Generic Immunity Standard, Part 2 – Industrial Environment						
Dimensions	Width 119 x Height 186 x Depth 135 mm (4.7 x 7.3 x 5.3 in.)						
Weight (including base)	1100 g (2.4 lbs)	1100 g (2.4 lbs)	1200 g (2.6 lbs)	1200 g (2.6 lbs)	1100 g (2.4 lbs)	1200 g (2.6 lbs)	1200 g (2.6 lbs)

* For detailed information on each module, please visit: 800xahardwareselector.com


AC 800M Controllers selection guide

Features / CPUs	PM866A	PM867	SM812	PM891
Processor Unit	PM866AK01 incl: 1 PM866A CPU and required optional items PM866AK02 incl: 2 PM866AK01	PM867K01 incl: 1 PM867 CPU and required optional items PM867K02 incl: 2 PM867K01	SM812K01 incl: 1 SM812	PM891K01 incl: 1 PM891 CPU and required optional items PM891K02 incl: 2 PM891K01
Optional items (partly included in Processor Units, see Price List)	TP830 Baseplate, TP850 CEX-bus term., TK850 CEX-bus cable, TB807, Modulebus term, Battery RAM backup, TB852/TB853 RCU-link term, TB851/TB855/TB856 RCU-link cable, SB822 External Battery Unit, TK212A Tool cable, TC562 Short Distance Modem, TK853V020 Modem cable, BC810K02, BC820K02, CEX-bus Interconnection unit; TK851V010 Connection cable, SD831/SD832/SD833, SD853/SD854 Power Supply, SS832 Voting Unit, Mains Breaker Kit, SM811 Supervisory Module and SM812 Supervisory Module.			
High Integrity Controller	No	Yes	Yes	No
Clock frequency	133 MHz	133 MHz	133 MHz	450 MHz
Memory (RAM) From 5.1 FP4	64 MB	64 MB	64 MB	256 MB
RAM available for application	51.389 MB	46.559 MB	-	208.985 MB
Processor type	MPC866	MPC866	MPC866	MPC8270
Flash memory for storage of application and data	Yes	No	No	Yes
CPU redundancy support	Yes	Yes	Yes	Yes
Switch over time in red. conf.	Max 10 ms	Max 10 ms	Max 10 ms	Max 10 ms
Performance, 1000 boolean operations (a:=b and c)	0.09 ms	0.09 ms	-	0.043 ms
No. controllers per control projects	32			
No. of applications per control project	1024			
No. of applications per controller	32			
No. of programs per application	64			
No. of tasks per controller	32			
Number of different cycle times	32			
Cycle time per application programs	Down to 1 ms (HI Integrity controllers 10 ms)			
Flash PROM for firmware storage	4 MB	18 MB	4 MB	16 MB
Power supply	24 V DC (19.2-30 V DC) max 5 % ripple acc. to IEC 61131-2			
Power consumption +24 V (typ/max)	210/360 mA	210/360 mA	160/250 mA	660/750 mA
Power dissipation typ.	5.1 W	5.1 W	3.8 W	15.8 W
Power Reservoir	Internal 5 ms power reservoir, sufficient for the CPU to make a controlled power down			
Power supply connector	Detachable 4-pole screw terminal block			
Redundant power supply status inputs	Yes: 2 inputs designated SA, SB (Max 30 V, high level >15 V, low level < 8 V)			
Built-in back-up battery	Type: Lithium, 3.6 V, 0.95 Ah, size 1/2 AA, 0.3 g Lithium content	No	No	No
Real-time clock stability	100 ppm (approx. 1 h/year)			50 ppm
Clock synchronization	1 ms between AC 800M controllers by CNCP protocol			
Comm. modules on CEX bus	12	12	12	12
Supply current on CEX bus	Supply current: Max 24 V - 2.4 A (fuse 3.15 A fast, PM891 has an embedded auto fuse)			
I/O clusters on Modulebus with non-redundant CPU	1 el. + 7 opt.	N/A	1 el. + 7 opt.	1 el. + 7 opt. N/A 0 el. + 7 opt.
I/O clusters on Modulebus with redundant CPU	0 el. + 7 opt.	N/A	0 el. + 7 opt.	0 el. + 7 opt. N/A 0 el. + 7 opt.

Features / CPUs	PM866A	PM867	SM812	PM891
I/O capacity on Modulebus with non-redundant/redundant CPU	Max 96/84 I/O modules	Max 96/84 I/O modules	N/A	Max 84/84 I/O modules
Modulebus scan rate	0 - 100 ms (actual time depending on number of I/O modules), 0 - 300 for PM865 and PM867			
Supply current on Electrical Modulebus	24 V : max 1.0 A 5 V : max 1.5 A			Not supported
I/O capacity on PROFIBUS (remote I/O)	Max 99 I/O stations (max 62 redundant I/O stations), max 24 I/O modules per I/O station (max 12 redundant I/O pairs)			
Ethernet channels	2	2	N/A	2
Ethernet interface	Ethernet (IEEE 802.3), 10 Mbit/s, RJ-45, female (8-pole)			10/100 Mbit/s
Control Network protocol	MMS (Manufacturing Message Service) and IAC (Inter Application Communication)			
Recommended Control Network backbone	100 Mbit/s switched Ethernet			
No of controllers on Control Network	Max 50			
RS-232C interface	2 (one general, 1 for service tool)		N/A	1 for service tool (COM 4)
RS-232C interface (COM3) (non red.conf. only)	RS-232C, 75-19 200 baud, RJ-45 female (8-pole), not opto isolated, full RTS-CTS support		N/A	Not supported
RS-232C interface (COM4) (non red.conf. only)	RS-232C, 9 600 baud, RJ-45 female (8-pole), opto isolated, no RTS-CTS support			
Temperature				
• Operating	+5 to +55 °C (+41 to +131 °F)			
• Storage	-40 to +70 °C (-40 to +158 °F)			
Temperature changes	3 °C/minutes according to IEC/EN 61131-2			
Altitude	2000 m according to IEC/EN 61131-2			
Pollution degree	Degree 2 according to IEC/EN 61131-2			
Corrosion protection	G3 compliant to ISA 71.04			
Vibration	10 < f < 50 Hz: 0.0375 mm amplitude, 50 < f < 150 Hz: 0.5 g acceleration, 5 < f < 500 Hz: 0.2 g acceleration			
Emitted noise	< 55 dB (A)			
Shock, no package	150 m/s ² in 11 ms, 20 g in 3 ms			
Relative humidity	5 to 95 %, non-condensing			
Isolation voltage	Type test voltage: 500 V AC (corresponding to 700 V DC)			
Environmental conditions	Industrial			
Protection class	IP20 according to EN 60529, IEC 529			
Certificates and Standards *	CE- marking: Meets EMC directive 2004/108/EC acc. to EN 61000-6-4, EN 61000-6-2 and Low Voltage Directive acc. to EN 61131-2 Electrical Safety: EN 50178, IEC 61131-2, UL 508 Hazardous location: UL 60079-15, cULus Class 1, Zone 2, AEx nA IIC T4, ExnA IIC T4Gc X RoHS compliance: EN 50581:2012 WEEE compliance: DIRECTIVE/2012/19/EU			
ISASecure certified	Yes	Yes		
TÜV Apparoal	No	IEC 61508 SIL3	IEC 61508 SIL3	No
Emission	Tested according to EN 61000-6-4 EMC – Generic Emission Standard, Part 2 – Industrial Environment			
Immunity	Tested according to EN 61000-6-2 EMC – Generic Immunity Standard, Part 2 – Industrial Environment			
Height	186 mm (7.3 in.)	186 mm (7.3 in.)	186 mm (7.3 in.)	186 mm (7.3 in.)
Width	119 mm (4.7 in.)	119 mm (4.7 in.)	59 mm (2.9 in.)	174 mm (6.9 in.)
Depth	135 mm (5.3 in.)	135 mm (5.3 in.)	127.5 (5.0 in.)	94 mm (3.7 in.)
Weight (including base)	1200 g (2.6 lbs)	1200 g (2.6 lbs)	700 g (1.5 lbs)	1600 g (3.5 lbs)

* For detailed information on each module, please visit: 800xahardwareselector.com

Measurements

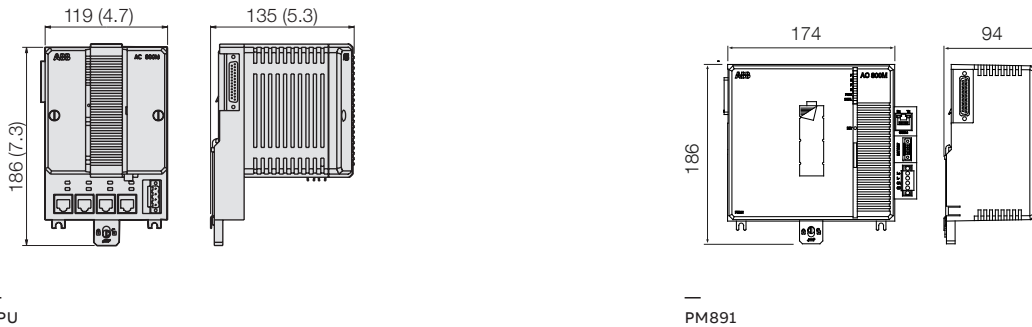

CPU

PM891

AC 800M Hardware

Hardware Upgrade orders

Hardware Upgrade orders

For Hardware Upgrade orders please send your inquiry to Service Center mail box: offer.selog@se.abb.com

ISA-S71.04 level G3 Compliance

Modules are compliant to ISA-S71.04 level G3, unless explicitly stated differently.

Extended Warranty for AC 800M Hardware

We can offer an extended warranty for one, two, three or four years in addition to normal warranty conditions for AC 800M Hardware. See price list Extended Warranty - AC 800M, S800 I/O, S900 I/O and Fieldbus.

AC 800M Hardware

System Units

System Units



The TK212 cable is used for maintenance puposes together with the AC 800M controllers. It allows you to download the firmware and configure the IP of the controller. Please order a TK212 cable together with your first order of PM851AK01, PM856AK01, PM857K01, PM857K02, PM858K01, PM858K02, PM860AK01, PM862K01, PM862K02, PM863K01, PM863K02, PM866AK01, PM866AK02, PM867K01, PM867K02, PM891K01 or PM891K02.

AC 800M Hardware

AC 800M Processor Units

800M Processor Units

Article no.



PM851AK01 Processor Unit (24 MHz and 12 MB)

3BSE066485R1

Package including:

- PM851A, CPU
- TP830, Baseplate, width = 115 mm
- TB850, CEX-bus terminator
- TB807, ModuleBus terminator
- Battery for memory backup (4943013-6)
- No licence included

PM856AK01 Processor Unit (24 MHz and 16 MB)

3BSE066490R1

Package including:

- PM856A, CPU
- TP830, Baseplate, width = 115 mm
- TB850, CEX-bus terminator
- TB807, ModuleBus terminator
- Battery for memory backup (4943013-6)
- No licence included

AC 800M Hardware

AC 800M Processor Units

800M Processor Units	Article no.
	PM858K01 Processor Unit (33 MHz and 16 MB) Package including: • PM858, CPU • TP830, Baseplate, width = 115mm • TB850, CEX-bus terminator • TB807, ModuleBus terminator • TB852, RCU-Link terminator • Battery for memory backup (4943013-6) • No license included Only compatible with 800xA 6.0.2, Compact Control Builder 6.0.0-1 and onwards. Please see Product Update for more information.
	PM858K02 Redundant Processor Units (33 MHz and 16MB) Package including: • 2 pcs PM858, CPU • 2 pcs TP830, Baseplate, width = 115mm • 2 pcs TB807, ModuleBus terminator • 1 pcs TK850, CEX-bus expansion cable • 1 pcs TK851, RCU-Link cable • 2 pcs Battery for memory backup (4943013-6) • No license included Only compatible with 800xA 6.0.2, Compact Control Builder 6.0.0-1 and onwards. Please see Product Update for more information.
	PM860AK01 Processor Unit (48 MHz and 16 MB) Package including: • PM860A, CPU • TP830, Baseplate, width = 115 mm • TB850, CEX-bus terminator • TB807, ModuleBus terminator • Battery for memory backup (4943013-6) • No license included
	PM862K01 Processor Unit (67 MHz and 32 MB) Package including: • PM862, CPU • TP830, Baseplate, width = 115mm • TB850, CEX-bus terminator • TB807, ModuleBus terminator • TB852, RCU-Link terminator • Battery for memory backup (4943013-6) • No license included Only compatible with 800xA 6.0.2, Compact Control Builder 6.0.0-1 and onwards. Please see Product Update for more information.
	PM862K02 Redundant Processor Units (67 MHz and 32 MB) Package including: • 2 pcs PM862, CPU • 2 pcs TP830, Baseplate, width = 115mm • 2 pcs TB807, ModuleBus terminator • 1 pcs TK850, CEX-bus expansion cable • 1 pcs TB851, RCU-Link cable • 2 pcs Battery for memory backup (4943013-6) • No license included Only compatible with 800xA 6.0.2, Compact Control Builder 6.0.0-1 and onwards. Please see Product Update for more information.

AC 800M Hardware

AC 800M Processor Units

800M Processor Units	Article no.
	PM866AK01 Processor Unit (133 MHZ and 64 MB) Package including: • PM866A, CPU • TP830, Baseplate, width = 115mm • TB850, CEX-bus terminator • TB807, ModuleBus terminator • TB852, RCU-Link terminator • Battery for memory backup (4943013-6) • No license included
	PM866AK02 Red. Processor Units (133 MHz and 64 MB) Package including: • 2 pcs PM866A, CPU • 2 pcs TP830, Baseplate, width = 115mm • 2 pcs TB807, ModuleBus terminator • 1 pcs TK850, CEX-bus expansion cable • 1 pcs TB851, RCU-Link cable • 2 pcs Battery for memory backup (4943013-6) • No license included
	PM891K01 Processor Unit (450 MHZ and 256 MB) Package including: • PM891 CPU Module • TB850, CEX-bus terminator • TB853, RCU Control Link Terminator • No license included
	PM891K02 Redundant Processor Unit (450 MHZ and 256 MB) Package including: • 2 pcs PM891K01 Processor Unit • 1 pcs TK850V007 CEX-bus Extension Cable • 1 pcs TK855 RCU Data Link Cable • 1 pcs TK856 RCU Control Link Cable • No license included
	Please note: The BC810K02 is not included in the PM891K02 Redundant Processor Unit kit. In order to make hot replacement of PM891 Processor Unit possible, the BC810K02 is required and has to be ordered separately.
	SB822 Rechargeable Battery Unit External DIN-rail mounted rechargeable battery unit including lithium-battery, 24 V DC connector and connection cable TK821V020. Width=85 mm. Equivalent amount of Lithium metal is 0.8 g (0.03 oz)
	Compact Flash Card 4 GB Compact Flash memory card for AC 800M controllers.

System Units

AC 800M High Integrity Units

AC 800M High Integrity Units	Article no.
High integrity, certified for SIL3. Requires configuration according to Safety Manual. Local organizations must comply with the Qualifications to secure successful sales of ABB safety systems, to order safety equipment.	
 PM857K01 Processor Unit HI 96 MHz and 32 MB. Max 128 I/O signals. Package including: • PM857, Safety CPU • TP830, Baseplate • TB850, CEX-bus terminator • TB807, ModuleBus terminator • TB852, RCU-Link terminator • Battery for memory backup (4943013-6) • No license included. Only compatible with 800xA 6.1, Control Builder Safe 3 and onwards. Please see Product Update for more info.	3BSE088385R1
 PM857K02 Redundant Processor Unit HI 96 MHz and 32 MB. Max 128 I/O signals. Package including: • 2 pcs PM857K01, Safety Processor unit. • TK850, CEX-bus expansion cable. • TK851, RCU-Link cable. • No license included. Only compatible with 800xA 6.1, Control Builder Safe 3 and onwards. Please see Product Update for more info.	3BSE088386R1
PM863K01 Processor Unit HI 96 MHz and 32 MB. Package including: • PM863, Safety CPU • TP830, Baseplate • TB850, CEX-bus terminator • TB807, ModuleBus terminator • TB852, RCU-Link terminator • Battery for memory backup (4943013-6) • No license included. Only compatible with 800xA 6.1, Control Builder Safe 3 and onwards. Please see Product Update for more info.	3BSE088381R1
PM863K02 Redundant Processor Unit HI 96 MHz and 32 MB. Package including: • 2 pcs PM863K01, Safety Processor unit. • TK850, CEX-bus expansion cable. • TK851, RCU-Link cable. • No license included. Only compatible with 800xA 6.1, Control Builder Safe 3 and onwards. Please see Product Update for more info.	3BSE088382R1
PM867K01 Processor Unit HI 133 MHz and 64 MB Package including: • PM867, CPU • TP830, Baseplate, width = 115 mm • TB850, CEX-bus terminator • TB807, ModuleBus terminator • TB852, RCU-Link terminator • Battery for memory backup (4943013-6) • No license included Only compatible for 800xA 6.0.2 and onwards. Please see Product Update for more information.	3BSE076355R1
PM867K02 Red. Processor Units HI 133 MHz and 64 MB Package including: • 2 pcs PM867, CPU • 2 pcs TP830, Baseplate, width = 115 mm • 2 pcs TB807, ModuleBus terminator • 1 pcs TK850, CEX-bus expansion cable • 1 pcs TB851, RCU-Link cable • 2 pcs Battery for memory backup (4943013-6) • No license included Only compatible for 800xA 6.0.2 and onwards. Please see Product Update for more information.	3BSE081638R1

AC 800M High Integrity Units	Article no.
	SM812K01 Safety CPU module High integrity, certified for SIL3. Requires configuration according to Safety Manual. Local organizations must comply with the Qualifications to secure successful sales of ABB safety systems, to order safety equipment. Use with PM857, PM863 and PM867. Package including: • SM812, Safety Module • TP868, Baseplate, width = 60 mm • TK852V10, Synchronization link cable Only compatible for 800xA 6.0.2 and onwards. Please see Product Update for more information.
	SS823 Voter and Over Voltage Protection Required in a High Integrity 800xA system. One per power supply unit, also at redundant configurations. Input D.C.. 24 V. Dual 24 V to single 24 V, 20 A. Certified for SIL3 according to IEC 61508 DIN rail mounted.

System Units

Extra Batteries

Extra Batteries	
	For extra Lithium batteries (4943013-6), please refer to Business Online (BOL).

Communication

Control Network

Control Network	
	No articles, such as cables, hubs, switches etc, for Control Network are included in this price list. Please refer to Product Guide AC 800M, for recommended articles. However our 800xA network articles are included in this Product Catalog further back from page 106.
	Recommended network components are available in the 800xA Networks price list.

Communication

Serial Interfaces on TP830

Serial Interfaces on TP830		Article no.
RS232-C interfaces for protocols COMLI, MODBUS, Siemens 3964R, the free-programmable serial protocol etc. Also for connection of engineering tool.		
	TK212A Tool cable RJ45 8P8C plug Used to connect a PC to CI801, CI840 or CI840A for download of software. Download to CI801 requires a TK527V030 in addition. RJ45 (male) to Dsub-9 (female), length 3 m. RJ45 8P8C plug (with shell). Cable: UL2464 26 AWG x 8C.	3BSC630197R1
	TC562 Short Distance Modem Length < 10 km. Point-to-point up to 1 km at 19200 bps. G1 compliant. Power 24 V d.c. To be used with CI531, CI532Vxx, CI534Vxx, CI853. Note! This part is exempted from the scope of 2011/65/EU (RoHS) as provided in Article 2(4)(c), (e), (f) and (j) therein (ref.: 3BSE088609 – EU DECLARATION OF CONFORMITY – ABB Advant Master Process Control System)	3BSC630049R1
	TK853V020 Modem Cable, 2 m Modem cable for serial interfaces on TP830. Cable for connection between modem TC562 and TP830.	3BSC950201R1

AC 800M Controller and Communication Interface selection guide

Supported Communication modules	PROFIBUS DP	FOUNDATION FIELDBUS	RS-232 C	MB300
Module	CI854B	CI860	CI853	CI855
Protocol	DP-V1 (PA via Linking Device)	FF HSE (H1 via Linking Device)	MODBUS RTU master, COMLI master/ slave, Siemens 3964R master, User defined protocols	MasterBus 300
Master or slave	Master	Master	Master/slave	Master
Number of channels	2	1	2	2
Max units on CEX bus	12	12	12	12
Transmission speed	9.6 - 12,000 kbit/s	10/100 Mbit/s	75 - 19 200 b/s	10 Mbit/s, 200 Datasets/s
Cable redundancy	Yes	No	No	Yes
Module redundancy	Yes	Yes	No	No
Hot Swap	Yes	Yes	Yes	Yes
Used together with High Integrity Controller	Yes	No	Yes	Yes
Connectors	DB female (9-pin)	RJ-45 female (8-pin)	RJ-45 female (8-pin)	RJ-45 female (8-pin)
24 V current consumption	Typ 190 mA	Typ 100 mA	Typ 100 mA	Typ 150 mA
Protection class	IP20 according to EN60529, IEC 529			
Certification *				
• CE-marked	Yes	Yes	Yes	Yes
• UL 508	Yes	Yes	Yes	Yes
• UL 60079-15 (Class 1 Zone 2)	Yes	Yes	Yes	Yes
• RoHS compliance	EN 50581:2012			
• WEEE compliance	DIRECTIVE/2012/19/EU			
Dimensions	Width 58 x Height 186 x Depth 135 mm (2.3 x 7.3 x 5.3 in.)			
Weight (including base)	700 g (1.5 lbs)	455 g (0.9 lbs)	520 g (1.2 lbs)	700 g (1.5 lbs)

Supported Communication modules	INSUM	Drivebus	S100 I/O	Satt I/O	MODBUS TCP	IEC 61850
Module	CI857	CI858	CI856	CI865	CI867A	CI868A
Protocol	IEEE 802.3	ABB's DriveBus	ABB's S100 I/O	ABB's Satt I/O	MODBUS TCP	IEC 61850
Master or slave	Master	Master	Master	Master	Master/slave	
Number of channels	1	1 main, 2 aux	1	1	1	1
Max units on CEX bus	6	2	12	4	12	12
Transmission speed	10 Mbit/s	4 Mbit/s	–	–	10/100 Mbit/s (Ch1)	10/100 Mbit/s
Cable redundancy	No	No	No	No	No	No
Module redundancy	No	No	No	No	Yes	No
Hot Swap	Yes	Yes	Yes	Yes	Yes	Yes
Used together with High Integrity Controller	Yes	No	No	No	Yes	Yes
Connectors	RJ-45 female (8-pin)	Fiberoptic	Miniribbon (36-pin)	BNC	RJ-45 female (8-pin)	RJ-45 female (8-pin)
24 V current consumption	Typ 150 mA	Typ 200 mA	Typ 200 mA	Typ 120 mA	Typ 160 mA	Typ 160 mA
Protection class	IP20 according to EN60529, IEC 529					
Certification *						
• CE-marked	Yes	Yes	Yes	Yes	Yes	Yes
• UL 508	Yes	Yes	Yes	Yes	Yes	Yes
• UL 60079-15 (Class 1 Zone 2)	Yes	Yes	Yes	Yes	Yes	Yes
• RoHS compliance	DIRECTIVE/2011/65/EU (EN 50581:2012)					
• WEEE compliance	DIRECTIVE/2012/19/EU					
Dimensions	Width 58 x Height 186 x Depth 135 mm (2.3 x 7.3 x 5.3 in.)					
Weight (including base)	600 g (1.3 lbs)	700 g (1.5 lbs)	600 g (1.3 lbs)	600 g (1.3 lbs)	700 g (1.5 lbs)	700 g (1.5 lbs)

* For detailed information on each module, please visit: 800xahardwareselector.com

Supported Communication modules	AF100	PROFINET IO	EtherNet IP / DeviceNet	OPC UA Client Interface
Module	CI869	CI871A	CI873A	CI874
Protocol	Advant Fieldbus 100	PROFINET IO	EtherNet IP / DeviceNet (via LD800DN)	OPC UA Client
Master or slave	Slave	Master	Master	Master
Number of channels	2	1	1	1
Max units on CEX bus	4	12	4	12
Transmission speed	Up to 500 Kbit/s	10/100 Mbit/s	10/100 Mbit/s	10/100 Mbit/s
Cable redundancy	Yes	No	No	No
Module redundancy	Yes	Yes	No	Yes
Hot Swap	Yes	Yes	Yes	Yes
Used together with High Integrity Controller	Yes	Yes	Yes	Yes
Connectors	Phoenix (4-pin)	RJ-45 female (8-pin)	RJ-45 female (8-pin)	RJ-45 female (8-pin)
24 V current consumption	Typ 160 mA	Typ 160 mA	Typ 160 mA	Typ 160 mA
Protection class	IP20 according to EN60529, IEC 529			
UL 508	Yes	Yes	Yes	Yes
UL 60079-15 (Class 1 Zone 2)	Yes	Yes	Yes	Yes
Hazardous location	–	UL 60079-15, cULus Class 1, Zone 2, AEx nA IIC T4, ExnA IIC T4Gc X (UL pending)	UL 60079-15, cULus Class 1, Zone 2, AEx nA IIC T4, ExnA IIC T4Gc X (UL pending)	UL 60079-15, cULus Class 1, Zone 2, AEx nA IIC T4, ExnA IIC T4Gc X (UL pending)
Dimensions	Width 58 x Height 186 x Depth 135 mm (2.3 x 7.3 x 5.3 in.)			
Weight (including base)	700 g (1.5 lbs)	700 g (1.5 lbs)	700 g (1.5 lbs)	700 g (1.5 lbs) Features

Features	BC810	BC820
Article number	3BSE031155R1	3BSE071500R1
Redundancy	Yes	Yes
High Integrity	Yes	No
Performance	Hot swap supported	Hot swap supported
Power supply	Inputs designated L+ and L- 24 V nominal, variation between 19.2 V DC and 30 V DC.	
Power consumption +24 V typ/max	50 mA typical (70 mA max)	120 mA typical (200 mA max)
Power dissipation typ.	1.2 W typical	2.9 W typical
Temperature, Operating	+5 to +55 °C (+41 to +131 °F)	
Temperature, Storage	-40 to +70 °C (-40 to +158 °F)	
Relative humidity	5 to 95 %, non-condensing	
Protection class	IP20 according to EN60529, IEC 529	
CE- marking	Yes	
Electrical Safety	UL508	UL508
Hazardous location	cULus Class 1, Zone 2, AEx nA IIC T4, ExnA IIC T4Gc X	
Marine certificates	ABS, BV, DNV-GL, LR	ABS, BV, DNV-GL, LR
RoHS compliance	DIRECTIVE/2011/65/EU (EN 50581:2012)	
WEEE compliance	DIRECTIVE/2012/19/EU	
Height	185 mm (7.3 in.)	185 mm (7.3 in.)
Width	59 mm (2.9 in.)	59 mm (2.9 in.)
Depth	127.5 (5.0 in.)	127.5 (5.0 in.)
Weight	1.5 kg (3.31 lbs) (BC810K02 package)	1.4 kg (3.1 lbs) (BC820K02 package)

Communication

Serial Communication Interface

Serial Communication Interface		Article no.
RS232-C interfaces for protocols COMLI, MODBUS, Siemens 3964R, the free-programmable serial protocol etc.		
	CI853K01 Dual RS232-C interface For Modbus RTU and COMLI Package including: • CI853, Communication Interface • TP853, Baseplate, width = 60 mm	3BSE018103R1

Communication

MODBUS TCP

MODBUS TCP		Article no.
	CI867AK01 Modbus TCP Interface Package including: • CI867A, Communication Interface • TP867, Baseplate The CI867A are only using one Ethernet port (100 Mbit/s) compared with the earlier CI867. CI867A is only compatible with 800xA 6.0.3.3 and 6.1.1, Compact Control Builder 6.0.0-3 and 800xA 6.1.1, and onwards.	3BSE092689R1

Communication

PROFIBUS DP

PROFIBUS DP		Article no.
The required PROFIBUS network components (Linking Devices, etc.) must be ordered from price list, PROFIBUS Network Components.		
	CI854BK01 PROFIBUS-DP/V1 Interface Package including: • CI854B, Communication Interface • TP854, Baseplate, width = 60 mm	3BSE069449R1

Communication

PROFINET IO

PROFINET IO		Article no.
	CI871AK01 PROFINET IO Communication Interface Package including: • CI871A, Communication Interface • TP867, Baseplate Only compatible with 800xA 6.0.3.3 and 6.1.1, Compact Control Builder 6.0.0-3 and 6.1.1, and onwards. 6.0.0-3 and 6.1.1, and onwards.	3BSE092693R1

Communication

FOUNDATION Fieldbus

FOUNDATION Fieldbus		Article no.
The required FOUNDATION Fieldbus network components (Linking devices, etc.) must be ordered from price list, FOUNDATION Fieldbus Network Components.		
	CI860K01 FF HSE Interface FOUNDATION Fieldbus HSE interface Package including: • CI860, Communication Interface • TP860, Baseplate, width = 60 mm	3BSE032444R1

Communication

IEC 61850

In order to develop the IEC 61850 configuration in projects, for example creating and editing Substation Configuration Description (SCD) files, one must purchase the IEC 61850 Engineering Tool. The IEC 61850 Engineering Tool is licensed separately from System 800xA licenses, and one license can be used in several projects.

Please refer to Ref. Doc 2PAA113852 for more details on how to purchase and license it. For order of IEC 61850 related products, local organizations must comply with the Demands on the Purchaser to secure successful sales of IEC 61850 with System 800xA. Ref doc, 3BSE058798.

IEC 61850		Article no.
	CI868AK01 IEC 61850 Interface Package including: • CI868A, Communication Interface • TP867, Baseplate Only compatible with 800xA 6.0.3.3 and 6.1.1, Compact Control Builder 6.0.0-3 and 6.1.1, and onwards. 6.0.0-3 and 6.1.1, and onwards.	3BSE092691R1

Communication

Ethernet/IP

Ethernet/IP		Article no.
	CI873AK01 Ethernet/IP Interface Packaging including: • CI873A, Communication Interface • TP867, Baseplate Only compatible with 800xA 6.0.3.3 and 6.1.1, Compact Control Builder 6.0.0-3 and 6.1.1, and onwards.	3BSE092695R1

Communication

OPC UA

OPC UA		Article no.
	CI874K01 OPC UA Client Interface OPC UA Communication Interface Package including:	3BSE090784R1
	• CI874, Communication Interface • TP867, Baseplate Only compatible with 800xA 6.1.1, Compact Control Builder 6.1.1, and onwards.	

Communication

Advant Fieldbus 100

Advant Fieldbus 100		Article no.
	CI869K01 AF 100 Communication Interface Package including:	3BSE049110R1
	• CI869, Communication Interface • TP869, Baseplate, width = 60 mm Note! This part is exempted from the scope of 2011/65/EU (RoHS) as provided in Article 2(4)(c),(e),(f)and(j)therein(ref.: 3BSE087241 – Technical Overview - ABB Advant Master Process Control System)	

Communication

MasterBus 300

MasterBus 300		Article no.
	CI855K01 MB 300 interface Package including:	3BSE018106R1
	• CI855, MB300 Interface Module • TP853, Base plate	

Communication

S100 I/O Bus

S100 I/O Bus		Article no.
	CI856K01 S100 I/O interface Communication between AC 800M and S100 I/O system. Package including:	3BSE026055R1
	• CI856, Communication Interface • TP856, Baseplate, width = 60 mm	

Communication

Satt I/O

Satt I/O	Article no.
For SATT 19" rack I/O and S200 I/O via ControlNet. For additional Satt 19" rack I/O components, see price list 3BSE014353 (Interface) in price book 3BSE014360 (SattLine/SattCon).	
	CI865K01 SATT I/O Interface Package including: • CI865, Communication Interface • TP865, Baseplate 3BSE040795R1

Communication

INSUM

INSUM	Article no.
	CI857K01 INSUM Ethernet interface Package including: • CI857, Communication Interface • TP853, Baseplate, width = 60 mm 3BSE018144R1

Communication

DriveBus

DriveBus	Article no.
	CI858K01 DriveBus Interface Package including: • CI858, Communication Interface • TP858, Baseplate, width = 60 mm 3BSE018135R1

Communication

Bus Accessories

Bus Accessories		Article no.
	TK850V007 CEX-Bus Extension Cable Length = 0.7 m Use of TK850V007 needs TK851 as CEX-bus terminator.	3BSC950192R1
	TB850 CEX-Bus Terminator With 25-pin DB25P male connector. With screw fixing. A TB850 CEX-Bus terminator must always be installed on the last unit on the CEX-Bus.	3BSC950193R1
	TB851 CEX-Bus Terminator When Communication Interface units are mounted on adjacent DIN rails, they are connected by means of a CEX-Bus extension cable (TK850) and terminated using a TB851 CEX-Bus terminator. With 25-pin DB25S female connector. With screw fixing.	3BSC950194R1
	BC810K02 CEX-Bus Interconnection Unit Including: • 2 pcs BC810, Interconnection Unit • 2 pcs TP857, Baseplate, width = 60 mm • TK851, Interconnection Cable • 2 pcs TB850, CEX-Bus Terminator	3BSE031155R1
	BC820K02 CEX-Bus Interconnection Unit Allows AC 800M redundant PM858, PM862, PM866 and PM866A pair to be up to 200 m apart, cables not included. Including: • 2 pcs BC820 CEX-Bus Interconnection Unit • 2 pcs TP850, Baseplate, width = 60 mm • 2 pcs TK857 RCU-Link Cable for BC820 • 2 pcs TB850, CEX-Bus Terminator	3BSE071500R1
	TK851V010 Connection Cable Length = 1.0 m. Used as: • RCU Link Cable • BC810 Interconnection Cable	3BSC950262R1
	TB852 RCU Link Terminator Terminator for RCU link.	3BSC950263R1
	TB853 RCU Control Link Terminator Terminator for RCU Control link.	3BSE057022R1
	TK855 RCU Data Link Cable Length = 1.0 m. Used as: RCU Data Link Cable with PM891.	3BSC950356R1
	TK856 RCU Control Link Cable Length = 1.0 m. Used as RCU Control Link Cable with PM891.	3BSE057021R1
	TK857V003 RCU Link Cable Length = 0.3 m. Used with BC820.	3BSC950375R1

AC 800M Processor Units

AC 800M Mounting Rails

AC 800M Mounting Rails		Article no.
	AI-profile with DIN Rail, C. Duct, 28,3" Mounting 719 mm (28,3") DIN rail length 683 mm (26,9")	3BSE022257R1
	AI-profile with DIN Rail, C. Duct, 24" Mounting 592 mm (24") DIN rail length 556 mm (21,9")	3BSE022256R1
	AI-profile with DIN Rail, C. Duct, 19" Mounting 465 mm (19") DIN rail length 429 mm (16,9")	3BSE022255R1

Select I/O

Select I/O is an Ethernet networked, single channel granular I/O system for the ABB Ability™ System 800xA automation platform. Select I/O helps decouple project tasks, minimizes the impact of late changes and supports standardization of I/O cabinetry ensuring automation projects are delivered on-time and under budget.




Select I/O selection guide


	Signal Type	Signal Range	HART	SOE	Galvanic Isolation	Loop Supervision	Current Limitation	CE	ATEX Zone 2	cULus Class I Division 2	High Integrity SIL 3
AIS810	Analog In	4...20 mA	•		ch-2-ch	•	•	•	•	Yes	
AIS815	Analog In	4...20 mA, 1.2 A	•		Group	•	•	•	•	Yes	
AIS830	Analog In	RTD/TC/mV			ch-2-ch	•	•	•	•	Pending	
AIS850	Analog In IS	4...20 mA	•		ch-2-ch	•	•	•	•	On IPA	
AIS880	Analog In	4...20 mA	•		ch-2-ch	•	•	•	•	Yes	•
AIS885	Analog In IS	4...20 mA, 1.2 A	•		Group	•	•	•	•	On IPA	•
AIS890	Analog In IS	4...20 mA	•		ch-2-ch	•	•	•	•	On IPA	•
DIS801	Digital In	24 V		•	ch-2-ch	•	•	•	•	Pending	
DIS810	Digital In	24 V		•	ch-2-ch	•	•	•	•	Yes	
DIS820	Digital In	120 V		•	ch-2-ch		•	•			
DIS821	Digital In	230 V		•	ch-2-ch		•	•			
DIS850	Digital In IS	NAMUR		•	ch-2-ch	•	•	•	•	On IPA	
DIS880	Digital In	24 V		•	ch-2-ch	•	•	•	•	Yes	•
DIS890	Digital In IS	NAMUR		•	ch-2-ch	•	•	•	•	On IPA	•
AOS810	Analog Out	4...20 mA	•		ch-2-ch	•	•	•	•	Yes	
AOS850	Analog Out IS	4...20 mA	•		ch-2-ch	•	•	•	•	On IPA	
AOS880	Analog Out	4...20 mA	•		ch-2-ch	•	•	•	•	Yes	•
DOS801	Digital Out	24 V, 0.6 A			ch-2-ch	•	•	•	•	Pending	
DOS810	Digital Out	24 V, 0.6 A			ch-2-ch	•	•	•	•	Yes	
DOS820	Digital Out	Relay NO			ch-2-ch		•	•	•	Yes	
DOS880	Digital Out	24 V, 0.6 A			Group	•	•	•	•	Yes	•
DOS885	Digital Out	24 V, 3 A			Group	•	•	•	•	Yes	•
GTS810	N/A	N/A			N/A	N/A	N/A	•	•	On IPA	
GIS810	GIO	N/A			N/A	N/A	N/A	•	•	Yes	
GIS880	GIO	N/A			N/A	N/A	N/A	•	•	Yes	•

For detailed information on each Select I/O module, please visit: 800xahardwareselector.com

Measurements

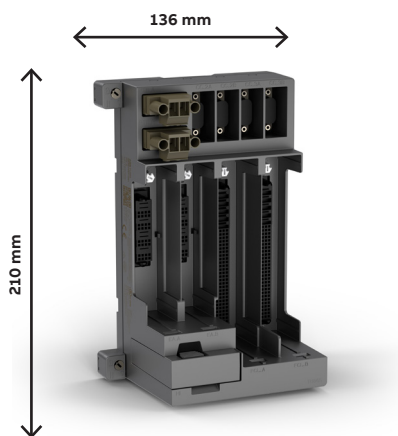

TU865 Ethernet FCI MTU

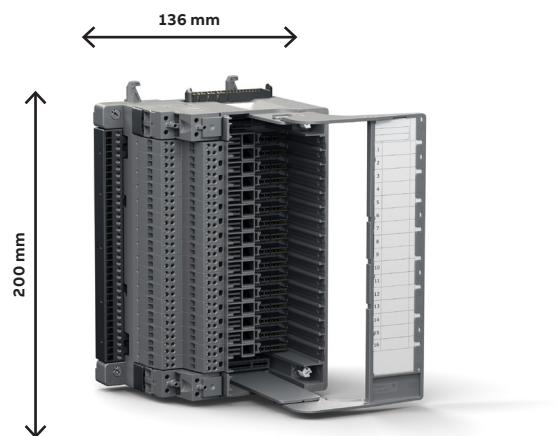

TUS810 Select I/O MTU

Select I/O

Extended warranty for Select I/O Hardware

We can offer an extended warranty for one, two, three or four years in addition to normal warranty conditions for Select I/O Hardware. See price list Extended Warranty Time

ISA-S71.04 level G3 compliance

Modules are compliant to ISA-S71.04 level G3, unless explicitly stated differently.

Communication

Field Communication Interface

Field Communication Interface		Article no.
    	CI845 Ethernet FCI module Ethernet Fieldbus Communication Interface Module for connection of S800 I/O or Select I/O to Ethernet. For redundant configuration two Fieldbus Communication Interfaces CI845, two Ethernet Adapters TC810 and one TU860 or one TU865 are needed. For Select I/O High Integrity SIL3 one HI880 is needed.	3BSE075853R1
	TU865 MTU for Ethernet FCI and Select IO Ethernet Fieldbus Communication Interface Module Termination Unit for connection of single or redundant Select I/O. Supports single or redundant Ethernet Fieldbus Communication Interface Module, single or redundant Ethernet Adapter and High Integrity Module. Mounting on vertical DIN-rail. Including: 1 pcs TL814K01 Empty slot protector HI Module	3BSE078712R1
	TC810 Ethernet Adapter for Ethernet FCI Ethernet Adapter for copper media with built in 2-port switch. Hosts two RJ45 ports. Use as single or redundant.	3BSE076220R1
	TC811 Ethernet Adapter Single Mode Fiber Ethernet Adapter for single mode fiber with built in 2-port switch. Hosts two LC ports. Use as single or redundant.	3BSE078714R1
	HI880 HI Module for Ethernet FCI High Integrity Module enables High Integrity SIL3 communication with the Select I/O.	3BSE078701R1

Select I/O Modules

I/O Modules

I/O Modules		Article no.
	GIS810 Generic I/O Module Generic I/O Module. Use as single or redundant.	3BSE078740R1
	AIS810 Analog Input 4 to 20 mA Analog Input Signal Conditioning Module for 2/4-wire devices. 16 bit. HART communication.	3BSE078762R1
	AIS815 Analog Input 4 to 20 mA, 1.2 A Analog Input Signal Conditioning Module for 2/3/4-wire devices. 16 bit. HART communication. 1.2 A field power.	2PAA123602R1
	AIS830 Analog Input RTD/TC/mV Analog Input signal Condition Module RTD/TC/mV for 2/3/4-wire devices.	2PAA123605R1
	AIS850 Analog input IS 4 to 20 mA Analog Input Intrinsically Safe Signal Conditioning Module for 2-wire devices. 16 bit. HART communication.	3BSE078770R1
	AOS810 Analog Output 4 to 20 mA Analog Output Signal Conditioning Module for 2-wire devices. 16 bit. HART communication.	3BSE078764R1
	AOS850 Analog Output IS 4 to 20 mA Analog Output Intrinsically Safe Signal Conditioning Module for 2-wire devices. 16 bit. HART communication.	3BSE078772R1
	DIS801 Digital Input 24 V Digital Input 24 V Signal Conditioning Module for 2/3/4-wire devices. Sequence of Events (SOE) enabled.	2PAA123603R1

Select I/O Modules

I/O Modules		Article no.
	DIS810 Digital Input 24 V Digital Input 24 V Signal Conditioning Module for 2/3/4-wire devices. Sequence of Events (SOE) enabled.	3BSE078766R1
	DIS820 Digital Input 120 V Digital Input 120 V Signal Conditioning Module for 2/3/4-wire devices. Sequence of Events (SOE) enabled.	2PAA1123607R1
	DIS821 Digital Input 230 V Digital Input 230 V Signal Conditioning Module for 2/3/4-wire devices. Sequence of Events (SOE) enabled..	2PAA123608R1
	DIS850 Digital Input IS Digital Input Intrinsically Safe (Zone 0) Signal Conditioning Module for 2-wire NAMUR field devices. Sequence of Events	3BSE078774R1
	DOS801 Digital Output 24 V, 0.6 A Digital Output 24 V 0.6 A Signal Conditioning Module supporting 2-wire devices.	2PAA123604R1
	DOS810 Digital Output 24 V 0.6 A Digital Output 24 V 0.6 A Signal Conditioning Module supporting 2-wire devices.	3BSE078768R1
	DOS820 Digital Output Relay NO Digital Output Relay Normally Open Signal Conditioning Module for wire devices. 5-125 V DC, 5-250 V AC, up to 3A.	2PAA123606R1
	FS810 Grounding Termination Module Provides Ground Termination alternative for field wires associated with single Field Termination Block (FTB).	3BSE093006R1
	GFS810 Ground Fault Detection Module Ground Fault Detection Module, Haz Loc	3BSE093005R1

Select I/O Modules

High Integrity I/O Modules

High Integrity I/O Modules		Article no.
	The modules can only be connected to an AC 800M controller PM857, PM863 or PM867 via CI845.	
	GIS880 Generic I/O Module High Integrity Generic I/O Module High Integrity. Certified for SIL3. Use as single or redundant.	3BSE075855R1
	AIS880 Analog Input 4 to 20 mA HI Analog Input Signal Conditioning Module High Integrity for 2/4-wire devices. 16 bit. HART communication. Certified for SIL3.	3BSE074053R1
	AIS885 Analog Input IS 4 to 20 mA HI 1.2 A Analog Input Signal Conditioning Module High Integrity for 2/3/4-wire devices. 16 bit. HART communication. 1.2 A field power. Certified for SIL3.	3BSE080108R1
	AIS890 Analog Input IS 4 to 20 mA HI Analog Input Intrinsically Safe Signal Conditioning Module High Integrity for 2-wire devices. 16 bit. HART communication. Certified for SIL3.	3BSE074063R1
	AOS880 Analog Output 4 to 20 mA HI Analog Output Signal Conditioning Module High Integrity for 2-wire devices. 16 bit. HART communication. Certified for SIL3.	3BSE074055R1
	DIS880 Digital Input 24 V HI Digital Input 24 V Signal Conditioning Module High Integrity for 2/3/4-wire devices. Sequence of Events (SOE) enabled. Certified for SIL3.	3BSE074057R1
	DIS890 Digital Input IS HI Digital Input Intrinsically Safe Signal Conditioning Module High Integrity for 2-wire devices. Sequence of Events (SOE) enabled. Certified for SIL3.	3BSE077763R1
	DOS880 Digital Output 24 V 0.6 A HI Digital Output 24 V 0.6 A Signal Conditioning Module High Integrity. Certified for SIL3.	3BSE074059R1
	DOS885 Digital Output 24 V 3 A HI Digital Output 24 V 3 A Signal Conditioning Module High Integrity. Certified for SIL3.	3BSE074061R1

Select I/O Modules

Module Termination Units

Module Termination Units	Article no.
 TUS810K01 MTU for Select I/O Select I/O Module Termination Unit TUS810K01 includes 1 ps TUS810, 16 ps FTB810 Field Terminal Blocks, 2 ps PTB810 Power Injection Terminal Blocks and 1ps TUC810 Terminal Cover. Mounting on vertical DIN-rail.	3BSE083204R1
 TUS810K02 MTU for Select I/O IS Select I/O Module Termination Unit IS TUS810K02 includes 1ps TUS810, 16ps FTB890 Field Terminal Blocks, 2ps TL820 Empty Slot Protectors and 1ps TUC810 Terminal Cover. Mounting on vertical DIN-rail.	3BSE093004R1
 TUS810K03 MTU for Select I/O 120/230 V Select I/O Module Termination Unit TUS810K03 120/230 V includes 1ps TUS810, 16ps FTB820 Field Terminal Blocks, 2ps PTB820 Power Injection Blocks and 1ps TUC810 Terminal Cover. Mounting on vertical DIN-rail.	2PAA125364R1
 GTB810 Grounding Terminal Bar Grounding Terminal Bar with 34 screw terminals for the Select I/O Module Termination Unit. Used to ground shields and spare cores.	3BSE078722R1
 FTB810K01 Field Terminal Block 4-wire Field Terminal Block with screws for the Select I/O Module Termination Unit. 10 pieces per package.	3BSE088180R1
 FTB820K01 Field Terminal Block 120/230 V 4-wire Field Terminal Block 120/230 V with screws for the Select I/O Module Termination Unit. 10 pieces per package.	2PAA1253661
 FTB890K01 Field Terminal Block IS 4-wire Intrinsically Safe Field Terminal Block with screws for the Select I/O Module Termination Unit. 10 pieces per package.	3BSE092175R1
 FTB840K01 Redundant Field Terminal Block Redundant 4-wire Field Terminal Block with screws for the Select I/O Module Termination Unit. 10 pieces per package.	3BSE093007R1
 PTB810K01 Power Injection Terminal Block Power Injection Terminal Block with screws for the Select I/O Module Termination Unit. 10 pieces per package.	3BSE088182R1
 PTB820K01 Power Injection Terminal Block 120/230 V Power Injection Terminal Block 120/230 V with screws for the Select I/O Module Termination Unit. 10 pieces per package.	2PAA125365R1
 TUC810K01 Terminal Cover Terminal Cover which holds user labels for the Select I/O Module Termination Unit. 10 pieces per package.	3BSE088181R1
 TS810K01 Screw Lugs Screw lugs for TU860/TU865 and TUS810. 100 pieces per package.	3BSE090351R1
 TUS810K01 Separation wall IS and non-IS Separation wall between Intrinsically Safe and non Intrinsically Safe Select I/O Module Termination Units. 10 pieces per package.	3BSE093009R1
 TL820K01 Empty slot protector power inj Empty slot protector for a Power Injection Terminal Block slot on the Select I/O Module Termination Unit. 10 pieces per package.	3BSE093010R1
 TL830K01 Cover for power inlets on TU86x IP30 protection for power inlets on FCI base plate TU865/TU860. 20 pieces of TL830 and 10 pieces of TL831 per package.	3BSE093013R1

Select I/O Modules

ModuleBus Communication Parts

ModuleBus Communication Parts		Article no.
 	TB868 Modulebus Terminator One Modulebus Terminator is needed per cluster.	3BSE088162R1
	TB861V009 Compact Modulebus Extension Extends the Modulebus from one DIN-rail to another. Length 0.9 m.	3BSE088163R1
	TB861V011 Compact Modulebus Extension Extends the Modulebus from one DIN-rail to another. Length 1.1 m.	3BSE090352R1
	TB861V015 Compact Modulebus Extension Extends the Modulebus from one DIN-rail to another. Length 1.5 m.	3BSE088164R1

Select I/O Modules

Empty Slot Protectors

Empty Slot Protectors		Article no.
    	TL810K01 Empty slot protector for FCI Empty slot protector for a Fieldbus Communication Interface slot on the Ethernet FCI Module Termination Unit. 10 pieces per package.	3BSE088170R1
	TL811K01 Empty slot protector for EA Empty slot protector for a Ethernet Adapter slot on the Ethernet FCI Module Termination Unit. 10 pieces per package.	3BSE088171R1
	TL812K01 Empty slot protector for GIO Empty slot protector for a Generic I/O Module slot on the Select I/O Module Termination Unit. 10 pieces per package.	3BSE088172R1
	TL813K01 Empty slot protector for SCM Empty slot protector for a Signal Conditioning Module slot on the Select I/O Module Termination Unit. 10 pieces per package.	3BSE088173R1
	TL814K01 Empty slot protector HI Module Empty slot protector for a High Integrity Module slot on the Ethernet FCI Module Termination Unit. 10 pieces per package.	3BSE088174R1

S800 I/O Modules

S800 I/O is a comprehensive and modular process I/O system that communicates with parent controllers either direct connected using the Modulebus or over industry-standard field buses. Thanks to its broad connectivity it fits a wide range of process controllers from ABB and others.

By permitting installation in the field, close to sensors and actuators, S800 I/O reduces the installation cost by reducing the cost of cabling. And thanks to features such as hot swap of modules, on-line reconfiguration and redundancy options, it contributes to keeping production – and thereby profits up.


S800 I/O features include:

- Comprehensive coverage
- Flexible configuration and installation
- Ease of set up
- Reliability and accuracy

- HART pass-through
- Redundancy also on I/O module level
- High Integrity I/O modules certified to SIL3
- High accuracy time tagging
- Defined outputs at communication errors
- I/O modules with Intrinsic Safety interfaces

With its cost-effective design and just 59 mm depth installation, S800L I/O modules are the perfect choice for PLC applications. Robust mechanics, one-piece handling, easy mounting and smart connections save your time in all phases of installation.

The comprehensive S800 I/O system consists of more than 40 different module types to respond to every need. Classification of corrosive protection, electrical safety, hazardous location and marine certification brings the possibility to install S800 I/O in a wide variety of applications. S800 I/O is installed with more than 50 million channels worldwide.

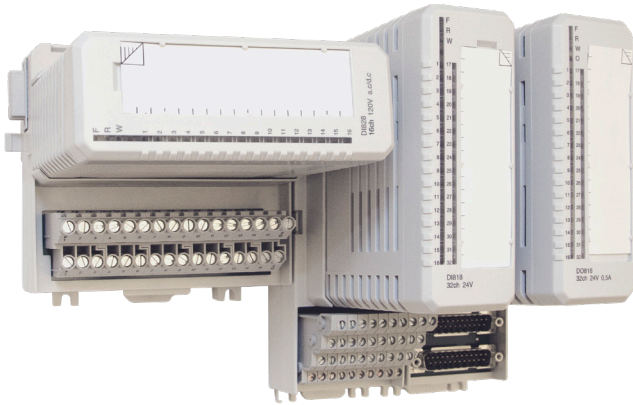



S800L I/O



S800 I/O



S800 HI I/O

S800 I/O Modules

Digital input modules	
DI810	16 channels, 2 groups of 8 channels, 24 V d.c., current sink.
DI811	16 channels, 2 groups of 8 channels, 48 V d.c., current sink.
DI814	16 channels, 2 groups of 8 channels, 24 V d.c., current source.
DI818	32 channels, 2 groups of 16 channels, 24 V d.c., current sink.
DI820	8 channels, separate returns, 110 V d.c., 120 V a.c.
DI821	8 channels, separate returns, 220 V d.c., 230 V a.c.
DI825	With time tagging, 8 channels, separate returns, 125 V d.c.
DI828	16 channels, separate returns, 110 V d.c., 120 V a.c. / d.c.
DI830	With time tagging. 16 channels, 2 groups of 8 channels, 24 V d.c., current sink. Resolution: < 0.5 ms.
DI831	With time tagging. 16 channels, 2 groups of 8 channels, 48 V d.c., current sink. Resolution: < 0.5 ms.
Pulse input module	
DP820	2 channels, separate returns, 0.25 Hz - 1.5 MHz, signal voltage: 5 / 12 V d.c.
DP840	8 channels, extended diagnostics, wire-fault detection, current limited sensor supply, 0.5-20 kHz, 12/24 V d.c or NAMUR, common return.
Digital output modules	
DO810	16 channels, 2 groups of 8 channels, 24 V d.c., max 0.5 A d.c., transistor, current source, short-circuit-proof.
DO814	16 channels, 2 groups of 8 channels, 24 V d.c., max 0.5 A, transistor, current sink, short-circuit-proof.
DO815	8 channels, 2 groups of 4 channels, 24 V d.c., max 2 A, transistor, current source, short-circuit-proof, wire-fault detection.
DO818	32 channels, 2 groups of 16 channels, 24 V, max 0.5 A d.c., transistor, current source, short-circuit-proof
DO820	8 channels, separate returns, 5-250 V, max 3 A a.c./d.c., relay (N.O.).
DO821	8 channels, separate returns, 5-250 V, max 3 A a.c./d.c., relay (N.C.).
DO828	16 channels, separate returns, 5-250V a.c. / 5-125V d.c. max 2A a.c./d.c., relay (N.O.).
Analog input modules	
AI810	8 channels, single-ended, 0(4)-20 mA, 0(2)-10 V, 12 bits.
AI815	8 channels with HART. 0(4)..20 mA, 0(1)..5 V, 12 bit, single ended, current limited transmitter supply.
AI820	Differential inputs, 4 channels, 0(1)-5 V, $\pm 0(2)$ -10 V, $\pm 0(4)$ -20 mA, 14 bits + sign.
AI825	Individually galvanically isolated channels, 4 channels, $\pm 0(2)$ -10 V, $\pm 0(4)$ -20 mA, 14 bits + sign.
AI830A	RTD inputs, 8 channels, Pt100, Ni100, Ni120, Cu10, resistor 0-400 ohms, 14 bits, 3-wire.
AI835A	TC inputs, 8 channels, (7+ ref. junction), separate returns. TC types B, C, D, E, J, K, L, N, R, S, T, U, -30...75 mV, 15 bits.
Analog output modules	
AO810V2	8 channels, common return, 0(4)-20 mA, 14 bits, load: 850 ohms (short-circuit-proof).
AO815	8 channels with HART. 4..20 mA, 12 bit, load: 750 ohms, common return, short-circuit-proof.
AO820	4 channels, individually galvanically isolated, separate returns, measuring range: $\pm 0(2)$ -10 V, $\pm 0(4)$ -20 mA, resolution: 12 bits + sign, load: 500 ohms (current) / 5 kohms (voltage), short-circuit-proof.
Intrinsic-safety modules	
DI890	8 channels, separate returns, proximity sensors (NAMUR) or voltage-free contact., current sink, wire-fault detection.
DO890	4 channels, separate returns, load 150-5000 ohms, 11 V @ 40 mA, current source, wire-fault detection, short circuit-proof.
AI890	8 channels, single-ended, 0(4)-20 mA, 12 bits, transmitter power supply.
AI893	8 channels, TC: 7 + ref. junction, sep. returns. TC types B, C, E, J, K, L, N, R, S, T, U, -10...80 mV. RTD: Pt50-1000, Ni100-500, Cu10-100, resistor 0-4000 W, 3-wire. 15 bits + sign.
AI895	8 channels, single-ended, 4-20 mA, 12 bits, transmitter power supply, HART pass-through.
AO890	8 channels, common return, 0(4)-20 mA, 12 bits, load: 725 ohms short-circuit-proof.
AO895	8 channels, common return, 4-20 mA, 12 bits, load: 725 ohms short-circuit-proof, HART pass-through.
Redundant modules	
DI840	16 channels, common return, 24 V d.c., current sink, extended diagnostics, time-tagging, current limited sensor supply.
DP840	8 channels, common return, 0.5-20 kHz, 12/24 V d.c or NAMUR, extended diagnostics, wire-fault detection.
DO840	16 channels, common return, 24 V d.c., max. 0.5 A, transistor, current source, short-circuit-proof, extended diagnostics.
AI843	TC input, 8 channels + ref. junction. TC types: B, C, E, J, K, L, N, R, S, T, U, -30...75 mV, 16 bits, extended diagnostics.
AI845	8 channels, 12 bits, 0(4)-20 mA 0(1)-5 V, extended diagnostics, HART pass-through, current limited transmitter supply, single ended.
AO845A	8 channels, 12 bits, common return, 4-20 mA, extended diagnostics, HART pass-through, 750 ohms.
Redundant modules – HI Integrity	
AI880A	8 channels with HART, 0(4)-20 mA, 12 bits, SIL3, current limited transmitter power.
DI880	16 channels, 24V d.c, SIL3, current limited sensor power, time-tagging.
DO880	16 channel, 24 V d.c., 0.5 A, SIL3, Current sourcing, current limiting


S800L I/O Modules

S800L modules	
DI801	16 channels, 1 group, 24 V d.c., current sink.
DI802	8 channels, 110 V d.c., 150 V a.c.
DI803	8 channels, 220 V d.c., 230 V a.c.
DO801	16 channels, common return, 24 V, max 0.5 A d.c., transistor, current source, short-circuit-proof.
DO802	8 channels, 5-250 V, max 2 A a.c./d.c., relay (N.O.).
AI801	8 channels, single-ended, 0(4)-20 mA, 12 bits.
AO801	8 channels, common return, 0(4)-20 mA, 12 bits, load: less than 750 ohms.
Accessories	
TU805K01	For DI801 & DO801. 2 and 3-wire connections of process signals. With field power distribution screw terminals.


Environmental Data for S800 I/O*	
Climatic Operating Conditions	+5 to +55 °C (Storage -40 to +70 °C, RH = 5 to 95 % no condensation, IEC/EN 61131-2)
Protection class	IP20 according to EN 60529, IEC 529
Corrosive protection	G3 compliant according to ISA-71.04
Electromagnetic Compatibility	Meets EMC directive 2004/108/EC according to EN 61000-6-2 and EN 61000-6-4
Electromagnetic Emission	Tested according to EN 61000-6-4 EMC – Generic Emission Standard, Part 2 – Industrial Environment
Electromagnetic Immunity	Tested according to EN 61000-6-2 EMC – Generic Immunity Standard, Part 2 – Industrial Environment
Electrical Safety	UL508, IEC/EN 61131-2
Hazardous Classified Locations	C1 Div 2 cULus, C1 Zone 2 cULus, ATEX Zone 2
Safety Integrity (IEC 61508)	PM857/SM812, PM863/SM812, PM867/SM812, AI880A, DI880, DO880: IEC 61508 up to SIL3
CE mark	Yes
RoHS compliance	EN 50581:2012
WEEE compliance	DIRECTIVE/2012/19/EU

* For detailed information on each module, please visit: 800xAHardwareselector.com


Measurements

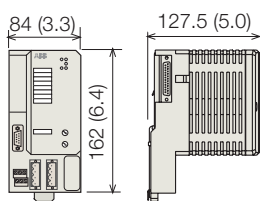


CI810




CI820, TB815

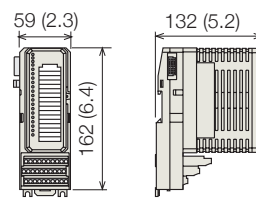


Compact I/O

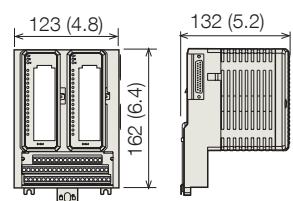


Redundant I/O

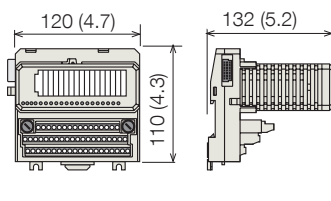


Extended I/O



CI801, S801L I/O

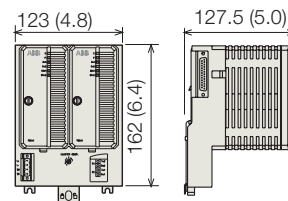

Redundant Comm. modules I/O

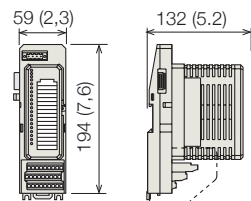

Intrinsic safety I/O

Dimensions in mm (in.)

S800 I/O modules selection guide

	NAMUR inputs	Binary 24 V	Binary 48 V	Binary 110 V	Binary 230 V	Binary Relay	Analog Unipolar	Analog Bipolar	Temperature RTD	Temperature T/C	SOE	HART	Intrinsic safety	Redundant	High integrity
I/O Features S800															
Digital input modules															
DI810		•													
DI811			•												
DI814		•													
DI818		•													
DI820				•											
DI821					•										
DI825				•							•				
DI828				•											
DI830		•									•				
DI831			•								•				
DI840		•									•			•	
DI880		•									•			•	•
DI890	•												•		
Digital output modules															
DO810		•													
DO814		•													
DO815		•													
DO818		•													
DO820						•									
DO821						•									
DO828						•									
DO840		•												•	
DO880		•												•	•
DO890													•		
Pulse input modules															
DP820		•													
DP840	•	•												•	
Analog input modules															
AI810							•								
AI815							•					•			
AI820								•							
AI825								•							
AI830A									•						
AI835A										•					
AI843										•				•	
AI845							•					•		•	
AI880A							•					•		•	•
AI890							•						•		
AI893									•	•			•		
AI895							•					•	•		
Analog output modules															
AO810V2							•								
AO815							•					•			
AO820								•							
AO845A							•					•		•	
AO890							•						•		
AO895							•					•	•		
S800L modules															
DI801		•													
DI802				•											
DI803					•										
DO801		•													
DO802						•									
AI801							•								
AO801							•								

S800 I/O Communication interfaces

Feature	CI801	CI840A	CI845	TC810	TC811
Article number	3BSE022366R1	3BSE041882R1	3BSE075853R1	3BSE076220R1	3BSE078714R1
Functionw	PROFIBUS-DPV1 fieldbus communication interface. Supervisory functions of I/O ModuleBus. Isolated power supply to I/O modules. OSP handling and configuration. Input power fused. Hot Configuration In Run. HART pass-through.	PROFIBUS-DPV1 fieldbus communication interface. Supervisory functions of I/O ModuleBus. Isolated power supply to I/O modules. OSP handling and configuration. Input power fused. Power supply supervision. Hot Configuration In Run. HART pass-through.	Ethernet fieldbus communication interface. Supervisory functions of I/O ModuleBus. Isolated power supply to I/O modules. OSP handling and configuration. Single/redundant 24V power supply with built-in voting and power supply supervision. Hot Configuration In Run. HART pass-through and Sequence of Events. Use as single or redundant, together with TC810 or TC811 and TU860.	Ethernet Adapter for copper media with built in 2-port switch. Hosts two RJ45 ports. Use as single or redundant, together with CI845 and TU860. Supports both Select I/O and S800 on Ethernet.	Ethernet Adapter for single mode fiber with built in 2-port switch. Hosts two LC ports. Use as single or redundant, together with CI845 and TU860. Supports both Select I/O and S800 on Ethernet.W
Redundant	No	Yes	Yes	Yes	Yes
Power Input	24 V d.c. (19.2 - 30)	24 V d.c. (19.2 - 30)	24 V d.c. (19.2 - 30)	24 V d.c. (19.2 - 30)	24 V d.c. (19.2 - 30)
Power Input Fuse	2 AF	2 AF	2 AF	2 AF	2 AF
Power Consumption at 24 V d.c.	140 mA	190 mA	150 mA	60 mA	80 mA
Power Supply Monitoring Inputs	N/A	Max. input voltage: 30 V Min. input voltage for high level: 15 V. Max. input voltage for low level: 8 V			
Power Dissipation	5.4 W	7.7 W	5 W	0.8 W	2 W
Maximum Ambient Temperature	55°C (131°F) Horizontal mounted 40°C (104°F) Vertical mounted	55°C (131°F) Horizontal mounted 40°C (104°F) Vertical mounted	-40°C (-40°F) to +70°C (158°F)	-40°C (-40°F) to +70°C (158°F)	-40°C (-40°F) to +65°C (149°F)
Electrical ModuleBus	Maximum of 12 I/O modules	Maximum of 12 single I/O modules or 6 pairs of redundant I/O modules	Maximum of 12 single I/O modules or 12 pairs of redundant I/O modules	N/A	
Optical ModuleBus	Maximum of 7 I/O clusters via TB842	Maximum of 7 I/O clusters via TB842	N/A	N/A	
Max optical cable length	N/A	N/A	N/A	N/A	
Power Output - ModuleBus	24 V max. = 1.5 A fused ⁽¹⁾ 5 V max. = 1.5 A current lim.	24 V max. = 1.5 A current lim. 5 V max. = 1.5 A current lim.	24 V max. = 2x 1.5 A current lim. 5 V max. = 2x 1.5 A current lim.	N/A	
Module termination units	N/A	TU846 or TU847	TU860 or TU865	TU860 or TU865	
MTU Keying code	N/A	AA	A	A	B
Dielectric test voltage	500 V a.c.	500 V a.c.	500 V a.c.	500 V a.c.	
Rated insulation voltage	50 V	50 V	50 V	50 V	
Width	85.8 mm (3.38 in.)	54 mm (2.13 in.)	33 mm (1.18 in.)	25 mm (0.98 in.)/ 24.5 mm (0.96 in.)	
Depth	58.5 mm (2.30 in.)	96 mm (3.78 in.)	121.7 mm (4.79 in.)	76.3 mm (3.0 in.)/ 101.3 mm (3.99 in.)	
Height	136 mm (5.35 in.)	119 mm (4.69 in.)	135 mm (5.31 in.)	110 mm (4.33 in.)	
Weight	300 g (0.66 lbs.)	200 g (0.44 lbs.)	225 g (0.49 lbs.)	105 g (0.23 lbs.)/ 161 g (0.35 lbs)	
Climatic operating conditions	0 to +55 °C (Storage -25 to +70 °C), RH=5 to 95 % no condensation, IEC/EN 61131-2 ⁽²⁾		-40 to +70 °C (Storage -40 to +85 °C), RH=5 to 95 % no condensation, IEC/EN 61131-2 (TC811 operating temp. -40 to +65 °C)		
Certificates and standards ⁽³⁾	CE mark: Yes Electrical safety: IEC 61131-2, UL 508 Hazardous Location: C1 Div 2 cULus, C1 Zone 2 cULus, ATEX Zone 2 ^(c) Marine certification: ABS, BV, DNV-GL, LR (*) Corrosive atmosphere ISA-S71.04: G3 Pollution degree: Degree 2, IEC 60664-1		Mechanical operating conditions: IEC/EN 61131-2 EMC: EN 61000-6-4 and EN 61000-6-2 Overvoltage categories: IEC/EN 60664-1, EN 50178 Equipment class: Class I according to IEC 61140; (earth protected) RoHS compliance: DIRECTIVE/2011/65/EU (EN 50581:2012) WEEE compliance: DIRECTIVE/2012/19/EU		

Feature	TB820V2	TB825	TB826	TB840A	TB842
Article number	3BSE013208R1	3BSE036634R1	3BSE061637R1	3BSE037760R1	3BSE022464R1
Function	2 fiber optic ports to optical ModuleBus. ModuleBus (electrical) to the I/O Modules. Supervisory functions of I/O ModuleBus and power supply. Isolated power supply to I/O modules. Input power fused.	ModuleBus optical media converter from plastic or HCS fibre with versatile link connector to glass fibre with ST connector. Allows distribution of the optical ModuleBus up to 1000 m per cluster in star configurations.	ModuleBus optical media converter from plastic or HCS fibre with versatile link connector to glass fibre with SC connector. Allows distribution of the optical ModuleBus up to 5000 m per cluster in star configurations.	2 fiber optic ports to optical ModuleBus. ModuleBus (electrical) to the I/O Modules. Supervisory functions of I/O ModuleBus and power supply. Isolated power supply to I/O modules. Input power fused.	Communication interface between the CI801 or CI840/CI840A FCI and the TB820/TB820V2/TB840/TB840A ModuleBus Modem of an I/O cluster or ABB drives units via the Optical ModuleBus. TB842 connects to CI801 via TB806 and to CI840/CI840A via TU847 and TB806 for single I/O or via TU846 and TB846 for redundant I/O.
Redundant	No	No	No	Yes	Yes
Power Input	24 V d.c. (19.2 - 30)	24 V d.c. (19.2 - 30)	24 V d.c. (19.2 - 30)	24 V d.c. (19.2 - 30)	N/A
Power Input Fuse	2 AF	2 AF	2 AF	2 AF	
Power Consumption at 24 V d.c.	100 mA	96 mA	96 mA	120 mA	20 mA
Power Supply Monitoring Inputs	Max. input voltage: 30 V Min. input voltage for high level: 15 V Max. input voltage for low level: 8 V	N/A	N/A	Max. input voltage: 30 V Min. input voltage for high level: 15 V Max. input voltage for low level: 8 V	N/A
Power Dissipation	6 W	2.3 W	2.3 W	6 W	0.5 W
Maximum Ambient Temperature	55°C (131°F) Horizontal mounted 40°C (104°F) Vertical mounted	55°C (131°F) Horizontal mounted 40°C (104°F) Vertical mounted	55°C (131°F) Horizontal mounted 40°C (104°F) Vertical mounted	55°C (131°F) Horizontal mounted 40°C (104°F) Vertical mounted	55° C (131° F) Horizontal mounted 40° C (104° F) Vertical mounted
Electrical ModuleBus	Maximum of 12 I/O modules	N/A	N/A	Maximum of 12 single I/O modules or 6 pairs of redundant I/O modules	N/A
Optical ModuleBus	Maximum of 7 I/O clusters. Wavelength 650 nm	Local optical ModuleBus 1 and 2 with versatile link contacts, plastic or HCS. Field optical ModuleBus with ST bayonet contacts.	Local optical ModuleBus 1 and 2 with versatile link contacts, plastic or HCS. Field optical ModuleBus with SC contacts.	Maximum of 7 I/O clusters. Wavelength 650 nm	Fiber optic interface, one transmit and one receive connection for max. 10 Mbit/s. Wavelength 650 nm
Max optical cable length	Local cable: Plastic Optical Fiber (POF): Max 15 m. Hard Clad Silica (HCS): Max 200 m.	Local cable: Plastic Optical Fiber (POF): Max 15 m. Hard Clad Silica (HCS): Max 200 m. Field cable: Glass Optical fiber, multimode, 62.5/125 µm: Max 1 000 m. Glass Optical fiber, multimode, 50/125 µm: Max 100 m.	Local cable: Plastic Optical Fiber (POF): Max 15 m. Hard Clad Silica (HCS): Max 200 m. Field cable: Glass Optical fiber, single mode, 9/125 µm: Max 5 000 m.	Local cable: Plastic Optical Fiber (POF): Max 15 m. Hard Clad Silica (HCS): Max 200 m.	The module is equipped with Transmitter/Receiver for up to 10 Mbit/s. Both plastic and HCS (Hard Clad Silica) optic fiber with connectors (Agilent's, former Hewlett-Packard, Versatile Link) can be used with the TB842.
Power Output – ModuleBus	24 V max. = 1.4 A 5 V max. = 1.5 A	N/A	N/A	24 V max. = 1.4 A 5 V max. = 1.5 A	
Module termination units	N/A	N/A	N/A	TU807, TU840, TU841, TU847, TU848 or TU849	TB806, TU846 and TU847
MTU Keying code	N/A	N/A	N/A	AB	N/A
Dielectric test voltage	500 V a.c.	500 V a.c.	500 V a.c.	500 V a.c.	N/A
Rated insulation voltage	50 V	50 V	50 V	50 V	N/A
Width	58 mm (2.39 in.)	85.6 mm (3.37 in.)	85.6 mm (3.37 in.)	54 mm (2.13 in.)	17.6 mm (0.69 in.)
Depth	122 mm (4.8 in.)	58.5 mm (2.30 in.)	58.5 mm (2.30 in.)	96 mm (3.78 in.)	42.3 mm (1.67 in.)
Height	170 mm (6.7 in.)	136 mm (5.35 in.)	136 mm (5.35 in.)	119 mm (4.69 in.)	56.7 mm (2.23 in.)
Weight	300 g (0.66 lbs.)	210 g (0.46 lbs.)	210 g (0.46 lbs.)	200 g (0.44 lbs.)	90 g (0.20 lbs.)
Climatic operating conditions	0 to +55 °C (Storage -25 to +70 °C), RH=5 to 95 % no condensation, IEC/EN 61131-2 (2)				

Feature	TB820V2	TB825	TB826	TB840A	TB842
Certificates and standards ⁽³⁾	CE mark: Yes Electrical safety: IEC 61131-2, UL 508 Hazardous Location: C1 Div 2 cULus, C1 Zone 2 cULus, ATEX Zone 2 Marine certification: ABS, BV, DNV-GL, LR (*) Corrosive atmosphere ISA-S71.04: G3 Pollution degree: Degree 2, IEC 60664-1 Mechanical operating conditions: IEC/EN 61131-2 EMC: EN 61000-6-4 and EN 61000-6-2 Overvoltage categories: IEC/EN 60664-1, EN 50178 Equipment class: Class I according to IEC 61140; (earth protected) RoHS compliance: EN 50581:2012 WEEE compliance: DIRECTIVE/2012/19/EU				

(2) 0 to +40 °C compact MTUs on vertical DIN-rail. Approvals are issued for +5 to +55 °C.

(3) For detailed information on each module, please visit: 800xahardwareselector.com

(*) No Marine cert. for TB826

Feature	TU807	TU840	TU841	TU846	TU847	TU848	TU849	TU860
Article number	3BSE039025R1	3BSE020846R1	3BSE020848R11	3BSE022460R1	3BSE022462R1	3BSE042558R1	3BSE042560R1	3BSE078710R1
Function	Module termination unit (MTU) for single configuration of Optical ModuleBus Modem TB840/ TB840A. The MTU is a passive unit having connections for power supply, a single electrical ModuleBus, one TB840/TB840A and a rotary switch for cluster address (1 to 7) setting.	Module termination unit (MTU) for redundant configuration of Optical ModuleBus Modem TB840/ TB840A. The MTU is a passive unit having connections for power supply, double electrical ModuleBus, two TB840/ TB840A and a rotary switch for cluster address (1 to 7) setting.	Module termination unit (MTU) for redundant configuration of Optical ModuleBus Modem TB840/ TB840A, for use with non-redundant I/O. The MTU is a passive unit having connections for power supply, a single electrical ModuleBus, two TB840/ TB840A and a rotary switch for cluster address (1 to 7) setting.	Module termination unit (MTU) for redundant configuration of the field communication interface CI840/CI840A and redundant I/O. The MTU is a passive unit having connections for power supply, two electrical ModuleBuses, two CI840/ CI840A and two rotary switches for station address (0 to 99) settings.	Module termination unit (MTU) for redundant configuration of the field communication interface CI840/ CI840A. The MTU is a passive unit having connections for power supply, electrical ModuleBus, two CI840/CI840A and two rotary switches for station address (0 to 99) settings. A ModuleBus Optical Port TB842 can be connected to TU847 via TB806.	Module termination unit (MTU) for redundant configuration of Optical ModuleBus Modem TB840/ TB840A. The MTU is a passive unit having connections for two power supply (one for each modem), double electrical ModuleBus, two TB840/ TB840A and a rotary switch for cluster address (1 to 7) setting.	Module termination unit (MTU) for redundant configuration of Optical ModuleBus Modem TB840/ TB840A. The MTU is a passive unit having connections for two power supply, one for each modem, a single electrical ModuleBus, two TB840/ TB840A and a rotary switch for cluster address (1 to 7) setting.	Module termination unit (MTU) only for connecting S800 I/O modules to the Modulebus connector. Two mounting slots for redundant CI845 Ethernet FCI modules. Two mounting slots for redundant Ethernet Adapters. Not intended for functional safety applications. Also suitable for installation in hazardous areas classified as Zone 2 or Class I, Division 2.
Cable redundancy	No	No	No	No	No	Yes	Yes	Yes
Module redundancy	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Type	Single TB810/ TB840A, Single I/O, Single Power	Redundant TB840/ TB840A, Redundant I/O, Single Power	Redundant TB840/TB840A, Single I/O, Single Power	Redundant CI840/CI840A, Redundant I/O	Redundant CI840/CI840A, Single I/O	Redundant TB840/ TB840A, Redundant I/O, Dual Power	Redundant TB840/ TB840A, Single I/O, Dual Power	Redundant MTU for CI845, TC810, TC811 and S800 I/O
Power Input	24 V d.c. (19.2 - 30 V)	24 V d.c. (19.2 - 30 V)	24 V d.c. (19.2 - 30 V)	24 V d.c. (19.2 - 30 V)	24 V d.c. (19.2 - 30 V)	24 V d.c. (19.2 - 30 V)	24 V d.c. (19.2 - 30 V)	24 V d.c. (19.2 - 30 V)
Hot Swap	No	No	No	No	No	No	No	No
Mounting	Vertical or Horizontal							Vertical mounting
Power Consumption at 24 V d.c.	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Connector	N/A	N/A	N/A	PROFIBUS: DSUB9 connector Service ports: RJ45 connector	PROFIBUS: DSUB9 connector Service ports: RJ45 connector	N/A	N/A	Maximum 2 FCI modules. Maximum 2 Ethernet Adapters. Inlet and connector for I/O cluster.
Acceptable wire sizes	Solid: 0.2 - 2.5 mm ² Stranded: 0.2 - 2.5 mm ² , 24 - 12 AWG Recommended torque: 0.5 Nm	Solid: 0.2 - 2.5 mm ² Stranded: 0.2 - 2.5 mm ² , 24 - 12 AWG Recommended torque: 0.5 Nm	Solid: 0.2 - 2.5 mm ² Stranded: 0.2 - 2.5 mm ² , 24 - 12 AWG Recommended torque: 0.5 Nm	Solid: 0.2 - 2.5 mm ² Stranded: 0.2 - 2.5 mm ² , 24 - 12 AWG Recommended torque: 0.5 Nm	Solid: 0.2 - 2.5 mm ² Stranded: 0.2 - 2.5 mm ² , 24 - 12 AWG Recommended torque: 0.5 Nm	Solid: 0.2 - 2.5 mm ² Stranded: 0.2 - 2.5 mm ² , 24 - 12 AWG Recommended torque: 0.5 Nm	Solid: 0.2 - 2.5 mm ² Stranded: 0.2 - 2.5 mm ² , 24 - 12 AWG Recommended torque: 0.5 Nm	Solid: 0.25 - 10 mm ² , 24 - 8 AWG Stranded: 0.25 - 4 mm ² (with ferrule) / 0.25 - 6 mm ² (without ferrule), 24 - 8 AWG Recommended torque: 0.5 - 0.8 Nm

(1) Fuse type: Subminiature fuse 3.15 A.

- LT-5 Fast-Acting 622 series according to Littelfuse
- TR5-F Fuse-link No. 370 according to Wickmann
- MSF 250 according to Schurter

(2) 0 to +40 °C compact MTUs on vertical DIN-rail. Approvals are issued for +5 to +55 °C.

(3) For detailed information on each module, please visit: 800xahardwareselector.com

(*) Pending for TC811

Feature	TU807	TU840	TU841	TU846	TU847	TU848	TU849	TU860
Dielectric test voltage	500 V a.c.	500 V a.c	500 V a.c	500 V a.c	500 V a.c	500 V a.c	500 V a.c	500 V a.c.
Rated insulation voltage	50 V	50 V	50 V	50 V	50 V	50 V	50 V	50 V
Power Dissipation	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Height	186.5 mm (7.34 in.)	186.5 mm (7.34 in.)	186.5 mm (7.34 in.)	186.5 mm (7.34 in.)	186.5 mm (7.34 in.)	186.5 mm (7.34 in.)	186.5 mm (7.34 in.)	210 mm (8.26 in.)
Weight	450 g (0.99 lbs.)	450 g (0.99 lbs.)	450 g (0.99 lbs.)	500 g (1.1 lbs.)	500 g (1.1 lbs.)	450 g (0.99 lbs.)	450 g (0.99 lbs.)	500 g (1.1 lbs.)
Climatic operating conditions	0 to +55 °C (Storage -25 to +70 °C), RH=5 to 95 % no condensation, IEC/EN 61131-2 (2)							-40°C (-40°F) to +70°C (158°F) (Storage -40°C (-40°F) to +85°C (185°F)) RH=5 to 95 % no condensation
Certificates and standards ⁽³⁾								
Equipment class	Class I according to IEC 60536; (earth protected)	Class I according to IEC 60536; (earth protected)	Class I according to IEC 60536; (earth protected)	Class I according to IEC 60536; (earth protected)	Class I according to IEC 60536; (earth protected)	Class I according to IEC 60536; (earth protected)	Class I according to IEC 60536; (earth protected)	Class III according to IEC 61010-2-201
Protection rating	IP20 according to IEC 60529	IP20 according to IEC 60529	IP20 according to IEC 60529	IP20 according to IEC 60529	IP20 according to IEC 60529	IP20 according to IEC 60529	IP20 according to IEC 60529	IP20 according to IEC 60529
CE- marking	Yes							
Electrical Safety	cULus	cULus	cULus	cULus	cULus	cULus	cULus	IEC/EN 61010-1, IEC 61010-2-201, UL 61010-2-201, CSA C22.2 No. 61010-2-201
Hazardous location	cULus Hazardous Location Class 1 Zone 2, ATEX Zone 2	cULus Hazardous Location Class 1 Zone 2, ATEX Zone 2	cULus Hazardous Location Class 1 Zone 2, ATEX Zone 2	cULus Hazardous Location Class 1 Zone 2, ATEX Zone 2	cULus Hazardous Location Class 1 Zone 2, ATEX Zone 2	cULus Hazardous Location Class 1 Zone 2, ATEX Zone 2	cULus Hazardous Location Class 1 Zone 2, ATEX Zone 2	EN 60079-0, EN60079-7, EN60079-15, UL 12.12.01/ CSA C22.2 No. 213-17
Marine certificates	N/A	ABS, BV, DNV-GL, LR	ABS, BV, DNV-GL, LR	N/A	ABS, BV, DNV-GL, LR	ABS, BV, DNV-GL, LR	ABS, BV, DNV-GL, LR	-
RoHS compliance	EN 50581:2012							
WEEE compliance	DIRECTIVE/2012/19/EU							

(3) For detailed information on each module, please visit: 800xahardwareselector.com

S800 I/O

Extended warranty for S800 I/O Hardware

Extended warranty for S800 I/O Hardware

We can offer an extended warranty for one, two, three or four years in addition to normal warranty conditions for S800 I/O Hardware. See price list Extended Warranty.

S800 I/O

ISA-S71.04 level G3 Compliance

ISA-S71.04 level G3 Compliance

Modules are compliant to ISA-S71.04 level G3, unless explicitly stated differently.


Communication

Field Communication Interface

Field Communication Interface	Article no.
 CI801 ProfiBus FCI S800 interface Including: 1 pce Power Supply Connector 1 pce TB807 Modulebus Terminator The basic system software loaded in CI801 does not support the following I/O modules: DI825, DI830, DI831, DI885, AI880, DI880 and DO880.	3BSE022366R1
 CI840A Profibus DP-V1 Interface. For redundant communication interface two CI840A, and one TU847 or one TU846 must be ordered.	3BSE041882R1
 CI845 Ethernet FCI module Ethernet Fieldbus Communication Interface Module for connection of S800 I/O or Select I/O to Ethernet. For redundant configuration two Fieldbus Communication Interfaces CI845, two Ethernet Adapters TC810 and one TU860 or one TU865 are needed. For Select I/O High Integrity SIL3 one HI880 is needed.	3BSE075853R1
 TU846 MTU for CI840 For 1+1 CI840 Supporting redundant I/O. Vertical mounting of modules. Including: 1 pce Power Supply Connector 2 pcs TB807 Modulebus Terminator	3BSE022460R1
 TU847 MTU for CI840 For 1+1 CI840 Supporting non-redundant I/O. Vertical mounting of modules. Supporting non-redundant I/O. Including: 1 pce Power Supply Connector 1 pce TB807 Modulebus Terminator	3BSE022462R1
 TU860 MTU for Ethernet FCI and S800 I/O Ethernet Fieldbus Communication Interface Module Termination Unit for connection of single or redundant S800 I/O. Supports single or redundant Ethernet Fieldbus Communication Interface Module and single or redundant Ethernet Adapter. Mounting on vertical DIN-rail. Including: 1 pcs TL814K01 Empty slot protector HI module 2 pcs TB807 Modulebus terminatore	3BSE078710R1
 TC810 Ethernet Adapter for Ethernet FCI Ethernet Adapter for copper media with built in 2-port switch. Hosts two RJ45 ports. Use as single or redundant.	3BSE076220R1
 TC811 Ethernet Adapter Single Mode Fiber Ethernet Adapter for single mode fiber with built in 2-port switch. Hosts two LC ports. Use as single or redundant.	3BSE078714R1

Communication

Field Communication Interface

Field Communication Interface	Article no.
 Extra, Front label set FCI Sheet with 12 labels	3BSC970089R1
 Extra, Label set, item design. FCI Sheet with 40 labels.	3BSC970091R1
 Mounting kit, vertical CI801/CI840/TB840 For vertical mounting of CI801, CI840, and TB840 on a vertical DIN rail.	3BSE040749R1
 Mounting profile kit DIN rails and duct DIN rail length : 1650 mm + 210 mm (65 in.) + (8.3 in.).	3BSE049768R1
AI-profile with DIN Rail, C. Duct, 19 in. Mounting 465 mm (19") DIN rail length 429 mm (16,9 in.)	3BSE022255R1
AI-profile with DIN Rail, C. Duct, 24 in. Mounting 592 mm (24") DIN rail length 556 mm (21,9 in.)	3BSE022256R1

Communication

Upgrade Kit and Tool Cables

Upgrade Kit and Tool Cables	Article no.
 TK527V030 Interface cable, 3 m Used to connect a PC to CI801, CI810, CI820 and CI830 for download of software. Download to CI801 requires TK212A in addition. DE9 pin to DE9 socket. Note! This part is exempted from the scope of 2011/65/EU (RoHS) as provided in Article 2(4)(c), (e), (f) and (j) therein (ref.: 3BSE088609 – EU DECLARATION OF CONFORMITY – ABB Advant Master Process Control System)	3BSC950004R1
 TK212A Tool cable RJ45 8P8C plug Used to connect a PC to CI801, CI840 or CI840A for download of software. Download to CI801 requires a TK527V030 in addition. RJ45 (male) to Dsub-9 (female), length 3 m. RJ45 8P8C plug (with shell). Cable : UL2464 26 AWG x 8C.	3BSC630197R1
 FS801K01 Service adapter kit Including: 1 pcs Service adapter FS801 1 pcs cable TK802 For connection of CI801 to PC a cable TK212A is also needed.	3BSE038407R1

S800 I/O

S800 I/O Modules



Analog Input Modules		Article no.
	AI810 Analog Input 8 ch 0(4)..20 mA, 0..10 V, 12 bit, single ended. Use Module Termination Unit TU810, TU812, TU814, TU818, TU830, TU833, TU835, TU838, TU850.	3BSE008516R1
	AI815 Analog Input HART 8 ch 0(4)..20 mA, 0(1)..5 V, 12 bit, single ended. Current limited transmitter power distribution. Use Module Termination Unit TU810, TU812, TU814, TU818, TU830, TU833, TU835, TU838.	3BSE052604R1
	AI820 Analog Input 4 ch +-20 mA, 0(4)..20 mA, +-10 V, +-5 V, 0(1)..5 V, diff., 50 V CMV, Rin (curr) 250 Ohms, 14 bit + sign. Individually galvanic isolated channels. Use Module Termination Unit TU810, TU812, TU814, TU830, TU833.	3BSE008544R1
	AI825 Analog Input 4 ch -20..20 mA, -10..10 V, 14 bit + sign. Individually galvanic isolated channels. Use Module Termination Unit TU811, TU813, TU831.	3BSE036456R1
	AI830A Analog input RTD 8 ch Pt100, Ni100/120, Cu10, R. Use Module Termination Unit TU810, TU812, TU814, TU830, TU833.	3BSE040662R1
	AI835A Thermocouple/mV Input 8 ch Use Module Termination Unit TU810, TU812, TU814, TU818, TU830, TU833.	3BSE051306R1
	AI843 Thermocouple/mV Input S/R 8 ch Single or redundant. 16 bit. Use Module Termination Unit TU818, TU830, TU833, TU842, TU843, TU852.	3BSE028925R1
	AI845 Analog Input S/R HART 8 ch 0(4)..20 mA, 0(1)..5 V, 12 bit, single ended. Current limited transmitter power distribution. Advanced on-board diagnostics. HART support. Use Module Termination Unit TU810, TU812, TU814, TU818, TU830, TU833, TU835, TU838, TU844, TU845, TU854	3BSE023675R1
	AI890 Analog Input IS 8 ch 0(4)..20 mA single ended. Intrinsic Safety Interface. Use Module Termination Unit TU890 or TU891.	3BSC690071R1
	AI893 Analog Input TC/RTD IS 8 ch For TC and RTD sensors. Intrinsic Safety Interface. Use Module Termination Unit TU890 or TU891.	3BSC690141R1
	AI895 Analog Input IS HART 8 ch 4...20 mA single ended. Intrinsic Safety Interface and HART. Use Module Termination Unit TU890 or TU891.	3BSC690086R1

S800 I/O

S800 I/O Modules

Analog Output Modules	Article no.
	AO810V2 Analog Output 8 ch 0(4)...20 mA, 14 bit RL max 500/850 Ohm. Use module Termination Unit TU810, TU812, TU814, TU830 or TU833.
	AO815 Analog Output HART 8 ch 1x8 ch. 4...20 mA, 12 bit, RL max 750 Ohm. Use Module Termination Unit TU810, TU812, TU814, TU830 or TU833.
	AO820 Analog Output 4 ch +-20mA, 0(4)...20 mA, +-10 V, 12 bit+sign. Individually galvanic isolated channels. RL max 500 Ohm. Use Module Termination Unit TU810, TU812, TU814, TU830, TU833.
	AO845A Analog Output S/R HART 8 ch (0) 4...20 mA, 12 bit, RL max 750 Ohm. Single or redundant. Loop supervised DI function. Use Module Termination Unit TU810, TU812, TU814, TU830, TU833, TU842, TU843, TU852.
	AO890 Analog Output IS 8 ch 0(4)...20 mA. RL max 750 Ohm. Intrinsic Safety Interface. Use Module Termination Unit TU890 or TU891.
	AO895 Analog Output IS HART 8 ch 0(4)...20 mA. RL max 750 Ohm. Intrinsic Safety Interface and HART. Use Module Termination Unit TU890 or TU891.

S800 I/O

S800 I/O Modules

Digital Input Modules	Article no.
	DI810 Digital Input 24 V 16 ch Isolated in two groups of 8 channels. Use Module Termination Unit TU810, TU812, TU814, TU818, TU830, TU833, TU838, TU850.
	DI811 Digital Input 48 V 16 ch Isolated in two groups of 8 channels. Use Module Termination Unit TU810, TU812, TU814, TU818, TU830, TU833, TU838, TU850.
	DI814 Digital Input 24 V Current 16 ch Isolated in two groups of 8 channels. Current sourcing. Use Module Termination Unit TU810, TU812, TU814, TU830, TU833, TU838.
	DI818 Digital Input 24 V 32 ch Isolated in two groups of 16 channels. Use Module Termination Unit TU818, TU819, TU830.
	DI820 Digital Input 120V a.c. 8 ch Individually galvanic isolated channels. Use Module Termination Unit TU811, TU813, TU831, TU839, TU851.
	DI821 Digital Input 230V 8 ch Individually galvanic isolated channels. Use Module Termination Unit TU811, TU813, TU831, TU839, TU851.
	DI825 Digital Input 125 V SOE 8 ch Individually galvanic isolated channels. Use Module Termination Unit TU811, TU813, TU831.
	DI828 Digital Input, 120 V 16 ch Individually galvanic isolated channels. Use Module Termination Unit TU851.
	DI830 Digital Input 24 V SOE 16 ch Isolated in two groups of 8 channels. Use Module Termination Unit TU810, TU812, TU814, TU818, TU830, TU833, TU838, TU850.
	DI831 Digital Input 48 V SOE 16 ch Isolated in two groups of 8 channels. Use Module Termination Unit TU810, TU812, TU814, TU818, TU830, TU833, TU838, TU850.
	DI840 Digital Input 24 V S/R 16 ch. Single or redundant. Advanced On-Board diagnostics. Use Module Termination Unit TU810, TU812, TU814, TU818, TU830, TU833, TU838, TU842, TU843, TU852.
	DI890 Digital Input IS 8 ch Intrinsic Safety Interface. Individually galvanic isolated channels. Use Module Termination Unit TU890 or TU891.

S800 I/O

S800 I/O Modules

Digital Output Modules	Article no.	
	DO810 Digital Output 24 V 16 ch Isolated in two groups of 8 channels. 0.5 A, Short circuit proof. Use Module Termination Unit TU810, TU812, TU814, TU830, TU833.	3BSE008510R1
	DO814 Digital Output current 16 ch Isolated in two groups of 8 channels. 0,5 A , shortcut circuit proof. Current sinking. Use Module Termination Unit TU810, TU812, TU814, TU830, TU833, TU838.	3BUR001455R1
	DO815 Digital Output 24V 8ch Isolated in two groups of 4 channels. 2.0 A short circuit proof. Use Module Termination Unit TU810, TU812, TU814, TU830, TU833.	3BSE013258R1
	DO818 Digital Output 24V 32 ch Isolated in two groups of 16 channels. 0.5 A, Short circuit proof. Use Module Termination Unit TU818, TU819, TU830.	3BSE069053R1
	DO820 Digital Output 8 ch 24-230 V a.c./d.c. 3 A, cos phi>0.4, d.c. 42 W. Individually galvanic isolated channels. Use Module Termination Unit TU811, TU813, TU831, TU836, TU837, TU851.	3BSE008514R1
	DO821 Digital Output Relay 8 ch 24-230 V a.c./d.c.. 3 A, cos phi>0.4, d.c. 42 W, normal closed. Individually galvanic isolated channels. Use Module Termination Unit TU811, TU813, TU831, TU836, TU837, TU851.	3BSE013250R1
	DO828 Digital Output Relay 16 ch Individually galvanic isolated channels. 5-250 V a.c and 5-125 V d.c, max 2 A. Use Module Termination Unit TU851.	3BSE069055R1
	DO840 Digital Output S/R 16 ch Isolated in two groups of 8 channels. Single or redundant. 0.5 A. Advanced On-board diagnostics. Use Module Termination Unit TU810, TU812, TU814, TU830, TU833, TU842, TU843, TU852.	3BSE020838R1
	DO890 Digital Output IS 4 ch Intrinsic Safety Interface. Individually galvanic isolated channels. Use Module Termination Unit TU890 or TU891.	3BSC690074R1

S800 I/O

Pulse Counting Modules

Pulse Counting Modules		Article no.
	DP820 Pulse Counter RS-422 2 ch bidirectional pulse counters & frequency measurement, current, 5 V, (12 V), 24 V. 1,5 MHz Rated isol 50 V. Use Module Termination Unit TU810, TU812, TU814, TU830 and TU833.	3BSE013228R1
	DP840 Pulse Counter S/R 8 ch Pulse Counter or Frequency Measurement Module. Redundant or single. 0.5 Hz - 20 kHz. Use Module Termination Unit TU810, TU812, TU814, TU818, TU830, TU833, TU842, TU843, TU844, TU845, TU852 and TU854.	3BSE028926R1

S800 I/O

Label sets for I/O Modules

Label sets for I/O Modules	Article no.
 Transparent film fronts Set of 12 transparent plastic film fronts. To be used with ordinary paper quality.	3BSE072159R1
White colored plastic coated paper One sheet of size A4. Original paper quality. No need to use transparent films.	3BSE072160R1
Yellow colored plastic coated paper One sheet of size A4. Original paper quality. No need to use transparent films. To be used with DI880, DO880 and AI880A.	3BSE072161R1


S800 I/O

High Integrity I/O Modules

High Integrity I/O Modules	Article no.
 The modules can only be connected to a AC 800M controller PM857, PM863 or PM867. Direct connection to the modulebus and via the optical modulebus via TB840 (not TB820).	
AI880A Analog Input HI S/R HART 8 ch (0) 4..20 mA. 12 bit. HART communication. Single or redundant. High integrity, certified for SIL3. Requires configuration according to Safety Manual. Loop supervised DI function. Use Module Termination Unit TU834, TU844, TU845 and TU854.	3BSE039293R1
DI880 Digital Input HI S/R 16 ch 24 V d.c. inputs. High integrity, certified for SIL3. Single or redundant. Requires configuration according to Safety Manual. Use Module Termination Unit TU810, TU812, TU814, TU818, TU830, TU833, TU838, TU842, TU843 and TU852.	3BSE028586R1
DO880 Digital Output HI S/R 16 ch 24 V d.c., 0,5 A Outputs. High integrity, certified for SIL3. Single or redundant. Requires configuration according to Safety Manual. Use Module Termination Unit TU810, TU812, TU814, TU830, TU833, TU842, TU843 and TU852.	3BSE028602R1
 SS823 Voter and Over Voltage Protection Required in a High Integrity 800xA system. One per power supply unit, also at redundant configurations. Input d.c. 24 V. Dual 24 V to single 24 V, 20 A. Certified for SIL3 according to IEC 61508 DIN rail mounted.	3BSE038226R1

S800 I/O

Module Termination Units

Module Termination Units		Article no.
           	TU805K01 Termination Units 2- or 3-wire Includes 10 pcs of Termination Unit TU805 for DI801 and DO801.	3BSE035990R1
	TU810V1 Compact MTU, 50 V Compact Module Termination Unit 2x8 signal terminals.	3BSE013230R1
	TU811V1 Compact MTU, 250 V Compact Module Termination Unit 1x8 signal terminals.	3BSE013231R1
	TU812V1 Compact MTU, 50 V, D-sub Compact Module Termination Unit with 25 pin D-sub connector, rated isol. 50 V. D-sub (female) connector is not enclosed.	3BSE013232R1
	TU813 Compact MTU, 250V Crimped snap-in connectors.	3BSE036714R1
	TU814V1 Compact MTU, 50 V, snap-in con. Compact Module Termination Unit 2x8 Signal terminals for crimped snap-in connectors. Detachable (pluggable) connectors are enclosed.	3BSE013233R1
	TU818 Compact MTU, 50 V Compact Module Termination Unit with 1x32 (and 2x16) signal terminals.	3BSE069209R1
	TU819 Compact MTU, 50 V Compact Module Termination Unit with 2x25 pin D-sub connector, D-sub (female) connector is not enclosed.	3BSE068891R1
	TU830V1 Extended MTU, 50 V. Extended Module Termination Unit 2x16 signal terminals.	3BSE013234R1
	TU831V1 Extended MTU, 250 V Extended Module Termination Unit 2x8 signal terminals.	3BSE013235R1
	TU833 Extended MTU, 50 V 2x16 signal terminals, Spring-cage terminals.	3BSE038726R1
	TU834 Extended MTU, 50 V Used with AI880A. Shunt Stick not included.	3BSE040364R1
	TU835V1 Extended MTU, 50 V, Fused Extended Module Termination Unit 8 fused power outlets, 8 signal terminals.	3BSE013236R1
	TU836V1 Extended MTU, 250 V, Fused Extended Module Termination Unit 2x4 fused signals, 2x4 return terminals, 2x2 L, 2x2 N terminals.	3BSE013237R1
	TU837V1 Extended MTU, 250 V, Fused Extended Module Termination Unit 8x1 fused isol. signals, 8x1 L terminals, 2x6 N terminals.	3BSE013238R1
	TU838 Extended MTU, 50 V. Extended Module Termination Unit 2x4 fused transducer power outlets, 16 signal terminals, 2x4 return terminals, 2x2 L+, 2x2 L- terminals. Module is mounted horizontally.	3BSE008572R1
	TU839 Extended 250 V Extended Module Termination Unit, 2x8 signal terminals 2x4 fused sensor power.	3BSE046966R1
	TU842 Redundant MTU, 50 V. Used with redundant I/O. Horizontal DIN rail mounting.	3BSE020850R1
	TU843 Redundant MTU, 50 V Used with redundant I/O. Vertical DIN rail mounting.	3BSE021443R1

S800 I/O

Module Termination Units

Module Termination Units	Article no.
 TU844 Redundant MTU, 50 V Used with redundant I/O. Horizontal DIN rail mounting. Shunt Stick not included.	3BSE021445R1
 TU845 Redundant MTU, 50 V Used with redundant I/O. Vertical DIN rail mounting. Shunt Stick not included.	3BSE021447R1
 TU850 Extended MTU, 50 V 2x8 signal terminals and 2x8 disconnetable current limited sensor/transmitter outlet power terminals.	3BSE050930R1
 TU851 Extended MTU, 250 V Extended Module Termination Unit with 2x16 signal terminals.	3BSE068782R1
 TU852 MTU, Redundant, 50 V Used with redundant I/O. Horizontal DIN rail mounting. With 2x25 pin D-sub connector.	3BSE069964R1
 TU854 MTU, Redundant, 50 V Used with redundant I/O. Horizontal DIN rail mounting. With 1x25 pin D-sub connector. Shunt Stick not included.	3BSE069966R1
 TU890 IS MTU Module Termination Unit with Intrinsic Safety Interface, 3x9 signal terminals. Including wiring separator.	3BSC690075R1
 TU891 non-IS MTU Module Termination Unit for 3x9 signal terminals. For non Intrinsic Safety.	3BSC840157R1
 TY801K01 8 pcs Shunt Stick 125 + 125 ohms shunt. Used for AI845 and AI880A on TU834, TU844, TU845 and TU854.	3BSE023607R1
 TY804K01 8 pcs Shunt Stick 1000 ohms shunt. Used for DP840 on TU844, TU845 and TU854.	3BSE033670R1
 TY805K01 8 pcs Shunt Stick 125 + 125 ohms shunt with current limitation on transmitter power. Used for AI845 and AI880A on TU834, TU844, TU845 and TU854.	3BSE081160R1
 TY820K01 10 pcs Temperature Sensor TY820 is a temperature sensor with a PT 100 element. Used with AI835/AI835A and AI843 to measure cold junction temperature.	3BSE056980R1

S800L I/O

S800L I/O Modules

Analog Input Modules		Article no.
	AI801 Analog input 8ch, 0(4)...20 mA, 12 bit, single ended.	3BSE020512R1
Analog Output Modules		Article no.
AO801 Analog output 8ch, 0(4)...20 mA, 12 bit, RL max 850 Ohm.		3BSE020514R1
Digital Input Modules		Article no.
DI801 Digital Input 24 V 16 ch Current sink.		3BSE020508R1
DI802 Digital Input 120 V 8 ch. Individually galvanic isolated channels.		3BSE022360R1
DI803 Digital Input 230 V 8 ch. Individually galvanic isolated channels.		3BSE022362R1
Digital Output Modules		Article no.
DO801 Digital Output 24 V 16 ch Isolated in one group. 0.5 A, Short circuit proof.		3BSE020510R1
DO802 Digital Output Relay 8 ch 24-230 V, a.c./d.c. Individually galvanic isolated channels.		3BSE022364R1

S800L I/O

Label sets for S800L I/O Modules

Label sets for S800L I/O Modules		Article no.
	Label Set S800L, 16 ch Text colour: Black, Text style: Helvetica regular Text height: 2 mm. Material: Polyesterfilm Xeroperm t=0,12. Sheet with 12 labels for 16 channels I/O modules.	3BSE019419R1
	Label Set S800L, 8 ch Text colour: Black, Text style: Helvetica regular Text height: 2 mm, Material: Polyesterfilm Xeroperm t=0,12. Sheet with 12 labels for 8 channels I/O modules.	3BSE019419R2

S800 I/O and S800L I/O

ModuleBus Communication Parts

ModuleBus Communication Parts		Article no.
	TB805 Bus Outlet Modulebus extension cable adaptor D-sub 25, female. One required per extension cable TK801.	3BSE008534R1
	TB845 Dual Modulebus Outlet Modulebus extension cable adaptor two D-sub, female. Two TK801 cables for redundancy.	3BSE021437R1
	TB806 Bus Inlet Modulebus extension cable adaptor D-sub 25, male. One required per extension cable TK801.	3BSE008536R1
	TB846 Dual Modulebus Inlet Modulebus extension cable adaptor two D-sub, male. Two TK801 cables for redundancy.	3BSE021439R1
	TK801V003 Cable, 0.3 m Modulebus Extension Shielded Cable 0.3m D-sub 25, male-female.	3BSC950089R1
	TK801V006 Cable, 0.6 m Modulebus Extension Shielded Cable 0.6m D-sub 25, male-female.	3BSC950089R2
	TK801V012 Cable, 1.2 m Modulebus Extension Shielded Cable 1.2m D-sub 25, male-female.	3BSC950089R3
	TB807 Modulebus terminator Terminator for Modulebus.	3BSE008538R1
	TB820V2 Modulebus Cluster Modem Optical cluster modem for non redundant operation. Including: 1 pce Power Supply Connector 1 pce TB807 Modulebus Terminator	3BSE013208R1
	TB825 Optical Media Converter Multi Mode Short to long distance optical fiber conversion. For modulebus communication up to 1 000 m.	3BSE036634R1
	TB826 Optical Media Converter Single Mode Short to long distance optical fiber conversion. For modulebus communication up to 5000 m, for S800 I/O HI up to 20 000 m.	3BSE061637R1
	TB840A Modulebus Cluster Modem Optical cluster modem for 1+1 redundant operation. Use a TU840 MTU for redundant TB840/TB840A, dual ModuleBus. Use a TU841 MTU for redundant TB840/TB840A, single ModuleBus.	3BSE037760R1
	TB842 Modulebus Optical Port Used together with CI801 and CI840/CI840A FCI, connected via TB806 or TB846.	3BSE022464R1
	TU807 Termination Unit for TB840/TB840A For single modulebus I/O. Including: TB807	3BSE039025R1
	TU840 Termination Unit for 1+1 TB840 Support for redundant I/O. Including: 1 pce Power Supply Connector 2 pcs TB807 Modulebus Terminator	3BSE020846R1
	TU841 Termination unit for 1+1 TB840 Support for non-redundant I/O. Including: 1 pce Power Supply Connector 1 pce TB807 Modulebus Terminator	3BSE020848R1

S800 I/O and S800L I/O

ModuleBus Communication Parts

ModuleBus Communication Parts		Article no.
	TU848 Termination Unit for 1+1 TB840 MTU with individual power supply. Support for redundant I/O. Including: 1 pce Power Supply Connector 2 pcs TB807 Modulebus Terminator	3BSE042558R1
	TU849 Termination Unit for 1+1 TB840 MTU with individual power supply. Support for non-redundant I/O. Including: 1 pce Power Supply Connector 1 pce TB807 Modulebus Terminator	3BSE042560R1
	TK811V015 POF Cable, 1.5 m, Duplex 1.5 m latching duplex connector Duplex plastic fibre.	3BSC950107R1
	TK811V050 POF Cable, 5 m, Duplex 5 m latching duplex connector Duplex plastic fibre.	3BSC950107R2
	TK811V150 POF Cable, 15 m, Duplex 15 m latching duplex connector Duplex plastic fibre.	3BSC950107R3
	TK812V015 POF Cable, 1.5 m, Simplex 1.5 m latching connector Simplex plastic fibre.	3BSC950118R1
	TK812V050 POF Cable, 5 m, Simplex 5 m latching connector Simplex plastic fibre.	3BSC950118R2
	TK812V150 POF Cable, 15 m, Simplex 15 m latching connector Simplex plastic fibre.	3BSC950118R3

Power supplies and voters selection guide

Feature	SD831	SD832	SD833	SD834	SS823	SS832	SD853	SD854	SS855
Rated output current	3 A	5 A	10 A	20 A	20 A	10 A (20 A in parallel operation)	10 A	20 A	40 A
Rated output power	72 W	120 W	240 W	480 W	-	-	240 W	480 W	-
Rated output voltage	24 V d.c.	24 V d.c.	24 V d.c.	24 V d.c.	-	-	24 V d.c.	24 V d.c.	-
Rated input power	134/143 VA	240/283 VA	447/514 VA	547/568 VA	500 W	2 x 10 A			2 x 20 A
Mains/input voltage, nominal	100-240 V a.c. 110-300 V d.c.	100-120 V a.c. 200-240 V a.c. Auto-select input	100-120 V a.c. 200-240 V a.c. Auto-select input	100-240 V a.c. 110-150 V d.c.	1x24 V d.c.	2x24 V d.c.	100-240 V a.c. 110-150 V d.c.	100-240 V a.c. 110-150 V d.c.	-
Mains voltage variation allowed	100-240 V a.c. +10 % 110-300 V d.c. -20 % / +25 %	100-120 V a.c. +10 %, 200-240 V a.c. +10 %	100-120 V a.c. +10 %, 200-240 V a.c. +10 %	85-276 V a.c. 88-187 V d.c.	-	-	85-264 V a.c. 88-180 V d.c.	85-264 V a.c. / 88-180 V d.c.	-
Primary peak inrush current at power on	<28/<54 A	<10 A	<10 A	<13 A	-	-	6 A / 9 A peak	10 A / 4.5 A peak	-
Applications	SELV and PELV	SELV and PELV	SELV and PELV	SELV and PELV	-	-	SELV and PELV	SELV and PELV	-
Load sharing	-	-	-	Parallell connection	Yes	-	Parallell connection	Parallell connection	Two in parallell for voting 40 A
Supervision relay	No	No	No	Yes	Yes	Yes	Yes	Yes	No
Power Factor (at rated output power)	0.61/0.56	0.56/0.47	0.59/0.51	0.95/0.90	-	-	0.99/0.97	0.99/0.95	-
Heat dissipation	10/8 W	14/13 W	24/22 W	40/31 W	24 W at 20 A and 6 W at 5 A	18 W	16.4 W / 12.1 W, 120/230 V a.c.	29.6/22.1 W, 120/230 V a.c.	2 x 10 A: 1.7 W 2 x 20 A: 5.9 W
Efficiency factor (%)	88/89.8	89.4/90.2	91/91.6	92.4/93.9	-	-	93.6/95.2	94.2/95.6	-
Output voltage regulation at max. current	< 50 mV / < 100 mV	< 70 mV / < 100 mV s	< 70 mV / < 100 mV	< 10 mV / < 100 mV	1.2 V lower than input	0.85 V lower than input	< 50 mV	< 100 mV	-
Ripple (peak to peak)	< 50 mV	< 50 mV	< 50 mV	< 100 mV	-	-	< 50 mV	50 mV	-
Secondary voltage holdup time at mains blackout	29/120 ms	80/78 ms	46/47 ms	32/51 ms	-	-	37 ms	32 ms	-
Maximum output current (min)	3.3 A	6 A At ambient temp < 45 °C	12 A At ambient temp < 45 °C	30 A < 4 s	35 A (Overload)	25 A (Overload)	12 A At ambient temp < 45 °C	24 A At ambient temp < 45 °C	65 A (up to 5 seconds)
Maximum ambient temperature	55 °C	55 °C	65 °C	55 °C	55 °C	55 °C	70 °C	70 °C	70 °C

For detailed information on each module, please visit: 800xAhardwareselector.com

Power supplies and voters selection guide

Feature*	SD831	SD832	SD833	SD834	SS823	SS832	SD853	SD854	SS855
Primary: Recommended external fuse ⁽¹⁾	10-20 A	10-20 A	10-20 A	10-20 A	-	-	10-20 A	10-20 A	-
Secondary: Short circuit	4-8 A	10-14 A	14-18 A	Hiccup (2s on 17s off)	-	Max 25 A RMS	Hiccup (2s on 18s off)	Hiccup (2s on 18s off)	Max 26 A RMS
Secondary: Over-Voltage protection	< 39 V	< 39 V	< 39 V	< 37 V	< 30 V	-	Max 32 V	Max 32 V	-
Class of protection	I PE (Protective Earth) connection required				-	-	I PE (Protective Earth) connection required		III PE (Protective Earth) or chassis connection not required.
Protection rating	IP20 according to IEC 60529								
Width	32 mm (1.26 in.)	32 mm (1.26 in.)	60 mm (2.36 in.)	82 mm (3.23 in.)	116 mm (4.6 in.)	32 mm (1.26 in.)	39 mm (1.53 in.)	48 mm (1.88 in.)	36 mm
Depth	102 mm (4.02 in.)	117 mm (4.61 in.)	117 mm (4.61 in.)	127 mm (5.0 in.)	145 mm (5.8 in.) including connector	117 mm (4.61 in.)	117 mm (4.60 in.)	127 mm (5.00 in.)	127 mm
Height	124 mm (4.88 in.)	124 mm (4.88 in.)	124 mm (4.88 in.)	124 mm (4.88 in.)	132 mm (5.3 in.)	125 mm (4.9 in.)	124 mm (4.88 in.)	124 mm (4.88 in.)	124 mm
Mounting spacing Width mm	15 mm (0.59 in.)	15 mm (0.59 in.)	15 mm (0.59 in.)	15 mm (0.59 in.)	15 mm (0.6 in.)	15 mm (0.59 in.)	15 mm (0.59 in.)	15 mm (0.59 in.)	5 mm
Mounting spacing Height mm	40 mm (1.57 in.)	40 mm (1.57 in.)	40 mm (1.57 in.)	40 mm (1.57 in.)	25 mm (1.2 in.)	25 mm (1 in.)	40 mm (1.57 in.)	40 mm (1.57 in.)	top 40 mm, bottom 20 mm
Weight (lbs.)	430 g (0.9 lbs.)	500 g (1.1 lbs.)	700 g (1.5 lbs.)	1200 g (2.6 lbs.)	870 g (1.9 lbs.)	350 g (0.77 lbs.)	600 g (1.32 lbs)	830 g (1.83 lbs)	280 g
Corrosive atmosphere ISA-S71.04	G2	G2	G2	G2	G3	G2	G3	G3	G3
CE mark	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
ATEX Zone 2	No	No	No	No	Yes	No	Yes	Yes	Yes
IECEX Zone 2	-	-	-	-	-	-	Yes	Yes	Yes
Hazardous Location, Class 1 Div 2	No	No	No	Yes	No	No	Yes	Yes	Yes
Electrical safety	IEC 61131-2, UL 508, EN 50178						IEC 60950-1		
Pollution degree	Degree 2, IEC 60664-1								
Mechanical operating conditions	EN 61131-2								
EMC	EN 61000-6-4 and EN 61000-6-2								
Over voltage Categories	Over-voltage Category III (IEC/EN 60664-1)								
RoHS compliance	DIRECTIVE/2011/65/EU (EN 50581:2012)								
WEEE compliance	DIRECTIVE/2012/19/EU								

⁽¹⁾ Microcircuit Breaker (MCB), Characteristic B

* For detailed information on each module, please visit: 800xAhardwareselector.com

AC 800M and S800 I/O

Power Supplies

Power Supply		Article no.
	Modules are compliant to ISA-S71.04 level G3, unless explicitly stated differently	
	SD831 Power Supply, 3 A, G2 Compliant Input AC 100-240 V or DC 110-300 V. Output DC 24 V 3 A. If redundant power application is required connect to SS8XX voting unit. DIN rail mounted.	3BSC610064R1
	SD832 Power Supply, 5 A, G2 Compliant Input AC 100-120/200-240 V. Output DC 24 V 5 A, auto-select input. If redundant power application is required connect to SS8XX voting unit. DIN rail mounted.	3BSC610065R1
	SD833 Power Supply, 10 A, G2 Compliant Input AC 100-120/200-240 V, auto-select input. Output DC 24 V 10 A. If redundant power application is required connect to SS8XX voting unit. DIN rail mounted.	3BSC610066R1
	SD834 Power Supply, 20 A, G2 Compliant Input AC 100-240 V or DC 110-300 V. Output DC 24 V 20 A. If redundant power application is required connect to SS8XX voting unit. DIN rail mounted.	3BSC610067R1
	SD853 Power Supply, 10 A, G3 Compliant 10 A Power Supply Module. Input AC 100-240 V. Input DC 110-150 V. Output DC 24-28 V. Mounting on horizontal DIN rail. Width 39 mm.	3BSE088188R1
  	SD854 Power Supply, 20 A, G3 Compliant 20 A Power Supply Module. Input AC 100-240 V. Input DC 110-150 V. Output DC 24-28 V. Mounting on horizontal DIN rail. Width 48 mm.	3BSE088189R1
	SS832 Power Voting Unit, G2 Compliant Input DC 24 V. Dual 24 V to single 24 V, 2x10 A. DIN rail mounted.	3BSC610068R1
	SS855 Power Voting Unit 40 A, G3 Compliant Input DC 24 V. 2x20 A in and 1x40 A out. Mounting on horizontal DIN rail. With 36 mm.	2PAA125624R1
	Mains Breaker Kit for DIN Rail 115/230 V For 115/230 V AC with input terminals, breaker and 3 fused (6.3 A). Double output terminals. Width = 102,5 mm.	3BSE022262R1



S900 Remote I/O System

The S900 remote I/O system communicates with System 800xA or other controllers over PROFIBUS. Suitable for applications in the che-mical, pharmaceutical, oil and gas industries, S900 I/O can be installed in hazardous areas, thereby reducing marshalling and wiring costs.

Further maintenance savings can be achieved through S900’s extended diagnostics and the use of HART® compliant field devices.

- Three series of S900 I/O are available:
- S-series for applications in Zone 1 hazardous areas
 - B-series for applications in Zone 2 hazardous areas
 - N-series for applications in non hazardous areas

- Additional solutions for specific applications are available:
- Field housing – for wall mounting and field mounting in Zone 1 installations with system approval fully certified in accordance with ATEX. The high-grade steel housing is prepared for wall-mounting with facility for insulated screen rails or terminals.

The S900 components are based on a passive backplane suitable for mounting on a DIN rail or directly in a sub-distribution board. The passive backplane includes internal bus

communication, terminals for field circuits, communication, and power supply. The function modules are plugged into the backplane in their appropriate slots.

The redundant backplane has two slots for power supply units, two slots for communication interfaces, and 16 slots for function modules. Digital function modules have up to 8 channels, analog modules up to four. Therefore, when using a redundant backplane, 128 digital or 64 analog channels can be connected per station. In the case of the S and B series, up to ten S900 stations can be connected on a single fieldbus line.

- Key S900 benefits include:
- Intrinsically safe - can be installed in Zone 1 and Zone 2 areas.
 - Good price/performance ratio because external barriers have been removed and costs are reduced in terms of cabling, installation, hardware, and maintenance.
 - Easy configuration using either FDT/DTM or GSD files, allowing easy integration with System 800xA process control systems.
 - High availability of the plant thanks to redundancy and hot-swap capability of all components during operation.

Series	Assembly	Field devices / signals	Hazardous area approval
S series	In Zone 1	In Zones 2, 1 and 0 (intrinsically safe signals)	ATEX Zone 1 (Blue TU921S)
B series	In Zone 2	In Zones 2, 1 and 0 (intrinsically safe signals)	ATEX Zone 2 (Blue TU921B)
N series	In safe areas	In safe areas	No * (Black TU921N)

* Field devices mounted in Zone 1/Zone 0 can be connected to N-Series with additional IS barriers; a benefit of IS modules of S- and B-Series.



TU921B for ATEX Zone 2

	AMUR inputs	Binary 24 V	Binary 48 V	Binary 110 V	Binary 230 V	Binary Relay	Analog Unipolar	Analog Bipolar	Temperature RTD	Temperature T/C	SOE	HART	Intrinsic safety	Redundant	High integrity
I/O Features S900															
Digital I/O modules															
DX910S,B,N*	•												S,B		
Digital output modules															
DO910S,B,N*													S,B		
DO930N			•												
Pulse input modules															
DP910S,B,N*						•							S,B		
Analog input modules															
AI910S,B,N*							•						S,B		
AI930S,B,N*							•					•	S,B		
AI931S,B,N*							•					•	S,B		
AI950S,B,N*									•	•			S,B		
Analog output modules															
AO910S,B,N*							•						S,B		
AO920S,B,N*							•						S,B		
AO930S,B,N*							•					•	S,B		

* For details about S900 I/O modules, please visit: 800xAhardwareselector.com

S900 Remote I/O System

Ex zone 1 system components

Termination Unit		Article no.
	TU921S Redundant Termination Unit (TU16R-Ex)	3KDE175111L9210
	For 16 I/O-modules Redundant communication and power (Delivery includes CD910)	
Power Supply		Article no.
	SA920S Power Supply	3BDH000602R1
	For 24 V DC Do not mix SA910S with SA920S for redundancy (Observe Release Notes)	
Communication Interface		Article no.
	CI920AS Communication Interface V 2.1 (CIPBA-Ex)	3BDH000690R1
	Use only CI920AS with the same firmware for redundancy for PROFIBUS DP-V1 (Observe Release Notes).	

S900 Remote I/O System

Ex zone 1 system components

Digital Input or Output		Article no.
	DX910S Digital Input or Output (DIO8-Ex) Input for dry contact or NAMUR initiator Output for low power Intrinsic Safe valves.	3KDE175311L9100
	DO910S Digital Output (DO4-Ex) Output for Intrinsic Safe valves	3KDE175321L9100
	DP910S Frequency Input (FI2-Ex) Input for dry contact or NAMUR initiator	3KDE175361L9100
Analog Input		Article no.
	AI910S Analog input (AI4-Ex) Transmitter power supply, 4...20 mA	3KDE175511L9100
	AI930S Analog Input, HART (AI4H-Ex) Transmitter power supply, 4...20 mA	3KDE175511L9300
	AI931S Analog Input, HART (AI4H-Ex) Passive input, 0/4...20 mA	3KDE175511L9310
	AI950S Temperature (TI4-Ex) Pt100, Pt1000, Ni100 in 2-/3-/4- technology thermocouples type B, E, J, K, L, N, R, S, T Isolated inputs channel by channel.	3KDE175521L9500
Analog Output		Article no.
	AO910S Analog output (AO4-Ex) Output 0/4...20 mA	3KDE175531L9100
	AO920S Analog output, isolated (AO4I-Ex) Output 0/4...20 mA Isolated outputs channel by channel	3KDE175531L9200
	AO930S Analog output HART (AO4H-Ex) Output 0/4...20 mA	3KDE175531L9300

S900 Remote I/O System

Ex zone 2 system components

Termination Unit		Article no.
	TU921B Redundant Termination Unit (TU16R-B) For 16 I/O-modules Redundant communication and power (Delivery includes CD910)	3KDE175112L9210
Power Supply		Article no.
	SA920B Power Supply For 24 V DC The power supply filter type BP901S is not required. SA920B is the functional replacement for SA910B. Do not mix SA910B with SA920B for redundancy (Observe Release Notes)	3BDH000601R1

S900 Remote I/O System

Ex zone 2 system components

Communication Interface		Article no.
	CI920AB Communication Interface V 2.1 (CIPBA-B) Use only CI920AB with the same firmware for redundancy for PROFIBUS DP-V1 (Observe Release Notes).	3BDH000691R1
Digital Input or Output		Article no.
	DX910B Digital Input or Output (DIO8-B) Input for dry contact or NAMUR initiator Output for low power I.S. valves	3KDE175312L9100
	DO910B Digital Output (DO4-B) Output for I.S. valves	3KDE175322L9100
	DP910B Frequency Input (FI2-B) Input for dry contact or NAMUR initiator	3KDE175362L9100
Analog Input		Article no.
	AI910B Analog input (AI4-B) Transmitter power supply, 4...20 mA	3KDE175512L9100
	AI930B Analog Input, HART (AI4H-B) Transmitter power supply, 4...20 mA	3KDE175512L9300
	AI931B Analog Input, HART (AI4H-B) Passive input, 0/4...20 mA	3KDE175512L9310
	AI950B Temperature (TI4-B) Pt100, Pt1000, Ni100 in 2-/3-/4-technology Thermocouples type B, E, J, K, L, N, R, S, T Isolated inputs channel by channel	3KDE175522L9500
Analog Output		Article no.
	AO910B Analog output (AO4-B) Output 0/4...20 mA	3KDE175532L9100
	AO920B Analog output, isolated (AO4I-B) Output 0/4...20 mA Isolated outputs channel by channel	3KDE175532L9200
	AO930B Analog output HART (AO4H-B) Output 0/4...20 mA	3KDE175532L9300

S900 Remote I/O System

Safe area system components

Termination Unit		Article no.
	TU921N Redundant Termination Unit (TU16R) For 16 I/O-modules. Redundant communication and power. (Delivery includes CD910)	3KDE175113L9210
Power Supply		Article no.
	SA920N Power Supply For 24 V DC Do not mix SA910N with SA920N for redundancy (Observe Release Notes)	3BDH000600R1
Communication Interface		Article no.
	CI920AN Communication Interface V 2.1 (CIPBA) Use only CI920AN with the same firmware for redundancy for PROFIBUS DP-V1 (Observe Release Notes)	3BDH000692R1
Digital Input or Output		Article no.
	DX910N Digital Input or Output (DIO8) Input for dry contact or NAMUR initiator Output for low power valves	3KDE175313L9100
	DO910N Digital Output (DO4) Output for valves	3KDE175323L9100
	DO930N Relay Output (RO6) With 4 normally-open contacts and 2 changeover contacts	3BDS014114
	DP910N Frequency Input (FI2) Input for dry contact or NAMUR initiator	3KDE175363L9100

S900 Remote I/O System

Safe area system components

Analog Input		Article no.
	AI910N Analog input (AI4) Transmitter power supply, 4...20 mA	3KDE175513L9100
	AI930N Analog Input, HART (AI4H) Transmitter power supply, 4...20 mA	3KDE175513L9300
	AI931N Analog Input, HART (AI4H) Passive input, 0/4...20 mA	3KDE175513L9310
	AI950N Temperature (TI4) Pt100, Pt1000, Ni100 in 2-/3-/4-technology thermocouples type B, E, J, K, L, N, R, S, T Isolated inputs channel by channel	3KDE175523L9500
Analog Output		Article no.
	AO910N Analog output (AO4) Output 0/4...20 mA	3KDE175533L9100
	AO920N Analog output, isolated (AO4I) Output 0/4...20 mA. Isolated outputs channel by channel	3KDE175533L9200
	AO930N Analog output HART (AO4H) Output 0/4...20 mA	3KDE175533L9300

S900 Remote I/O System

Accessories

Fieldbus isolating repeater	Article no.
BI914S Fieldbus isolating repeater Separates an intrinsically safe RS485 fieldbus from a non intrinsically safe RS485 fieldbus with bus termination mounted in DIN rail mounted housing with IP20 protection one channel version BARTEC - 07-7311-97WP/K1E0	3BDH000649R1
BI923S Ring-coupler RS485 / FO - intrinsically safe – Slave Separates an intrinsically safe fibre optic ring from a non intrinsically safe RS485 fieldbus BARTEC - 07-7311-97WP5400 mounted in DIN rail mounted housing with IP20 protection (Slave) Optical Plug FSMA	3KDE175831L9230
BI924S Ring-coupler RS485 / FO intrinsically safe – Master Separates an intrinsically safe fibre optic ring from a non intrinsically safe RS485 fieldbus BARTEC - 07-7311-97WP5400 mounted in DIN rail mounted housing with IP20 protection (Master) Optical Plug FSMA	3KDE175831L9240
BI934S Ring-coupler RS485 / FO intrinsically safe Separates an intrinsically safe fibre optic ring from one intrinsically safe RS485 fieldbus segment Mounted in separate field housing BARTEC - 07-3103-2512/9003 Optical Plug FSMA	3BDH000674R0001

Accessories		Article no.
 IP920 Module housing	BP914S Intrinsically safe PROFIBUS-DP connector D-SUB Connector (color blue) for operating the intrinsically safe PROFIBUS-DP with CI920AS and CI920AB. Siemens 6ES7972-0DA60-0XA0 connector can only be used with CI920AS and CI920AB. Do not use in combination with CI920S or CI920B. This would violate the explosion protection and could cause destruction of CI920S or CI920B. For CI920S and CI920B connector BP910S has to be ordered as spare part.	3BSE067082R1
	IP920 Module housing IP20 protection for empty slots on the termination unit for use in S900 S, B, and N systems	3KDE175831L9200
	IL910 Insert labels For labeling the modules.	3KDE175839L9101

Software	Article no.
CD910 Additional Software CD-ROM incl S900 Documentation, Certificates, GSD (file) CD-ROM will be delivered with all TU921 and CB220 deliveries.	3KDE175839L9100

S900 Remote I/O System

Field Housing S900-FH660S

General Information

The Ex e field housings FH660S from stainless steel (1.4301) serves for the reception of one redundant termination unit (backplane) TU16R-Ex (Order-No. TU921S) as well as further components with ATEX-certification for the hazardous area in zone 1.

Dimensions 600x600x300 mm / for max 100 field cables

The field housings are pre-mounted with stopping plugs instead of cable glands. The cable glands have to be ordered separately at manufacturer Hummel or manufacturer Bimed.

To fulfill the ATEX-certification the following cable glands are recommended:

Manufacturer Hummel:

- Type HSK-M-EMV-Ex M16 (article no. 1646160050)
- Type HSK-M-EMV-Ex M20 (article no. 1646200051)
- Type HSK-M-EMV-Ex M32 (article no. 1646320050)

Manufacturer Bimed:

- Type EBS M16 (article no. EBS01M)
- Type EBS M20 (article no. EBS1M)
- Type EBS M25 (article no. EBS2M)

All S900 modules and power supply components have to be ordered separately!

Additional costs of air transport and courier transport ask under e-mail:

Orderbox-CtrlPr DEAPR/DEAPR/ABB or orderbox.control-products@de.abb.com

Internal Installation

Article no.



With system certificate.

FH660S-2000 Field housing

Including the following components:

- Termination Unit (backplane) TU921S
- 4 Terminals (UK10N)

Field housings are delivered without cable glands.

Cable glands have to be ordered separately

(see General information and Product Update 2PAA112874).

3KDE175804V2000

FH660S-2020 Field housing

Including the following components:

- Termination Unit (backplane) TU921S
- 4 Terminals (UK10N)
- 2 Switches

Field housings are delivered without cable glands.

Cable glands have to be ordered separately

(see General information and Product Update 2PAA112874).

3KDE175804V2020

S900 Remote I/O System

Field Housing S900-FH680S

General Information

The Ex e field housings FH680S from stainless steel (1.4301) serves for the reception of one redundant termination unit (backplane) TU16R-Ex (Order-No. TU921S) as well as further components with ATEX-certification for the hazardous area in zone 1.

Dimensions 600x800x300 mm / for max 100 field cables

The field housings are pre-mounted with stopping plugs instead of cable glands. The cable glands have to be ordered separately at manufacturer Hummel or manufacturer Bimed.

To fulfill the ATEX-certification the following cable glands are recommended:

Manufacturer Hummel:

- Type HSK-M-EMV-Ex M16 (article no. 1646160050)
- Type HSK-M-EMV-Ex M20 (article no. 1646200051)
- Type HSK-M-EMV-Ex M32 (article no. 1646320050)

Manufacturer Bimed:

- Type EBS M16 (article no. EBS01M)
- Type EBS M20 (article no. EBS1M)
- Type EBS M25 (article no. EBS2M)

All S900 modules and power supply components have to be ordered separately!

Additional costs of air transport and courier transport ask under e-mail:

Orderbox-CtrlPr DEAPR/DEAPR/ABB or orderbox.control-products@de.abb.com

Internal Installation	Article no.
With system certificate.	
FH680S-2020 Field housing Including the following components: • Termination Unit (backplane) TU921S • 4 Terminals (UK10N) • 2 Switches Field housings are delivered without cable glands. Cable glands have to be ordered separately (see General information and Product Update 2PAA112874)	3KDE175811V2020

Fieldbus Network

FOUNDATION Fieldbus Network Components

FOUNDATION Fieldbus HSE/H1 Linking Device	
LD 810HSE links the FOUNDATION Fieldbus HSE protocol to the FOUNDATION Fieldbus H1 protocol and vice versa. Up to 4 external powered H1 lines can be connected to one LD 810HSE. Two LD 810HSE can be combined to a redundant set of devices. In this case the Redundancy Link cable is required.	
Linking Devices	Article no.
 LD 810 HSE EX Linking Device LD 810 HSE EX module for DIN rail mounting with 4 H1 links and one HSE connector. The module itself needs external 24 VDC power supply. H1 links must be powered separately. Restrictions: Linking Device LD 810HSE Ex is not suitable for replacing one of the LD 800 Linking Devices in a redundant pair. To clarify, both devices in the redundant pair must be replaced with LD 810HSE Ex. Redundancy cable for LD 810HSE Ex can be made / procured by the end customer directly & need not be ordered through ABB.	3BSE091722R1

Fieldbus Network

PROFIBUS Network Components

PROFIBUS Redundancy Link Module RLM02	
The RLM02 is delivered with a printed manual.	
 RLM02, PROFIBUS Redundancy Link Module PROFIBUS Redundancy Link Module for PROFIBUS line redundancy. Converts a non-redundant PROFIBUS line to two redundant RS485 lines or vice versa.	3BSE091723R1
PROFIBUS DP Accessories	
PCO 011, PROFIBUS DP connector Max. 12 Mbit/s, 35° cable outlet, IP40, switchable bus termination Phoenix Contact article no. 2708232.	3BDZ000371R1
PCO 012, PROFIBUS DP connector Max. 12 Mbit/s, 35° cable outlet, IP40, switchable bus termination, programming connection SUB-D Phoenix Contact article no. 2708245	3BDZ000372R1

System 800xA

Media

Media

System 800xA®

System 800xA – Media		Article no.
These articles below, may only be selected when ordering a new 800xA system, or if the end-user has a valid Automation Software Maintenance agreement.		
	System 800xA 6.2 Media Box (SSD) Including: System 800xA 6.2 and User Documentation on a Solid State Drive device.	7PAA007816R1

Media

Library

Library – Media
Media can be downloaded from MyABB/My Control System.

Media

Dongles

Dongles	Article no.
	License dongle for USB Port For use in 800xA or Compact HMI systems. To be used with 800xA 5.1 Rev A and later.
	3BSE064644R1

Base System

Control System Lifecycle Management Program

This product is covered by ABB's Control System Lifecycle Management program.
To get more information, please contact your local ABB representative.

Base System

Engineering Systems

Engineering Systems	Article no.
Engineering System small 6.2 An engineering system which only can run in design mode. System Small works up to 5 engineering clients. For license details, please see pricelist 7PAA007966C/A.	7PAA007758R1
Engineering System large 6.2 An engineering system which only can run in design mode. System Large works with more than 5 engineering clients. For license details, please see pricelist 7PAA007966C/A.	7PAA007759R1

Base System

Engineering Systems options

Engineering Systems options	Article no.
Batch for Engineering, 800xA 6.2 Batch Server (singular/redundant) Batch Clients, 40 Batch Equipment, 1000 Batch Advanced phases, 20,000 Batch Spreadsheet Scheduler connections, 9 Batch Schedule Interface PR Batch History Clients, 5	7PAA007795R1

Control System Lifecycle Management Program

This product is covered by ABB's Control System Lifecycle Management program.
To get more information, please contact your local ABB representative.

Temporary Expansions

Engineering Systems options	Article no.
Temporary Engineering Workplace 6.2 (One is included with the Core System) Includes Control Configuration for AC 800M, Bulk Data Handling, and Graphic Configuration. Document Manager, Parameter Manager, I/O allocations function and Script Manager Professional. This engineering workplace is intended for situations when additional engineering workplaces are needed for a limited period of time, e.g. system expansions. It is time limited to 12 months. This article will generate a separate license file that is to be added in addition to the existing 800xA license file in the system. This additional license file needs to be tied to another MAC address or hardware dongle. If this additional license file is expanded, the original expiry date will be the same as before.	7PAA007801R1

System 800xA 6.2

Field-Kit System

Base System

Field-Kit systems

Field Kit 6.2	Article no.
System 800xA Field Kit 6.2, 6 months Includes one single use, temporary license (6 month from time of license generation) of Ethernet I/O Field Kit software for use in the configuration and checking of Ethernet based I/O systems without the need for 800xA system hardware (i.e. controllers or communications interfaces). Also, included is xStream Commissioning which automatically detects, configures and commissions smart devices (HART) and documents the loop check results. The software can be installed on a Windows 10 tablet or laptop in a single node configuration.	7PAA007820R1
System 800xA Field Kit 6.2, 12 months Includes one single use, temporary license (12 month from time of license generation) of Ethernet I/O Field Kit software for use in the configuration and checking of Ethernet based I/O systems without the need for 800xA system hardware (i.e. controllers or communications interfaces). Also, included is xStream Commissioning which automatically detects, configures and commissions smart devices (HART) and documents the loop check results. The software can be installed on a Windows 10 tablet or laptop in a single node configuration.	7PAA007821R1
System 800xA Field Kit 6.2, 18 months Includes one single use, temporary license (18 month from time of license generation) of Ethernet I/O Field Kit software for use in the configuration and checking of Ethernet based I/O systems without the need for 800xA system hardware (i.e. controllers or communications interfaces). Also, included is xStream Commissioning which automatically detects, configures and commissions smart devices (HART) and documents the loop check results. The software can be installed on a Windows 10 tablet or laptop in a single node configuration.	7PAA007797R1

System 800xA Networks

Control. Monitor. Communicate.

System 800xA Networks provide pre-configured network components that are tested with System 800xA to ensure top quality performance and provide protection against cyber threats.

Wired switches (NE800) - includes a set of rack- and DIN-mounted switches and a wide range of modular transceivers.

Redundant Network Routing Protocol (RNRP) routers are available as part of the System 800xA Networks portfolio developed for use with System 800xA.

System 800xA Networks enables you to take control of your network infrastructure, and benefit from the full potential of a robust, highly performing, and secure 800xA system.



NE870



NE801



PT801



NE810



NE840


System 800xA Networks selection guide

Specific feature*	NE801	NE802	NE810	NE820 (Limited)	NE840 (Classic)
Article number	3BSE080209R1	3BSE080237R1	3BSE080207R1	3BSE080208R1	3BSE080211R1
Managed	Lightly managed (configurable using physical dip-switches)	Lightly managed (configurable using physical dip-switches)	Managed	Managed	Managed
Dimension (W x H x D)	34 x 123 x 121 mm	34 x 123 x 121 mm	52 x 100 x 101 mm	175 x 105 x 122 mm	466 x 258 x 43 mm
Weight	0.2 kg	0.2 kg	0.7 kg	2.2 kg	3.8 kg
Degree of protection	IP21	IP21	IP40	IP40	IP40
Operating voltage	9.6 to 57.6 VDC redundant power input	9.6 to 57.6 VDC redundant power input	19 to 60 VDC redundant power input	16 to 60 VDC redundant power input	90 to 264VAC, 47 to 63 Hz
Rated current	350 mA @ 12 VDC	100 mA @ 12 VDC	240 mA @ 24 VDC 120 mA @ 48 VDC	930 (1120 ⁽¹⁾) mA @ 20 VDC 380 (450 ⁽¹⁾) mA @ 48 VDC	350 mA @ 120 VAC 60 Hz 220 mA @ 240 VAC 50 Hz
Ethernet TX	4 x 10/100 Mbit/s	4 x 10/100/1000 Mbit/s	8 x 10/100 Mbit/s	7 x 10/100/1000 Mbit/s, 8 x 10/100 Mbit/s	7 x 10/100/1000 Mbit/s, 8 x 10/100 Mbit/s
Ethernet SFP pluggable connections (FX or TX)	1 x LC-connection, 100 Mbit/s	1 x 10/100/1000 Mbit/s	2 x 10/100/1000 Mbit/s	4 x 10/100/1000 Mbit/s	4 x 10/100/1000 Mbit/s
Digital I/O	-	-	1 x 4-ports detachable screw terminal	1 x 4-ports detachable screw terminal	1 x 4-ports detachable screw terminal
Console	-	-	1 x 1 x 2.5 mm jack	1 x USB Micro-B connector	1 x USB Micro-B connector
Operating Temperature	-25 to +70 °C	-40 to +74 °C	-40 to +70 °C	-40 to +70 °C	-40 to +55 °C
Temperature Storage & Transport	-25 to +70 °C	-40 to +85 °C	-50 to +85 °C	-50 to +85 °C	-40 to +85 °C
Network redundancy	-	-	Fast reconfiguration of network typology (FRNT) FRNT ring coupling	Fast reconfiguration of network typology (FRNT) FRNT ring coupling	Fast reconfiguration of network typology (FRNT) FRNT ring coupling
Mounting	DIN-mounted	DIN-mounted	DIN-mounted	DIN-mounted	Rack-mounted
Marine certificate	DNV	DNV	DNV	DNV	DNV
G3 compliant	Compliant	Compliant	Compliant	Compliant	Compliant
MTBF ⁽²⁾	500,000 hours	1,182,374 hours	630,000 hours	303,000 hours	123,000 hours


⁽¹⁾ With 500 mA USB load

⁽²⁾ According to MIL-HDBK-217K


* For detailed information on each module, please visit: 800xAhardwareselector.com

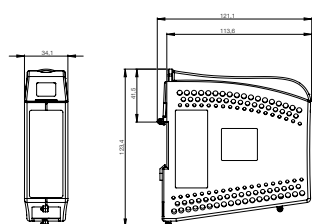


NE801/802

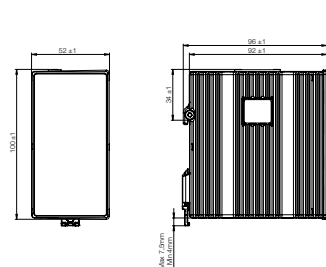

NE801

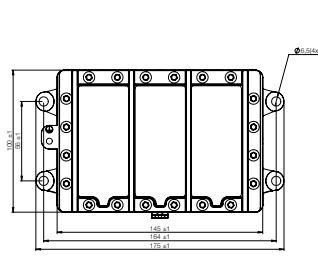

NE820

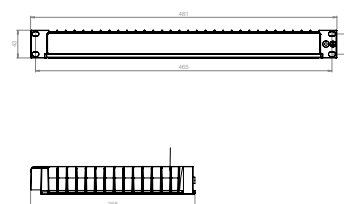


NE840

Specific feature	NE870	NE871
Article number	3BSE080239R1	3BSE080240R1
Managed	Yes	Yes
Routing	Yes	Yes
Firewall	Yes	Yes
Dimension (W x H x D)	134 x 100 x 122 mm	134 x 100 x 122 mm
Weight	1.5 kg	1.5 kg
Degree of protection	IP40	IP40
Operating voltage	16 to 60 VDC	16 to 60 VDC
Rated current	0.43 (0.60 ⁽¹⁾) A @ 20 VDC 0.19 (0.25 ⁽¹⁾) A @ 48 VDC	0.31 (0.48 ⁽¹⁾) A @ 20 VDC 0.15 (0.21 ⁽¹⁾) A @ 48 VDC
Ethernet TX	3 x 10/100/1000 Mbit/s, Ethernet TX, RJ-45 8 x 10/100 Mbit/s, Ethernet TX, RJ-45	3 x 10/100/1000 Mbit/s, Ethernet TX, RJ-45
Digital I/O	1 x 4-ports detachable screw terminal	1 x 4-ports detachable screw terminal
Console	1 x USB Micro-B connector	1 x USB Micro-B connector
Operating Temperature	-40 to +70 °C	-40 to +70 °C
Temperature Storage & Transport	-50 to +85 °C	-50 to +85 °C
Network redundancy	Redundant Network Routing Protocol (RNRP) Fast reconfiguration of network typology (FRNT) FRNT ring coppling	Redundant Network Routing Protocol (RNRP) Fast reconfiguration of network typology (FRNT) FRNT ring coppling
Mounting	DIN-mounted	DIN-mounted
Marine certificate	DNV	DNV
G3 compliant	Compliant	Compliant
MTBF ⁽²⁾	430,000 hours	430,000 hours

⁽¹⁾ With 500 mA USB load⁽²⁾ according to MIL-HDBK-217K**Agency approvals and standards compliance***

EMC	EN 50121-4	Railway applications – Electromagnetic compatibility – Emission and immunity of the signalling and telecommunications apparatus
	EN 55022	Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement
	EN 55024	Information technology equipment – Immunity characteristics Limits and methods of measurement
	EN 61000-6-1	Electromagnetic compatibility – Immunity for residential, commercial and light-industrial environments
	EN 61000-6-2	Electromagnetic compatibility – Immunity for industrial environments
	EN 61000-6-3	Electromagnetic compatibility – Emission standards for residential, commercial and light industrial environments
	EN 61000-6-4	Electromagnetic compatibility – Emission standard for industrial environments
	FCC part 15 Class A	
Safety	UL/IEC/EN 60950-1, IT equipment	
Marine	DNV Standard for Certification no. 2.4	
RoHS compliance	DIRECTIVE/2011/65/EU (EN 50581:2012)	
WEEE compliance	DIRECTIVE/2012/19/EU	

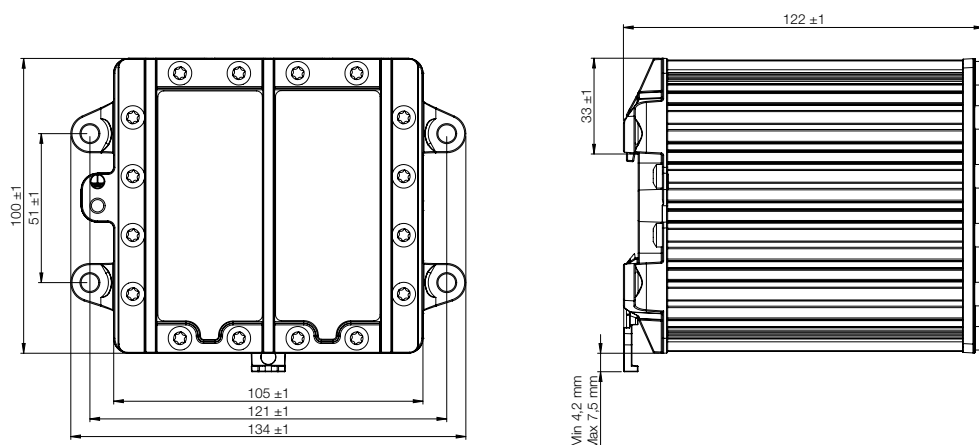* For detailed information on each module, please visit: 800xAHardwareselector.com

System 800xA Networks

Network switches

Network switches		Article no.
	NE801 Network switch DIN-mounted 5 ports lightly managed switch, 4 10/100 Mbit RJ45 ports & 100 Mbit LC optical port. Redundant 24V DC-power input.	3BSE080209R1
	NE802 Network switch DIN-mounted 5 ports lightly managed switch, 4 10/100/1000 Mbit RJ45 ports & 1 Gbit SFP port. Redundant 24V DC-power input.	3BSE080237R1
	NE810 Network switch DIN-mounted 10 ports managed switch, 8 10/100 Mbit RJ45 ports & 2 Gbit SFP ports. Redundant 24V DC-power input.	3BSE080207R1
	NE820 Network switch (Limited) DIN-mounted 19 ports managed switch, 8 10/100 Mbit RJ45 ports, 7 Gbit RJ45 ports & 4 Gbit SFP ports. Redundant 24V DC-power input.	3BSE080208R1
	NE840 Network switch, rack-mounted (Classic) Rack-mounted 19 ports managed switch, 8 10/100 Mbit RJ45 ports, 7 Gbit RJ45 ports & 4 Gbit SFP ports. 110/230V AC-power input.	3BSE080211R1

System 800xA Networks

Network routers/firewalls

Network routers/firewalls		Article no.
	NE870 Network router DIN-mounted 11 ports RNRP router and firewall, 3 10/100/1000 Mbit RJ45 ports and 8 10/100 Mbit RJ45 ports. Redundant 24V DC-power input.	3BSE080239R1
	NE871 Network router DIN-mounted 3 ports RNRP router and firewall, 3 10/100/1000 Mbit RJ45 ports. Redundant 24V DC-power input.	3BSE080240R1

System 800xA Networks

Network accessories

Network accessories	Article no.
 TK863 Cable USB 2,5 mm Cable. USB 2,5mm plug for NE810	3BSE080212R1
 TK864 Micro USB console cable Micro USB Console cable for e.g. NE820, NE840, NE870 & NE871	3BSE080213R1

System 800xA Networks

Modular Transceivers (SFPs)

Modular Transceivers (SFPs)		Article no.
The ABB range of Small Form-factor Pluggable (SFP) transceivers covers versions suitable for 100 Mbit/s and Gigabit applications. LC connectors are used as standard due to their small size.		
Operating temperature specification: -40 to +85 °C (-40 to +185 °F)		
	PT801 Optical transceiver Multimode, LC-connector, 2 km, 1310 nm, 100 Mbit/s	3BSE080214R1
	PT802 Optical transceiver Singlemode, LC-connector, 20 km, 1310 nm, 100 Mbit/s	3BSE080215R1
	PT803 Optical transceiver Singlemode,BiDi, 20 km, 1310 nm TX, 1550 nm RX, 100 Mbit/s	3BSE080223R1
	PT804 Optical transceiver Singlemode, BiDi, 20 km, 1550 nm TX, 1310 RX, 100 Mbit/s	3BSE080224R1
	PT805 Optical transceiver Singlemode, LC-connector, 40 km, 1310 nm, 100 Mbit/s	3BSE080216R1
	PT806 Optical transceiver Singlemode, BiDi, 40 km, 1310 nm TX, 1550 RX, 100 Mbit/s	3BSE080227R1
	PT807 Optical transceiver Singlemode, BiDi, 40 km, 1550 nm TX, 1310 RX, 100 Mbit/s	3BSE080228R1
	PT808 Optical transceiver Singlemode, LC-connector, 80 km,1550 nm, 100 Mbit/s	3BSE080217R1
	PT809 Optical transceiver Singlemode, BiDi, 80 km, 1310 nm TX, 1550 nm RX, 100 Mbit/s	3BSE080235R1
	PT810 Optical transceiver Singlemode, BiDi, 80 km, 1550 nm TX, 1310 nm RX, 100 Mbit/s	3BSE080236R1
	PT811 Optical transceiver Singlemode, LC-connector, 120 km,1550 nm, 100 Mbit/s	3BSE080218R1
	PT812 Optical transceiver Singlemode, BiDi, 120 km, 1550 nm TX, 1490 nm RX, 100 Mbit/s	3BSE080233R1
	PT813 Optical transceiver Singlemode, BiDi, 120 km, 1490 nm TX, 1550 nm RX, 100 Mbit/s	3BSE080234R1

System 800xA Networks

Modular Transceivers (SFPs)



Modular Transceivers (SFPs)	Article no.
PT814 Optical transceiver RJ-45, 100 m, 10/100 Mbit/s TX	3BSE080232R1
PT831 Optical transceiver Multimode, LC-connector, 550 m, 850 nm, SX, 1000 Mbit/s	3BSE080222R1
PT832 Optical transceiver Multimode, LC-connector, 2 km, 1310 nm, SX+, 1000 Mbit/s	3BSE080225R1
PT833 Optical transceiver Singlemode, LC-connector, 10 km, 1310 nm, LX, 1000 Mbit/s	3BSE080219R1
PT834 Optical transceiver Singlemode, BiDi, 20 km 1310 nm TX, 1490 nm RX, 1000 Mbit/s	3BSE080229R1
PT835 Optical transceiver Singlemode, BiDi, 20 km, 1490 nm TX, 1310 nm RX, 1000 Mbit/s	3BSE080230R1
PT836 Optical transceiver Singlemode, LC-connector, 50 km, 1550 nm, XD, 1000 Mbit/s	3BSE080220R1
PT837 Optical transceiver Singlemode, LC-connector, 80 km, 1550 nm, ZX, 1000 Mbit/s	3BSE080221R1
PT838 Optical transceiver Singlemode, LC-connector, 110 km, 1550 nm, EZX, 1000 Mbit/s	3BSE080231R1
PT839 Optical transceiver RJ-45, 100 m, 1000 Mbit/s TX	3BSE080226R1

Specifications Optical Transceivers

Product title	Article number	Type	Link speed (Mbit/s)	Indicative range (km)	Power budget (dB)	TX/RX wavelength (nm)
PT801	3BSE080214R1	Multi mode	100	2	20	1310/1310
PT802	3BSE080215R1	Single mode	100	20	17	1310/1310
PT803	3BSE080223R1	Single mode, BiDi	100	20	18	1310/1550
PT804	3BSE080224R1	Single mode, BiDi	100	20	18	1550/1310
PT805	3BSE080216R1	Single mode	100	40	30	1310/1310
PT806	3BSE080227R1	Single mode, BiDi	100	40	26	1310/1550
PT807	3BSE080228R1	Single mode, BiDi	100	40	26	1550/1310
PT808	3BSE080217R1	Single mode	100	80	30	1550/1550
PT809	3BSE080235R1	Single mode, BiDi	100	80	29	1310/1550
PT810	3BSE080236R1	Single mode, BiDi	100	80	35	1550/1310
PT811	3BSE080218R1	Single mode	100	120	35	1550/1550
PT812	3BSE080233R1	Single mode, BiDi	100	120	32	1550/1490
PT813	3BSE080234R1	Single mode, BiDi	100	120	32	1490/1550
PT814	3BSE080232R1	RJ45	10/100	0.1	-	-
PT831	3BSE080222R1	Multi mode	1000	0.3-0.55	9	850/850
PT832	3BSE080225R1	Multi mode	1000	1-2	1	1310/1310
PT833	3BSE080219R1	Single mode	1000	10	11	1310/1310
PT834	3BSE080229R1	Single mode, BiDi	1000	20	15	1310/1490
PT835	3BSE080230R1	Single mode, BiDi	1000	20	15	1490/1310
PT836	3BSE080220R1	Single mode	1000	50	20	1550/1550
PT837	3BSE080221R1	Single mode	1000	80	24	1550/1550
PT838	3BSE080231R1	Single mode	1000	110	30	1550/1550
PT839	3BSE080226R1	RJ45	1000	0.1	-	-

For detailed information on each Optical Transceiver, see the SFP table at: 800xahardwareselector.com/products/type/networks

Extended Warranty Time

S800 I/O, S900 I/O, Fieldbus and AC 800M controllers

Extended warranty time on hardware for S800 I/O, S900 I/O, Fieldbus and AC 800M

Article no.

Terms and conditions for the supply of products from Process Automation, Process Control Products within ABB AB in Sweden is valid.

Note that the price for the Extended Warranty Time order will be calculated as a percentage of the affected S800 I/O, S900 I/O, Fieldbus, AC 800M and Compact 800 HW articles in the accompanying order.

Extended Warranty, 12 additional months

3BSE049878R1

12 additional months warranty time – S800 I/O, S900 I/O, Fieldbus and AC 800M.

Extended Warranty, 24 additional months

3BSE049878R2

24 additional months warranty – S800 I/O, S900 I/O, Fieldbus and AC 800M.

Extended Warranty, 36 additional months

3BSE049878R3

36 additional months warranty – S800 I/O, S900 I/O, Fieldbus and AC 800M.

Extended Warranty, 48 additional months

3BSE049878R4


48 additional months warranty – S800 I/O, S900 I/O, Fieldbus and AC 800M.



S800 I/O



AC 800M controller

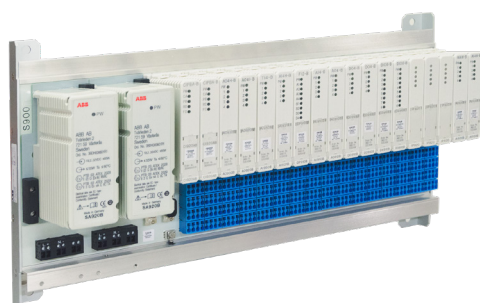

S900 I/O



Fieldbus Linking Device

ABB Ability™ System 800xA

References

This page gives you references and links to more useful ABB Ability™ System 800xA information.
For more information about System 800xA please also visit our web: solutions.abb/800xA

System 800xA References

- [1] System 800xA 6.2 System Guide Summary, 7PAA007862, rev A
- [2] System 800xA 6.2 System Guide, Technical data and configuration, 3BSE041434D6200, rev A
- [3] For more information about System 800xA please visit: solutions.abb/800xA
- [4] For more information about 800xA hardware please visit: 800xahardwareselector.automation.abb.com
- [5] For information and support about Distributed Control Systems, please visit: solutions.abb/controlsystems

System 800xA Hardware Selector

Choosing the right hardware made easy

ABB

DATA SHEET

CI801

System 800xA hardware selector



S800 I/O is a comprehensive, distributed and modular process I/O system that communicates with parent controllers and PLCs over industry-standard field buses. The CI801 Fieldbus Communication Interface (FCI) module is a configurable communication interface that performs operations such as signal processing, gathering of supervision information, OSP handling, Hot Configuration InRun, HART pass-through and configuration of I/O modules. The FCI connects to the controller through of the PROFIBUS-DPv2 fieldbus.

Features and benefits

- PROFIBUS DP PROFIBUS-DPv2 fieldbus interface.
- Supervisory functions of I/O ModuleBus
- Isolated power supply to I/O modules
- OSP handling and configuration
- Input power fused
- Hot Configuration In Run
- HART pass-through

General info	
Protocol	PROFIBUS DPv2
Article number	3BSE02366R
Master or slave	Slave
Line redundancy	No
Module redundancy	No
Hot Swap	No
Used together with H1 Controller	Yes

Detailed data	
24V consumption typ.	140 mA

DATA SHEET CI801 | 2022-12-07 | Copyright © 2022 ABB

When planning your new project or expansion, finding the right hardware can be a challenge.

Check out the new web based tool that helps you find the hardware you need in a few clicks:

- Quick filtering according to your needs
- Compare different units at a glance
- Find matching termination units
- Download the outline of all modules pdf or export individual data-sheets for each item

Start using System 800xA Hardware Selector at:
800xahardwareselector.automation.abb.com

[illegible]

solutions.abb/800xA
solutions.abb/controlsystems
800xahardwareselector.com

800xA is a registered trademark of ABB. All rights to other trademarks reside with their respective owners.

We reserve the right to make technical changes to the products or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not assume any responsibility for any errors or incomplete information in this document.

We reserve all rights to this document and the items and images it contains. The reproduction, disclosure to third parties or the use of the content of this document –including parts thereof – are prohibited without ABB's prior written permission.

Copyright© 2026 ABB
All rights reserved

